Allure Design
Magneet rail



Smart Lighting Solutions
48V Low Voltage Track System

Why low voltage 48V mini track?



- Low voltage products are very small in size and have an minimalistic look.

- Low voltage fixture can be moved very easily and can be used in applications where lighting fixtures are accessible to people, without any risk.

- Low voltage tracks can be used for smart lighting, easy to control whole system of all lights.




Smart Lighting, More Comfortable

Easy Smart Lighting Solutions

DALI, RF, CASAMBI

DALI Control

Wired connection
Brightness 0.1~100% dimming
Tunable white 2700~5700K

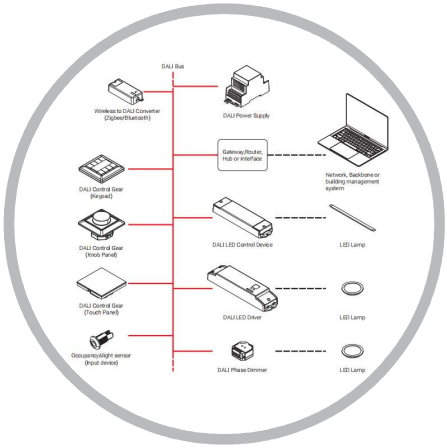

RF Remote Control

Wireless controllers
Brightness 0.1~100% dimming
Tunable white 2700~5700K



CASAMBI App Control

Mobile bluetooth wireless
Brightness 1~100% dimming
Tunable white 2700~5700K



INDEX

48V Low Voltage Smart Lighting

48V Tracks • 05


T1


T2


T3


T4


T5

48V Track Accessories • 09


HT1


HT2


HT3


HT4


VT1


VT2


VT3


VT4


ET1


ET2


ET3


ET4


ET5


PTX



ITX


LTX


CT2


PT2


DS1000/ 2000/ 3000

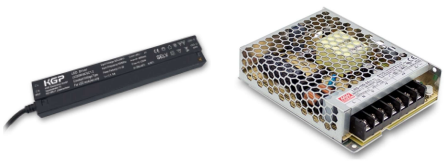
POWER SUPPLY: AC100-240V TO DC48V

48V 10/11 Series • 11



D35 D45 D55

48V 20/21 Series • 29



D62 D90

48V Linear Light • 35



LL22 LS22 LA22

48V 01 Series • 45



TL01 D30A TL01 D40A TL01 D40B TL01 D50B TL01 D55B TL01 D90A TL01 D100A

TL01 D40C


Control System DALI, RF Remote Control • 63



48V Low Voltage LV26 Series Track System

Tracks






T1

Model No.	Description	Color of housing
ALL-LV26T1-1000	T1 48V Mini Track 1.0 Meter	Black/ White
ALL-LV26T1-1500	T1 48V Mini Track 1.5 Meter	Black/ White
ALL-LV26T1-2000	T1 48V Mini Track 2.0 Meter	Black/ White
ALL-LV26T1-3000	T1 48V Mini Track 3.0 Meter	Black/ White






T2

Model No.	Description	Color of housing
ALL-LV26T2-1000	T2 48V High Track 1.0 Meter	Black/ White
ALL-LV26T2-1500	T2 48V High Track 1.5 Meter	Black/ White
ALL-LV26T2-2000	T2 48V High Track 2.0 Meter	Black/ White
ALL-LV26T2-3000	T2 48V High Track 3.0 Meter	Black/ White






T3

Model No.	Description	Color of housing
ALL-LV26T3-1000	T3 48V Trimless High Track 1.0 Meter	Black/ White
ALL-LV26T3-1500	T3 48V Trimless High Track 1.5 Meter	Black/ White
ALL-LV26T3-2000	T3 48V Trimless High Track 2.0 Meter	Black/ White
ALL-LV26T3-3000	T3 48V Trimless High Track 3.0 Meter	Black/ White






T4

Model No.	Description	Color of housing
ALL-LV26T4-1000	T4 48V Standard Track 1.0 Meter	Black/ White
ALL-LV26T4-1500	T4 48V Standard Track 1.5 Meter	Black/ White
ALL-LV26T4-2000	T4 48V Standard Track 2.0 Meter	Black/ White
ALL-LV26T4-3000	T4 48V Standard Track 3.0 Meter	Black/ White






T5

Model No.	Description	Color of housing
ALL-LV26T5-1000	T5 48V Up-Down Track 1.0 Meter	Black/ White
ALL-LV26T5-1500	T5 48V Up-Down Track 1.5 Meter	Black/ White
ALL-LV26T5-2000	T5 48V Up-Down Track 2.0 Meter	Black/ White
ALL-LV26T5-3000	T5 48V Up-Down Track 3.0 Meter	Black/ White

Installation

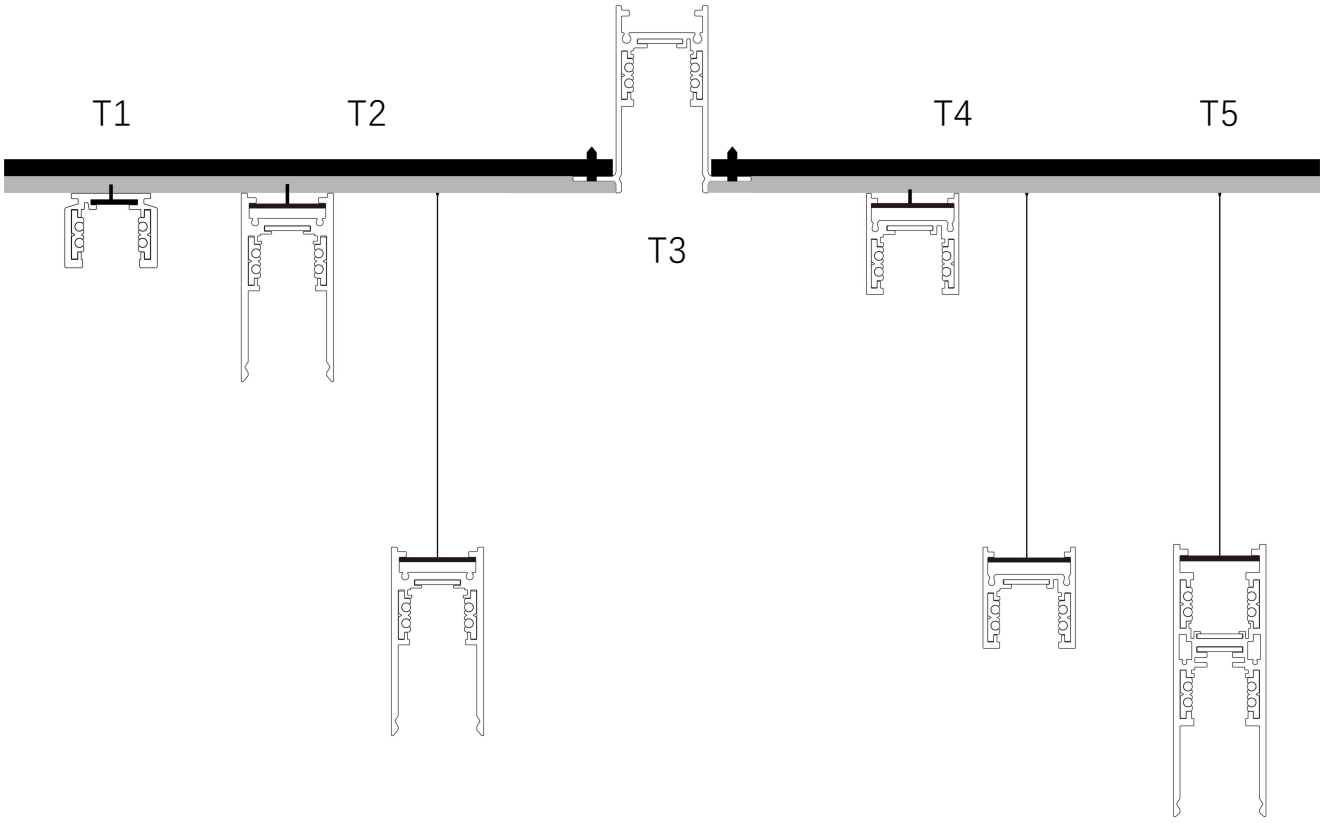

T1 Short Arm For T1/T4 Type Track, T2 Long Arm For T2/T3/T5 Track

A10 A11 Series





A20 A21 Series



T1 arm T2 arm




T2 arm

TL01 Series



T1 arm T2 arm

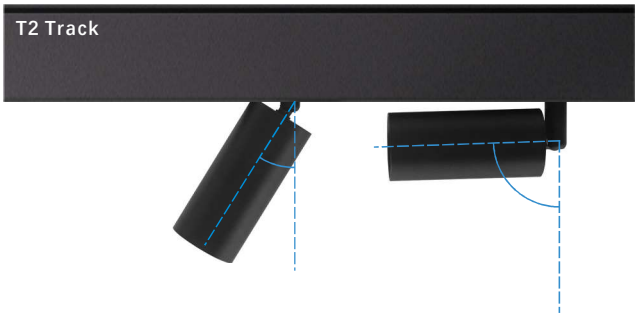

T1 arm T2 arm

T1 arm in T2 track, can't be adjusted to the top side

Accessories

Professional
Track light



Track adapter

Lamp body

Lens

Optical cover

Honeycomb cover

Front ring


Zoom lens units

Snoot

Barn door

Accessories






ALL-LV26AC-HT1

T1 Horizontal L-Track Housing+Connector HT1(For T1 Track Only)

Black/ White






ALL-LV26AC-VT1

T1 Vertical L-Track Housing VT1 (For Connector LTX)

Black/ White






ALL-LV26AC-HT2

T2 Horizontal L-Track Housing HT2 (For Connector LTX)

Black/ White






ALL-LV26AC-VT2

T2 Vertical L-Track Housing VT2 (For Connector LTX)

Black/ White






ALL-LV26AC-HT3

T3 Horizontal L-Track Housing HT3 (For Connector LTX)

Black/ White






ALL-LV26AC-VT3

T3 Vertical L-Track Housing VT3 (For Connector LTX)

Black/ White






ALL-LV26AC-HT4

T4 Horizontal L-Track Housing HT4 (For Connector LT1)

Black/ White






ALL-LV26AC-VT4

T4 Vertical L-Track Housing VT4 (For Connector LTX)

Black/ White






ALL-LV26TA-ET1

T1 End Cap ET1

Black/ White






ALL-LV26TA-ET2（ALL-LV26TA-ET3） End Cap ET2/ET3

Black/ White






ALL-LV26TA-ET4

T4 End Cap ET4

Black/ White






ALL-LV26TA-ET5

T5 End Cap ET5

Black/ White






ALL-LV26AC-PTX Power

Feed (For All Tracks) Black/

White White






ALL-LV26AC-ITX

Straight Connector (For All Tracks)

Black/






ALL-LV26AC-LTX

Flexible Connetor Horizontal or Vertical (For All Tracks)

Black/ White





ALL-LV26TA-CT2

Aluminum Connection (For T2/ T3/ T4/ T5)

Black/ White





ALL-LV26T2-DS1000/ 2000/ 3000

Dust Cover 1.0/ 2.0/ 3.0 Meter (For T2/ T3/ T5)

Black/ White





ALL-LV26TA-PT2

Suspension Pendant Set Steel Wire 1.5 Meter (For T2/ T3/ T4/ T5)

Black/ White





POWER SUPPLY (Inside Track For T2/T3/T5 Track)

100W 150W 230W

AC200-240V To DC48V





POWER SUPPLY (Outside The Track Rail)

150W 250W 50W 100W 150W 200W 350W

AC200-240V To DC48V AC85-264V To DC48V

10/11 Series
48V Smart Lighting DALI, Remote Control

Zoomable



1035A



1045A



1055A

Fixed lens



1135L



1145L



1155L



Black



Black
+Lens cover



Black
+ Honeycomb



Black
+Snoot




Black
+Barn door



White



White
+Lens cover



White
+ Honeycomb



White
+Snoot



White
+Barn door



Black



White



White+Black ring



Black+ Honeycomb



White+Honeycomb




White+Black ring
+Honeycomb

10 Zoomable Light Beam
48V Smart Lighting DALI, Remote Control





30°
Vertical 120°
Zoom 8~50°
DALI
RF
2.4G
CASAMBI

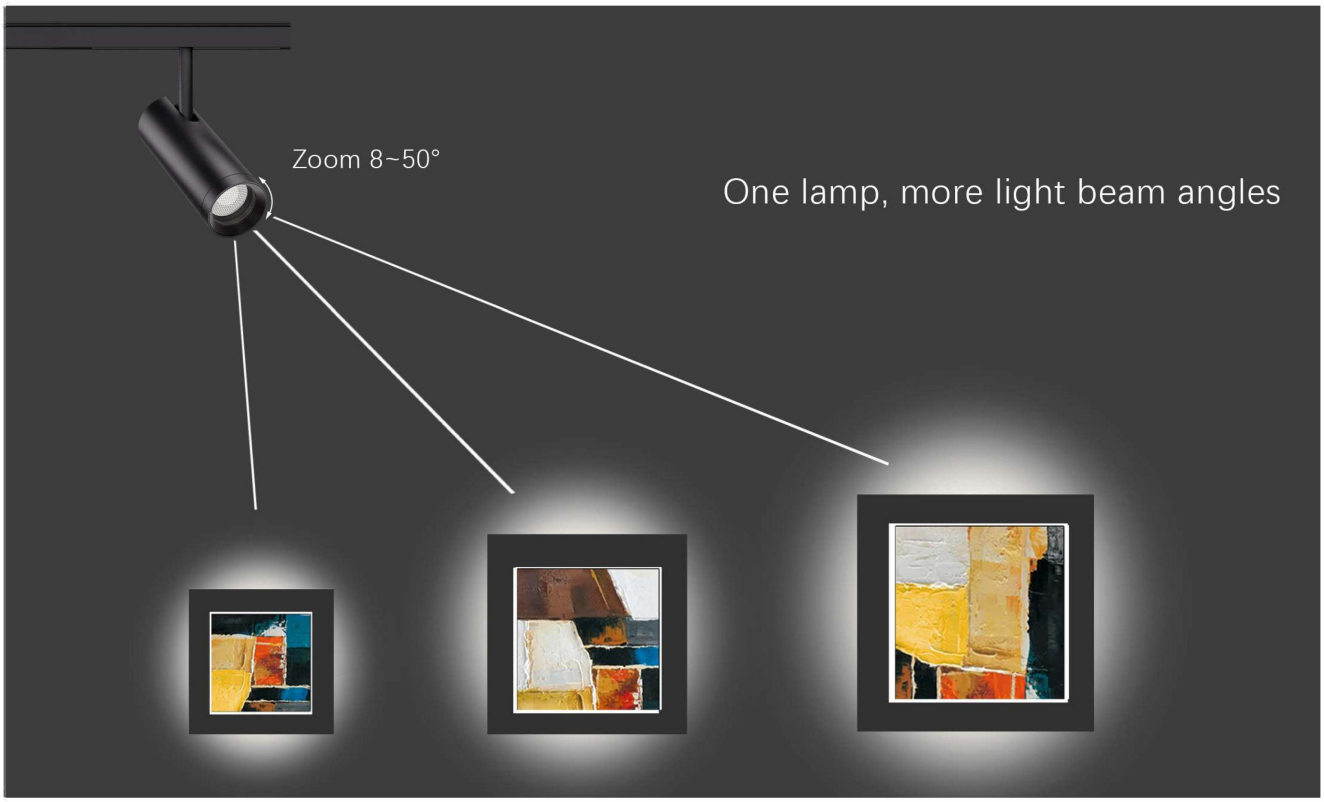
Zoom 8~50°
One lamp, more light beam angles

1035A Zoomable 5W










CE | 5 years Warranty | Flicker Free | DALI | RF

Model No.	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
1035A (LV26DAB)	5W	DALI Brightness Dim	D35*H86	8~40°	27/30/35/4000K	Ra90	180lm
1035A (LV26DAC)	5W	DALI Tunable White	D35*H86	8~40°	2700~5700K	Ra90	170lm
1035A (LV26RFB)	5W	RF Remote Brightness Dim	D35*H86	8~40°	27/30/35/4000K	Ra90	180lm
1035A (LV26RFC)	5W	RF Remote Tunable White	D35*H86	8~40°	2700~5700K	Ra90	170lm

1045A Zoomable 10W











5 years Warranty | Flicker Free | DALI | RF


Light distributions


1045A 10W 4000K Ra90 8D







1045A 10W 4000K Ra90 24D





1045A 10W 4000K Ra90 40D






- For other options or original test report, please contact our sales team.

Model No.	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
1045A (LV26DAB)	10W	DALI Brightness Dim	D45*H114	8~40°	27/30/35/4000K	Ra90	320lm
1045A (LV26DAC)	10W	DALI Tunable White	D45*H114	8~40°	2700~5700K	Ra90	300lm
1045A (LV26RFB)	10W	RF Remote Brightness Dim	D45*H114	8~40°	27/30/35/4000K	Ra90	320lm
1045A (LV26RFC)	10W	RF Remote Tunable White	D45*H114	8~40°	2700~5700K	Ra90	300lm

1055A Zoomable 12W 16W










Zoom 8~50°


5 years Warranty | Flicker Free | DALI | RF

Light distributions


1055A 12W 4000K Ra90 8D

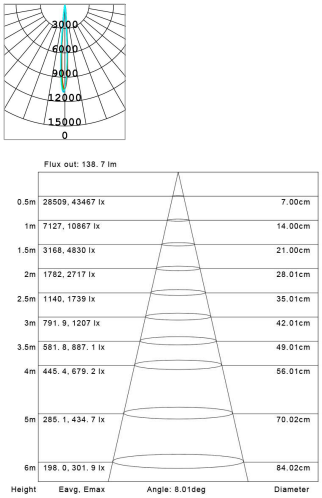


1055A 12W 4000K Ra90 24D

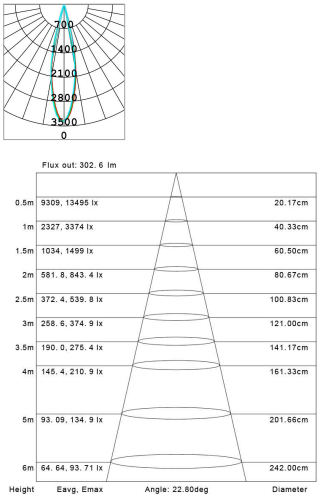

1055A 12W 4000K Ra90 38D

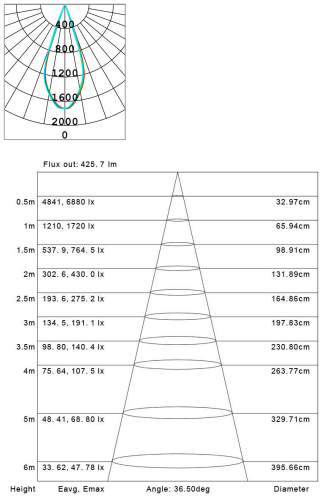

1055A 12W 4000K Ra90 50D

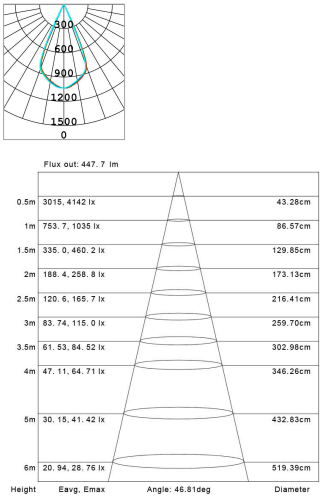

- For other options or original test report, please contact our sales team.

Model No.	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
1055A (LV26DAB12)	12W	DALI Brightness Dim	D55*H142	8~50°	27/30/35/4000K	Ra90	520lm
1055A (LV26DAC12)	12W	DALI Tunable White	D55*H142	8~50°	2700~5700K	Ra90	500lm
1055A (LV26RFB12)	12W	RF Remote Brightness Dim	D55*H142	8~50°	27/30/35/4000K	Ra90	520lm
1055A (LV26RFC12)	12W	RF Remote Tunable White	D55*H142	8~50°	2700~5700K	Ra90	500lm
1055A (LV26DAB16)	16W	DALI Brightness Dim	D55*H142	15~50°	2700/3000/4000K	Ra90	870lm
1055A (LV26DAC16)	16W	DALI Tunable White	D55*H142	15~50°	2700~5700K	Ra90	800lm
1055A (LV26RFB16)	16W	RF Remote Brightness Dim	D55*H142	15~50°	2700/3000/4000K	Ra90	870lm
1055A (LV26RFC16)	16W	RF Remote Tunable White	D55*H142	15~50°	2700~5700K	Ra90	800lm

11 Fixed Light Beam
48V Smart Lighting DALI, Remote Control



15° 24° 36° 50°



4 beam angle lenses are
directly interchangable





30°
Vertical 120°
DALI
RF
2.4G
CASAMBI

1135L Fixed Lens 5W












15° 24° 36° 50°

5 years Warranty | Flicker Free | DALI | RF


Model No.	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
1135L (LV26DAB)	5W	DALI Brightness Dim	D35*H80	15°/24°/36°/50°	27/30/35/4000K	Ra90	400lm
1135L (LV26DAC)	5W	DALI Tunable White	D35*H80	15°/24°/36°/50°	2700~5700K	Ra90	360lm
1135L (LV26RFB)	5W	RF Remote Brightness Dim	D35*H80	15°/24°/36°/50°	27/30/35/4000K	Ra90	400lm
1135L (LV26RFC)	5W	RF Remote Tunable White	D35*H80	15°/24°/36°/50°	2700~5700K	Ra90	360lm

1145L Fixed Lens 10W



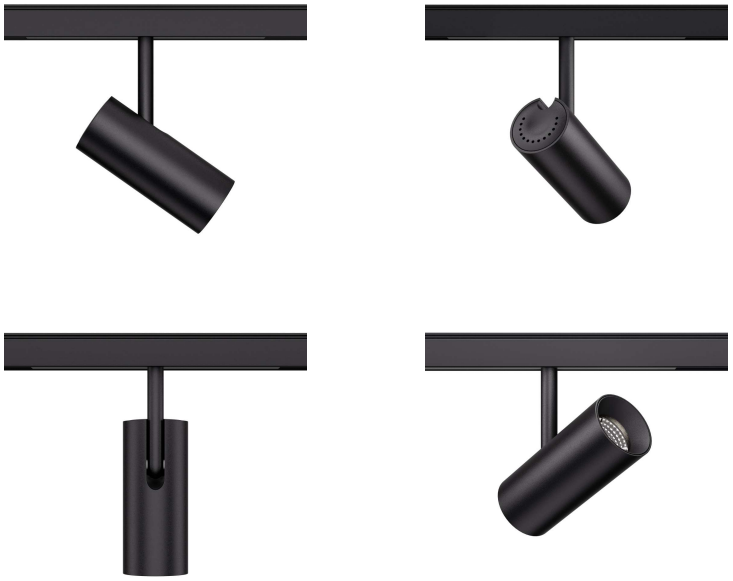









5 years Warranty | Flicker Free | DALI | RF


Light distributions


1145L 10W 4000K Ra90 15D







1145L 10W 4000K Ra90 24D







1145L 10W 4000K Ra90 36D





1145L 10W 4000K Ra90 50D







- For other options or original test report, please contact our sales team.

Model No.	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
1145L (LV26DAB)	10W	DALI Brightness Dim	D45*H105	15°/24°/36°/50°	27/30/35/4000K	Ra90	820lm
1145L (LV26DAC)	10W	DALI Tunable White	D45*H105	15°/24°/36°/50°	2700~5700K	Ra90	730lm
1145L (LV26RFB)	10W	RF Remote Brightness Dim	D45*H105	15°/24°/36°/50°	27/30/35/4000K	Ra90	820lm
1145L (LV26RFC)	10W	RF Remote Tunable White	D45*H105	15°/24°/36°/50°	2700~5700K	Ra90	730lm

1155L Fixed Lens 12W 16W

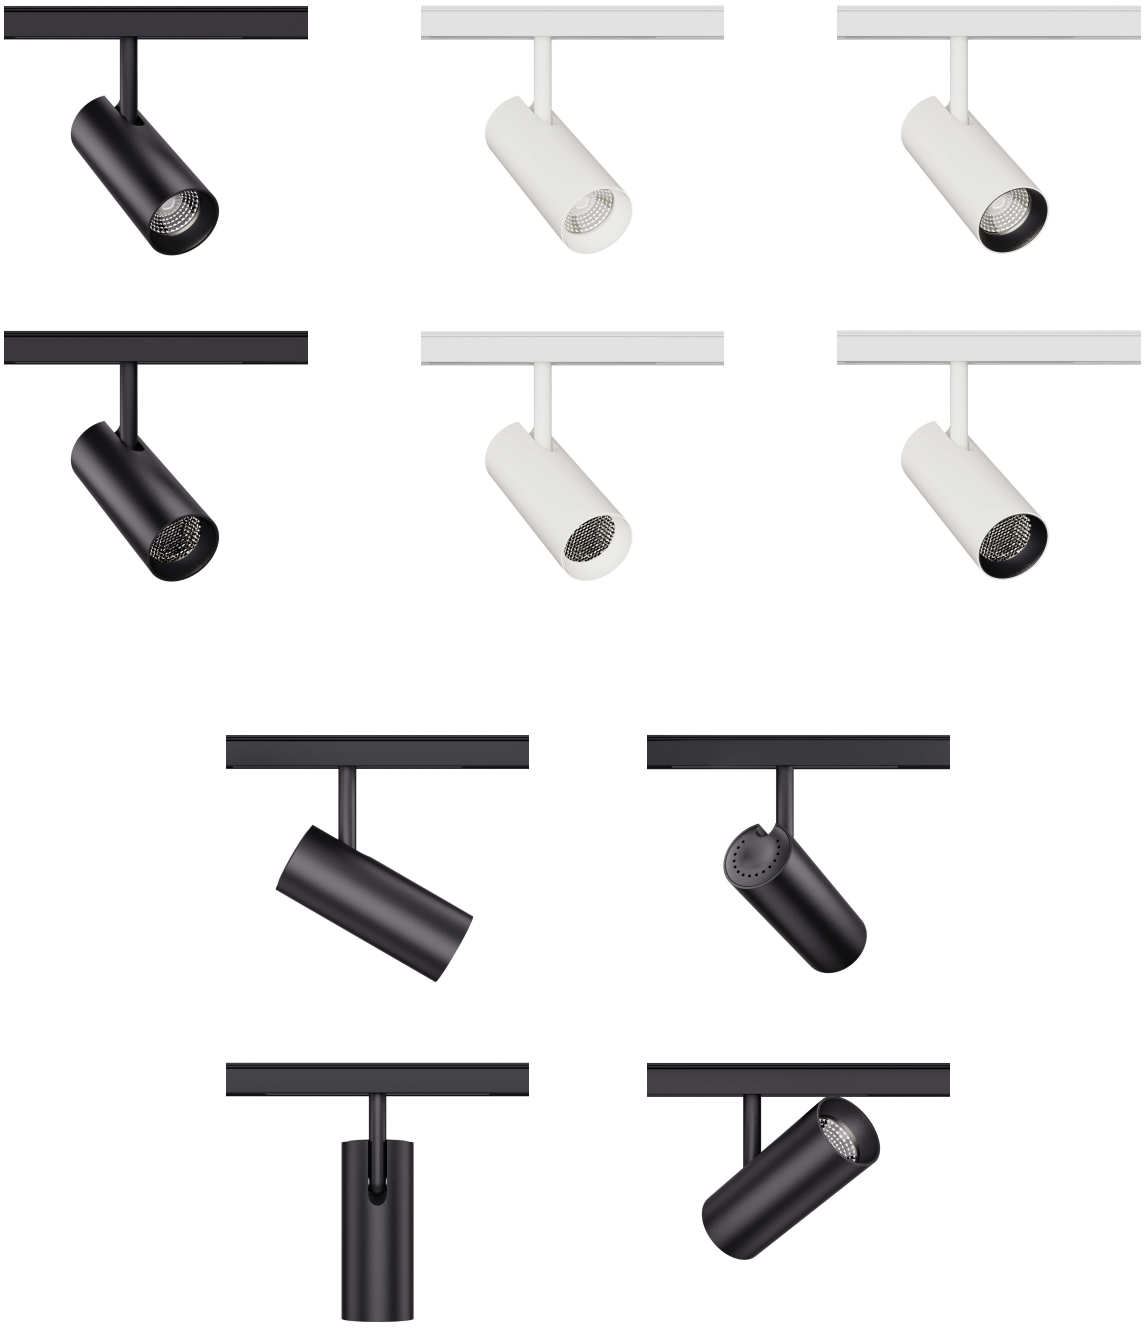



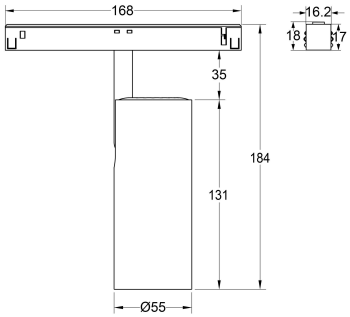





5 years Warranty | Flicker Free | DALI | RF


Light distributions


1155L 12W 4000K Ra90 15D







1155L 12W 4000K Ra90 24D







1155L 12W 4000K Ra90 36D





1155L 12W 4000K Ra90 60D






- For other options or original test report, please contact our sales team.

Model No.	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
1155L (LV26DAB12)	12W	DALI Brightness Dim	D55*H131	15°/24°/36°/60°	27/30/35/4000K	Ra90	1200lm
1155L (LV26DAC12)	12W	DALI Tunable White	D55*H131	15°/24°/36°/60°	2700~5700K	Ra90	1000lm
1155L (LV26RFB12)	12W	RF Remote Brightness Dim	D55*H131	15°/24°/36°/60°	27/30/35/4000K	Ra90	1200lm
1155L (LV26RFC12)	12W	RF Remote Tunable White	D55*H131	15°/24°/36°/60°	2700~5700K	Ra90	1000lm
1155L (LV26DAB16)	16W	DALI Brightness Dim	D55*H131	15°/24°/36°/60°	2700/3000/4000K	Ra90	1600lm
1155L (LV26DAC16)	16W	DALI Tunable White	D55*H131	15°/24°/36°/60°	2700~5700K	Ra90	1300lm
1155L (LV26RFB16)	16W	RF Remote Brightness Dim	D55*H131	15°/24°/36°/60°	2700/3000/4000K	Ra90	1600lm
1155L (LV26RFC16)	16W	RF Remote Tunable White	D55*H131	15°/24°/36°/60°	2700~5700K	Ra90	1300lm


2062A Zoomable 12W 15W





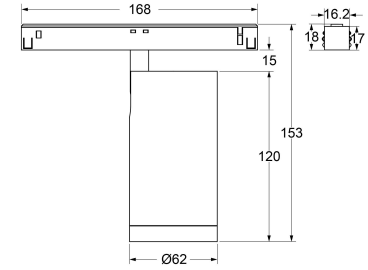

T1

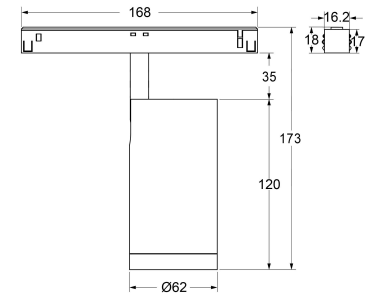


T2


CE | 5 years Warranty | Flicker Free | DALI | RF

Model No.	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
2062A (LV26T1/T2DAB12)	12W	DALI Brightness Dim	D62*H120	11~50°	27/30/35/4000K	Ra90	960lm
2062A (LV26T1/T2DAC12)	12W	DALI Tunable White	D62*H120	11~50°	2700~5700K	Ra90	800lm
2062A (LV26T1/T2RFB12)	12W	RF Remote Brightness Dim	D62*H120	11~50°	27/30/35/4000K	Ra90	960lm
2062A (LV26T1/T2RFC12)	12W	RF Remote Tunable White	D62*H120	11~50°	2700~5700K	Ra90	800lm
2062A (LV26T1/T2DAB15)	15W	DALI Brightness Dim	D62*H120	15~50°	2700/3000/4000K	Ra90	1200lm
2062A (LV26T1/T2DAB15)	15W	DALI Tunable White	D62*H120	15~50°	2700~5700K	Ra90	1000lm
2062A (LV26T1/T2DAB15)	15W	RF Remote Brightness Dim	D62*H120	15~50°	2700/3000/4000K	Ra90	1200lm
2062A (LV26T1/T2DAB15)	15W	RF Remote Tunable White	D62*H120	15~50°	2700~5700K	Ra90	1000lm


2162L Fixed lens 12W

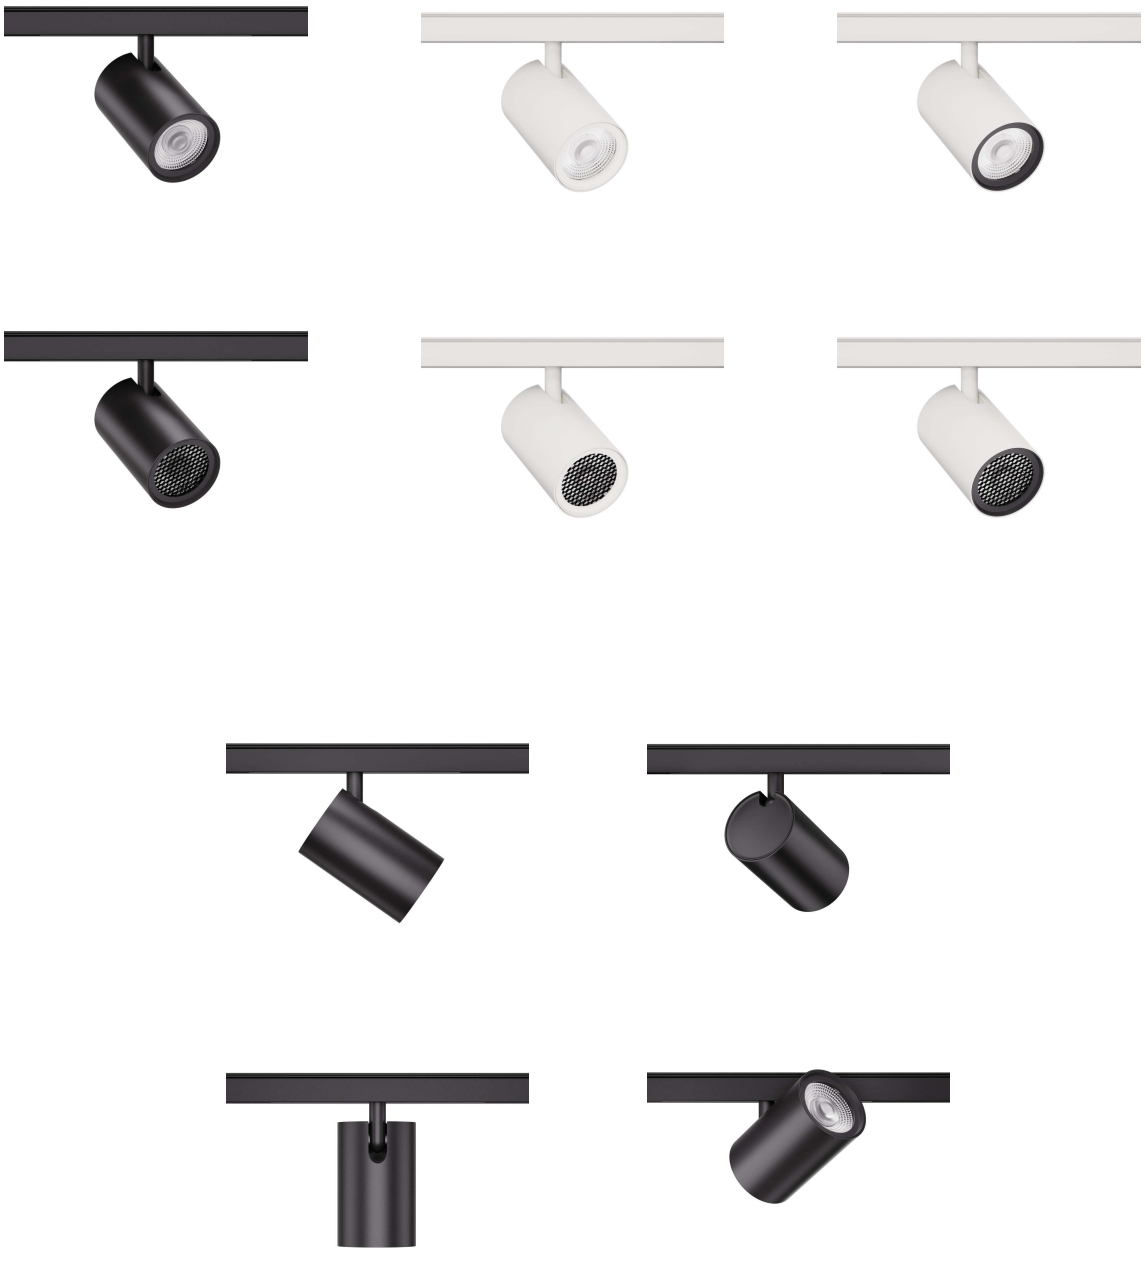



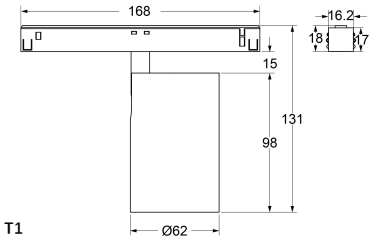

T1

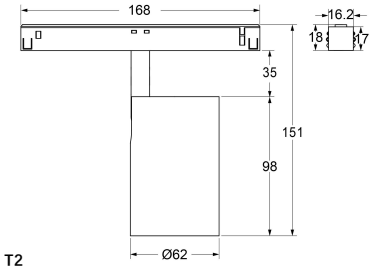

T2



15° 24° 36° 60°

CE | 5 years Warranty | Flicker Free | DALI | RF


Model No.	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
2162L (LV26T1DAB)	12W	DALI Brightness Dim	D62*H98	15°/24°/36°/60°	27/30/35/4000K	Ra90	1200lm
2162L (LV26T1DAC)	12W	DALI Tunable White	D62*H98	15°/24°/36°/60°	2700~5700K	Ra90	1000lm
2162L (LV26T1RFB)	12W	RF Remote Brightness Dim	D62*H98	15°/24°/36°/60°	27/30/35/4000K	Ra90	1200lm
2162L (LV26T1RFC)	12W	RF Remote Tunable White	D62*H98	15°/24°/36°/60°	2700~5700K	Ra90	1000lm
2162L (LV26T2DAB)	12W	DALI Brightness Dim	D62*H98	15°/24°/36°/60°	2700/3000/4000K	Ra90	1200lm
2162L (LV26T2DAC)	12W	DALI Tunable White	D62*H98	15°/24°/36°/60°	2700~5700K	Ra90	1000lm
2162L (LV26T2RFB)	12W	RF Remote Brightness Dim	D62*H98	15°/24°/36°/60°	2700/3000/4000K	Ra90	1200lm
2162L (LV26T2RFC)	12W	RF Remote Tunable White	D62*H98	15°/24°/36°/60°	2700~5700K	Ra90	1000lm

2190L Fixed lens 20W








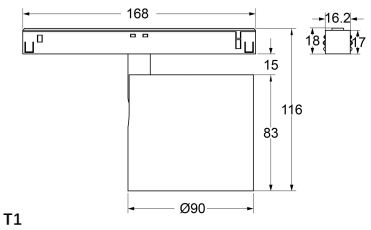

T1

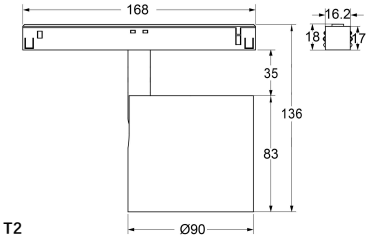

T2



15° 24° 36° 60°

CE | 5 years Warranty | Flicker Free | DALI | RF


Model No.	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
2190L (LV26T1DAB)	20W	DALI Brightness Dim	D90*H83	15°/24°/36°/60°	27/30/35/4000K	Ra90	2000lm
2190L (LV26T1DAC)	20W	DALI Tunable White	D90*H83	15°/24°/36°/60°	2700~5700K	Ra90	1600lm
2190L (LV26T1RFB)	20W	RF Remote Brightness Dim	D90*H83	15°/24°/36°/60°	27/30/35/4000K	Ra90	2000lm
2190L (LV26T1RFC)	20W	RF Remote Tunable White	D90*H83	15°/24°/36°/60°	2700~5700K	Ra90	1600lm
2190L (LV26T2DAB)	20W	DALI Brightness Dim	D90*H83	15°/24°/36°/60°	2700/3000/4000K	Ra90	2000lm
2190L (LV26T2DAC)	20W	DALI Tunable White	D90*H83	15°/24°/36°/60°	2700~5700K	Ra90	1600lm
2190L (LV26T2RFB)	20W	RF Remote Brightness Dim	D90*H83	15°/24°/36°/60°	2700/3000/4000K	Ra90	2000lm
2190L (LV26T2RFC)	20W	RF Remote Tunable White	D90*H83	15°/24°/36°/60°	2700~5700K	Ra90	1600lm

48V Linear Light
48V Smart Lighting DALI, Remote Control

LL22 Linear Light



LS22 Linear Spot

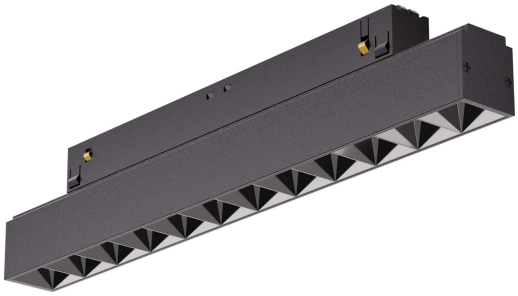

LA22 Adjustable Linear Spot









Linear Light LL22 48V 10W 20W 30W



















10W



20W





30W

CE | 5 years Warranty | Flicker Free | DALI | RF


Light distributions


LL22A 10W 4000K Ra90 90D







LL22A 20W 4000K Ra90 90D





LL22A 30W 4000K Ra90 90D





- For other options or original test report, please contact our sales team.

Model No.	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
ALL-LL22A (LV26DAB)	10W	DALI Brightness Dim	L246*W22*H25.5	90°	27/30/40/50/5700K	Ra90	400lm
ALL-LL22A (LV26RFB)	10W	RF Remote Brightness Dim	L246*W22*H25.5	90°	27/30/40/50/5700K	Ra90	400lm
ALL-LL22B (LV26DAB)	20W	DALI Brightness Dim	L488*W22*H25.5	90°	27/30/40/50/5700K	Ra90	800lm
ALL-LL22B (LV26RFB)	20W	RF Remote Brightness Dim	L488*W22*H25.5	90°	27/30/40/50/5700K	Ra90	800lm
ALL-LL22C (LV26DAB)	30W	DALI Brightness Dim	L730*W22*H25.5	90°	27/30/40/50/5700K	Ra90	1100lm
ALL-LL22C (LV26RFB)	30W	RF Remote Brightness Dim	L730*W22*H25.5	90°	27/30/40/50/5700K	Ra90	1100lm

Linear Spot LS22 48V 10W 20W 30W















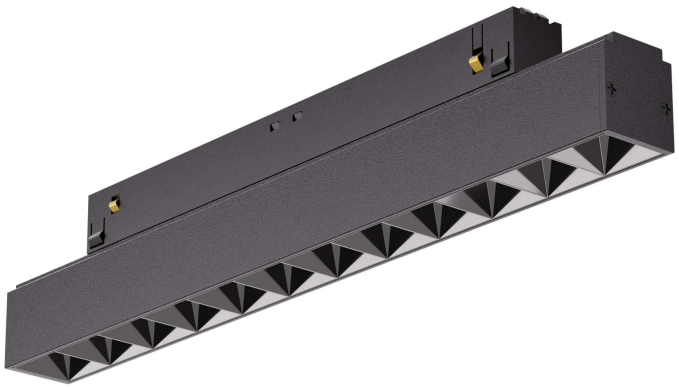




10W



20W





30W

CE | 5 years Warranty | Flicker Free | DALI | RF


Light distributions


LS22A 10W 4000K Ra90 30D







LS22A 20W 4000K Ra90 30D





LS22A 30W 4000K Ra90 30D





- For other options or original test report, please contact our sales team.


Model No.	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
ALL-LS22A (LV26DAB)	10W	DALI Brightness Dim	L231*W22*H25.5	30°	2700/3000/4000K	Ra90	500lm
ALL-LS22A (LV26RFB)	10W	RF Remote Brightness Dim	L231*W22*H25.5	30°	2700/3000/4000K	Ra90	500lm
ALL-LS22B (LV26DAB)	20W	DALI Brightness Dim	L458*W22*H25.5	30°	2700/3000/4000K	Ra90	1000lm
ALL-LS22B (LV26RFB)	20W	RF Remote Brightness Dim	L458*W22*H25.5	30°	2700/3000/4000K	Ra90	1000lm
ALL-LS22C (LV26DAB)	30W	DALI Brightness Dim	L685*W22*H25.5	30°	2700/3000/4000K	Ra90	1400lm
ALL-LS22C (LV26RFB)	30W	RF Remote Brightness Dim	L685*W22*H25.5	30°	2700/3000/4000K	Ra90	1400lm

Adjustable Spot LA22 48V 6W











6LED

5 years Warranty | Flicker Free | DALI | RF


Light distributions


LA22A 6W 4000K Ra90 20D







LA22A 6W 4000K Ra90 32D





LA22A 6W 4000K Ra90 50D





- For other options or original test report, please contact our sales team.


Model No.	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
ALL-LA22A (LV26DAB)	6W	DALI Brightness Dim	L117*W22*H86	20°/32°/50°	2700/3000/4000K	Ra90	500lm
ALL-LA22A (LV26RFB)	6W	RF Remote Brightness Dim	L117*W22*H86	20°/32°/50°	2700/3000/4000K	Ra90	500lm

Adjustable Spot LA22 48V 12W







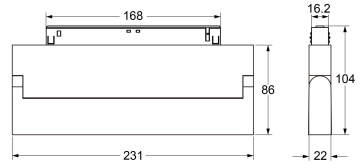



12LED

5 years Warranty | Flicker Free | DALI | RF


Light distributions


LA22B12W 4000K Ra90 20D







LA22B 12W 4000K Ra90 32D





LA22B 12W 4000K Ra90 50D





- For other options or original test report, please contact our sales team.

Model No.	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
ALL-LA22B (LV26DAB)	12W	DALI Brightness Dim	L231*W22*H86	20°/32°/50°	2700/3000/4000K	Ra90	1000lm
ALL-LA22B (LV26RFB)	12W	RF Remote Brightness Dim	L231*W22*H86	20°/32°/50°	2700/3000/4000K	Ra90	1000lm

Tol 01 Series
48V Smart Lighting DALI, Remote Control

ToL01 D30A



ToL01 D40A



ToL01 D40B



ToL01 D50B



ToL01 D55B



ToL01 D40C



ToL01 D90A



ToL01 D100A





Black



Black+Gold ring



Black+ Honeycomb




Black+Gold ring
+Honeycomb



White



White+Black ring



White+Gold ring



White+Honeycomb



White+Black ring
+Honeycomb




White+Gold ring
+Honeycomb

TOL01 D30A 48V 5W






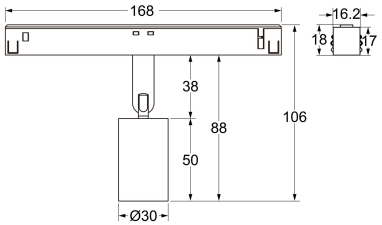


5 years Warranty | Flicker Free | DALI | RF

Light distributions


D30A 5W 4000K Ra90 15D

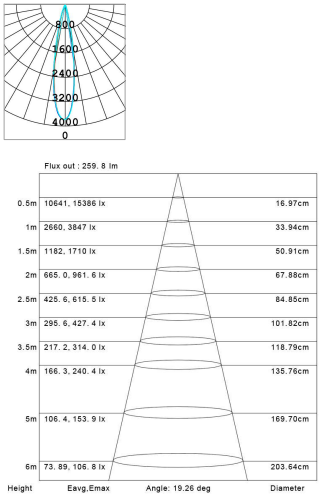


D30A 5W 4000K Ra90 24D

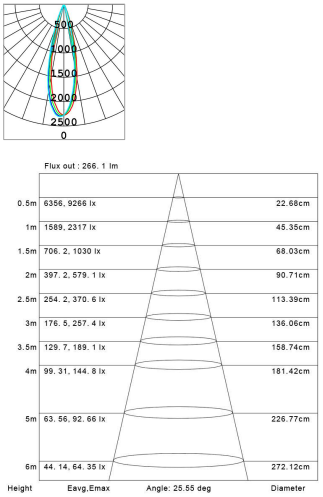

D30A 5W 4000K Ra90 36D

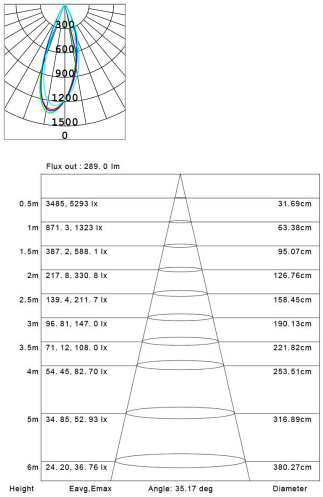


D30A 5W 4000K Ra90 50D

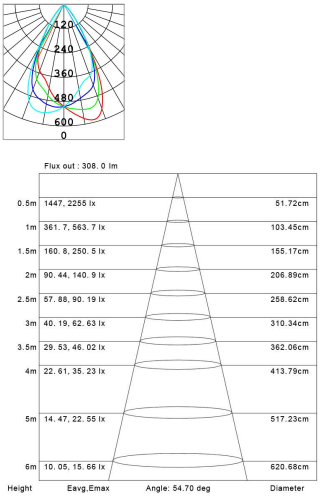


- For other options or original test report, please contact our sales team.


Model No.	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
ALL-ToL0130A (LV26T1DAB)	5W	DALI Brightness Dim	D30*H50	15°/24°/36°/50°	2700/3000/4000K	Ra90	400lm
ALL-ToL0130A (LV26T1DAC)	5W	DALI Tunable White	D30*H50	15°/24°/36°/50°	2700~5700K	Ra90	360lm
ALL-ToL0130A (LV26T1RFB)	5W	RF Remote Brightness Dim	D30*H50	15°/24°/36°/50°	2700/3000/4000K	Ra90	400lm
ALL-ToL0130A (LV26T1RFC)	5W	RF Remote Tunable White	D30*H50	15°/24°/36°/50°	2700~5700K	Ra90	360lm

TOL01 D40A 48V 8W

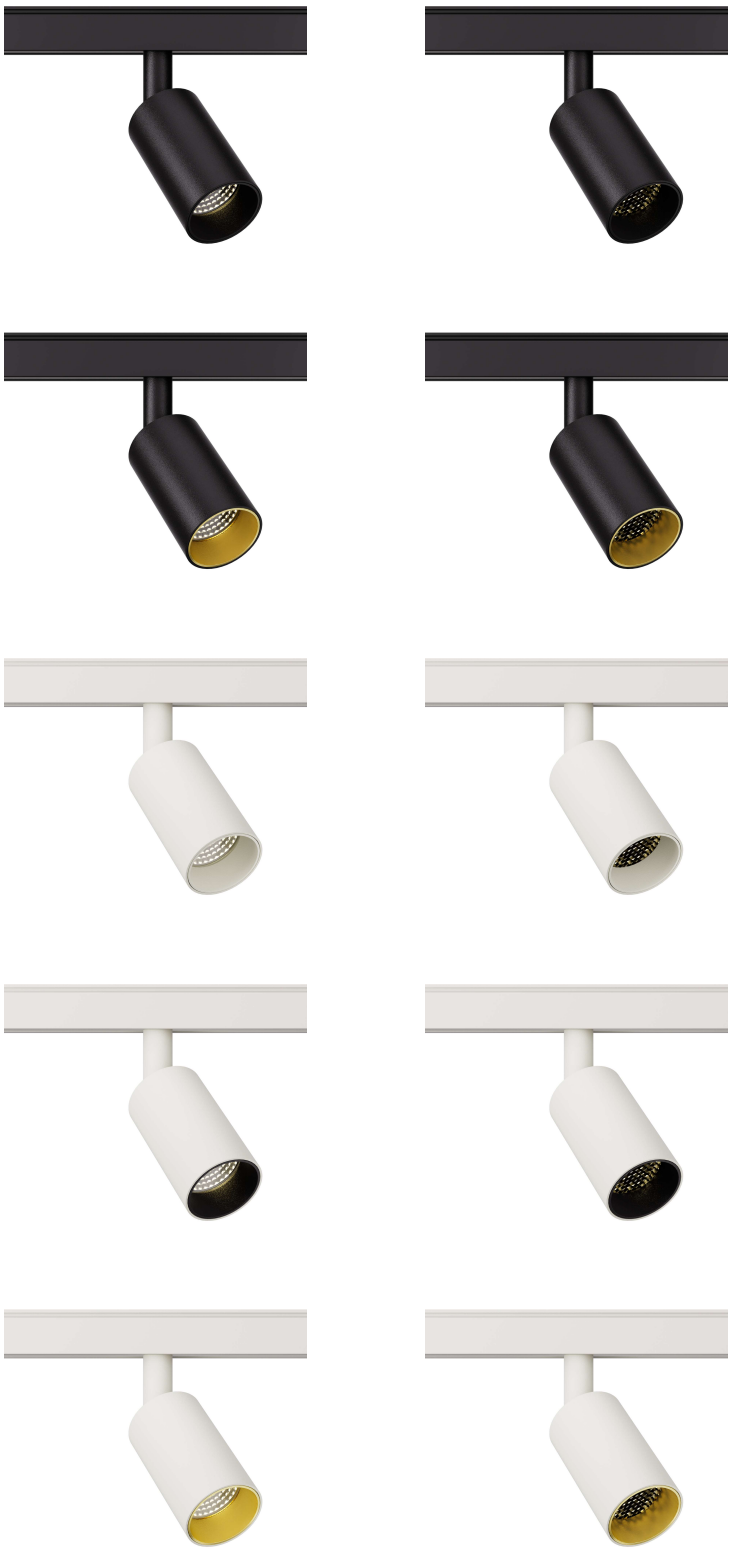



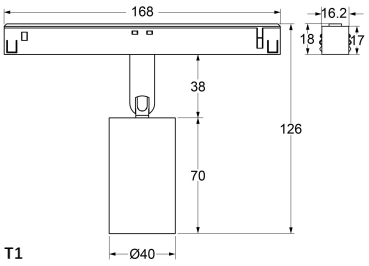


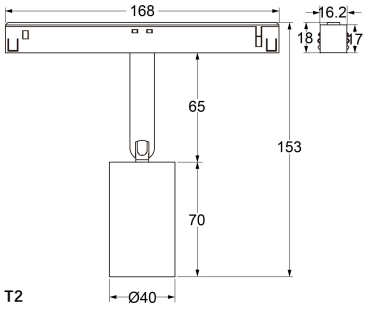


CE | 5 years Warranty | Flicker Free | DALI | RF


Light distributions


D40A 8W 4000K Ra90 15D







D40A 8W 4000K Ra90 24D







D40A 8W 4000K Ra90 36D





D40A 8W 4000K Ra90 50D






- For other options or original test report, please contact our sales team.

Model No.	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
ALL-ToL0140A (LV26T1DAB)	8W	DALI Brightness Dim	D40*H70	15°/24°/36°/50°	2700/3000/4000K	Ra90	630lm
ALL-ToL0140A (LV26T1DAC)	8W	DALI Tunable White	D40*H70	15°/24°/36°/50°	2700~5700K	Ra90	560lm
ALL-ToL0140A (LV26T1RFB)	8W	RF Remote Brightness Dim	D40*H70	15°/24°/36°/50°	2700/3000/4000K	Ra90	630lm
ALL-ToL0140A (LV26T1RFC)	8W	RF Remote Tunable White	D40*H70	15°/24°/36°/50°	2700~5700K	Ra90	560lm
ALL-ToL0140A (LV26T2DAB)	8W	DALI Brightness Dim	D40*H70	15°/24°/36°/50°	2700/3000/4000K	Ra90	630lm
ALL-ToL0140A (LV26T2DAC)	8W	DALI Tunable White	D40*H70	15°/24°/36°/50°	2700~5700K	Ra90	560lm
ALL-ToL0140A (LV26T2RFB)	8W	RF Remote Brightness Dim	D40*H70	15°/24°/36°/50°	2700/3000/4000K	Ra90	630lm
ALL-ToL0140A (LV26T2RFC)	8W	RF Remote Tunable White	D40*H70	15°/24°/36°/50°	2700~5700K	Ra90	560lm


TOL01 D40B 48V 10W





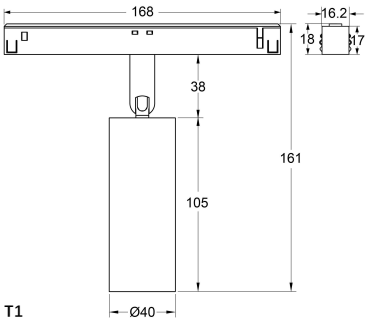

T1

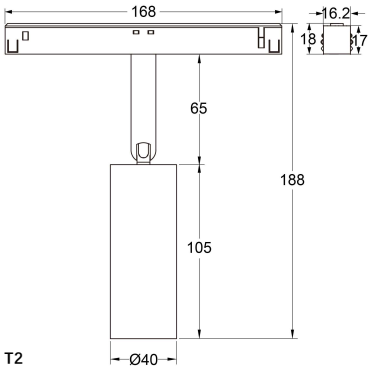



T2

CE | 5 years Warranty | Flicker Free | DALI | RF


Light distributions


D40B 10W 4000K Ra90 15D







D40B 10W 4000K Ra90 24D







D40B 10W 4000K Ra90 36D





D40B 10W 4000K Ra90 50D







- For other options or original test report, please contact our sales team.

Model No.	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
ALL-ToL0140B (LV26T1DAB)	10W	DALI Brightness Dim	D40*H105	15°/24°/36°/50°	2700/3000/4000K	Ra90	780lm
ALL-ToL0140B (LV26T1DAC)	10W	DALI Tunable White	D40*H105	15°/24°/36°/50°	2700~5700K	Ra90	700lm
ALL-ToL0140B (LV26T1RFB)	10W	RF Remote Brightness Dim	D40*H105	15°/24°/36°/50°	2700/3000/4000K	Ra90	780lm
ALL-ToL0140B (LV26T1RFC)	10W	RF Remote Tunable White	D40*H105	15°/24°/36°/50°	2700~5700K	Ra90	700lm
ALL-ToL0140B (LV26T2DAB)	10W	DALI Brightness Dim	D40*H105	15°/24°/36°/50°	2700/3000/4000K	Ra90	780lm
ALL-ToL0140B (LV26T2DAC)	10W	DALI Tunable White	D40*H105	15°/24°/36°/50°	2700~5700K	Ra90	700lm
ALL-ToL0140B (LV26T2RFB)	10W	RF Remote Brightness Dim	D40*H105	15°/24°/36°/50°	2700/3000/4000K	Ra90	780lm
ALL-ToL0140B (LV26T2RFC)	10W	RF Remote Tunable White	D40*H105	15°/24°/36°/50°	2700~5700K	Ra90	700lm


TOL01 D50B 48V 12W

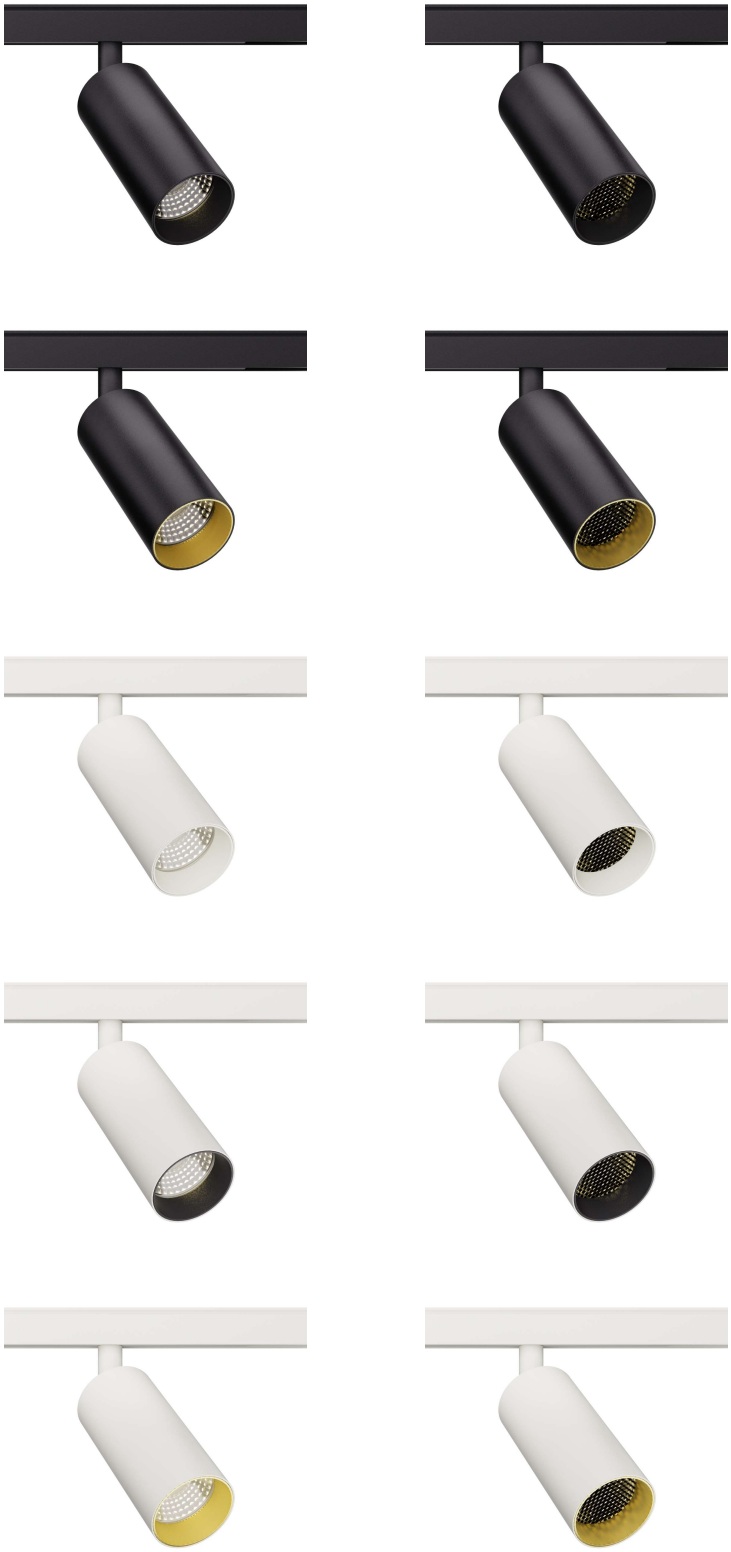



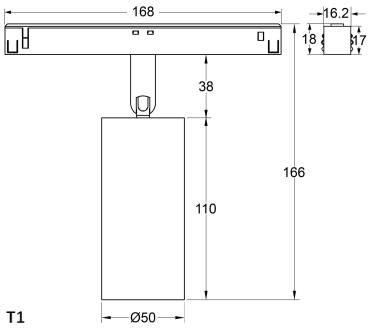

T1

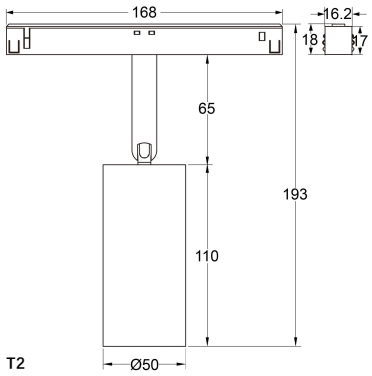



T2

5 years Warranty | Flicker Free | DALI | RF


Light distributions


D50B 12W 4000K Ra90 15D







D50B 12W 4000K Ra90 24D







D50B 12W 4000K Ra90 36D





D50B 12W 4000K Ra90 50D







- For other options or original test report, please contact our sales team.

Model No.	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
ALL-ToL0150B (LV26T1DAB)	12W	DALI Brightness Dim	D50*H110	15°/24°/36°/50°	2700/3000/4000K	Ra90	1000lm
ALL-ToL0150B (LV26T1DAC)	12W	DALI Tunable White	D50*H110	15°/24°/36°/50°	2700~5700K	Ra90	850lm
ALL-ToL0150B (LV26T1RFB)	12W	RF Remote Brightness Dim	D50*H110	15°/24°/36°/50°	2700/3000/4000K	Ra90	1000lm
ALL-ToL0150B (LV26T1RFC)	12W	RF Remote Tunable White	D50*H110	15°/24°/36°/50°	2700~5700K	Ra90	850lm
ALL-ToL0150B (LV26T2DAB)	12W	DALI Brightness Dim	D50*H110	15°/24°/36°/50°	2700/3000/4000K	Ra90	1000lm
ALL-ToL0150B (LV26T2DAC)	12W	DALI Tunable White	D50*H110	15°/24°/36°/50°	2700~5700K	Ra90	850lm
ALL-ToL0150B (LV26T2RFB)	12W	RF Remote Brightness Dim	D50*H110	15°/24°/36°/50°	2700/3000/4000K	Ra90	1000lm
ALL-ToL0150B (LV26T2RFC)	12W	RF Remote Tunable White	D50*H110	15°/24°/36°/50°	2700~5700K	Ra90	850lm


TOL01 D55B 48V 15W

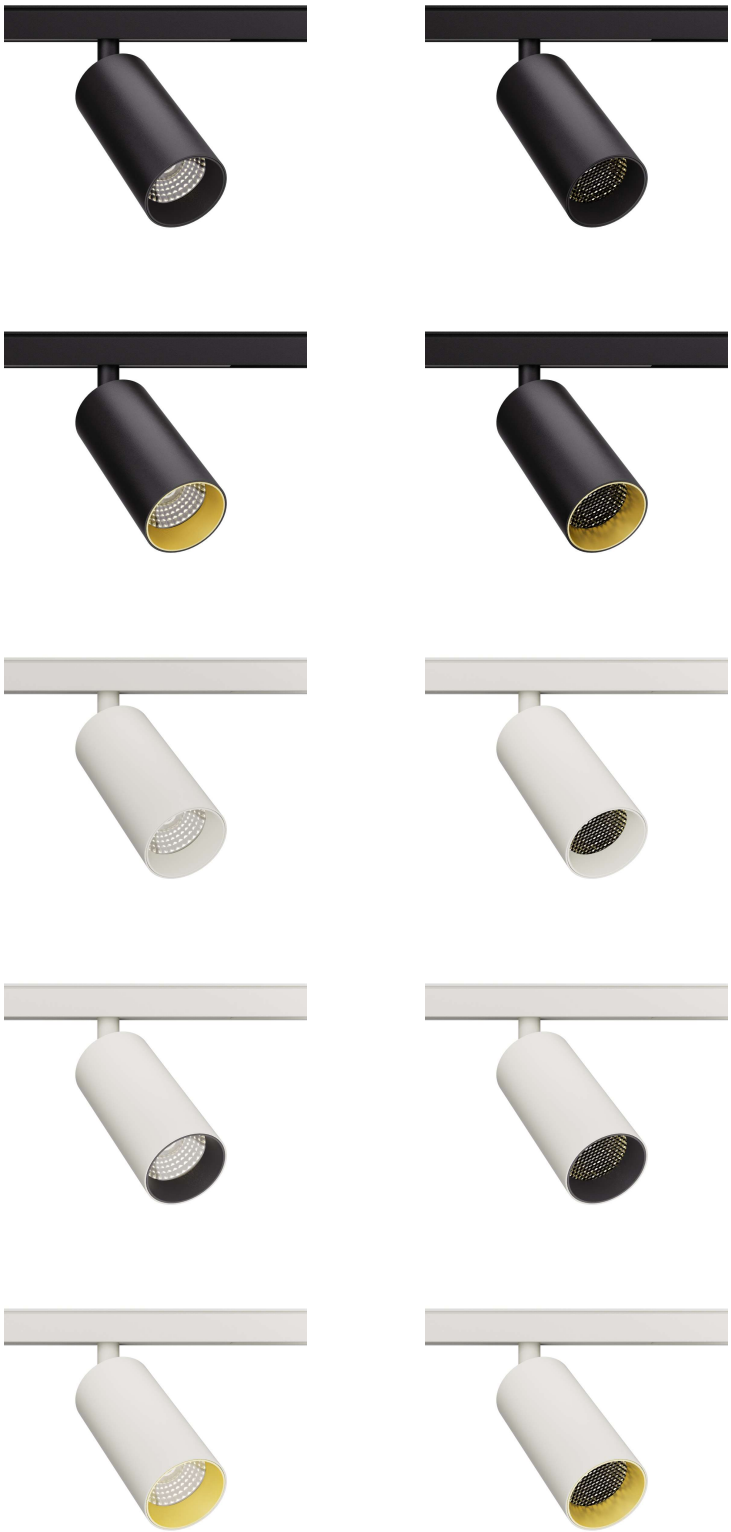



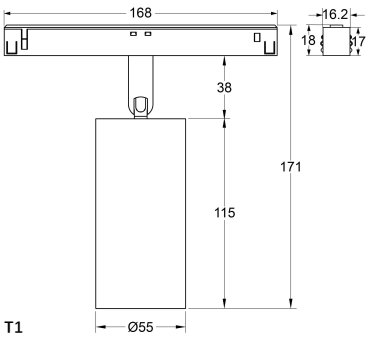

T1

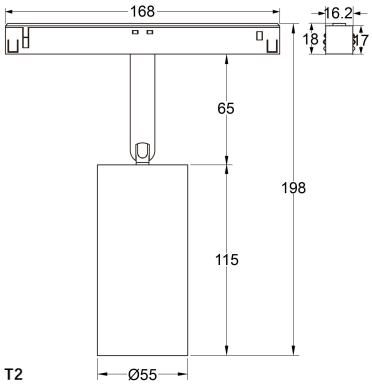



T2

5 years Warranty | Flicker Free | DALI | RF


Light distributions


D55B 15W 4000K Ra90 15D







D55B 15W 4000K Ra90 24D







D55B 15W 4000K Ra90 36D





D55B 15W 4000K Ra90 50D





- For other options or original test report, please contact our sales team.

Model No.	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
ALL-ToL0155B (LV26T1DAB)	15W	DALI Brightness Dim	D55*H115	15°/24°/36°/50°	2700/3000/4000K	Ra90	1200lm
ALL-ToL0155B (LV26T1DAC)	15W	DALI Tunable White	D55*H115	15°/24°/36°/50°	2700~5700K	Ra90	1050lm
ALL-ToL0155B (LV26T1RFB)	15W	RF Remote Brightness Dim	D55*H115	15°/24°/36°/50°	2700/3000/4000K	Ra90	1200lm
ALL-ToL0155B (LV26T1RFC)	15W	RF Remote Tunable White	D55*H115	15°/24°/36°/50°	2700~5700K	Ra90	1050lm
ALL-ToL0155B (LV26T2DAB)	15W	DALI Brightness Dim	D55*H115	15°/24°/36°/50°	2700/3000/4000K	Ra90	1200lm
ALL-ToL0155B (LV26T2DAC)	15W	DALI Tunable White	D55*H115	15°/24°/36°/50°	2700~5700K	Ra90	1050lm
ALL-ToL0155B (LV26T2RFB)	15W	RF Remote Brightness Dim	D55*H115	15°/24°/36°/50°	2700/3000/4000K	Ra90	1200lm
ALL-ToL0155B (LV26T2RFC)	15W	RF Remote Tunable White	D55*H115	15°/24°/36°/50°	2700~5700K	Ra90	1050lm

TOL01 D40C 48V 10W















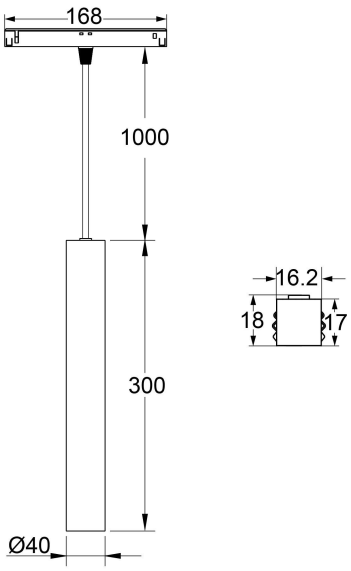


5 years Warranty | Flicker Free | DALI | RF


Light distributions


D40C 10W 4000K Ra90 15D







D40C 10W 4000K Ra90 24D







D40C 10W 4000K Ra90 36D





D40C 10W 4000K Ra90 50D






- For other options or original test report, please contact our sales team.

Model No.	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
ALL-ToL0140C (LV26DAB)	10W	DALI Brightness Dim	D40*H300	15°/24°/36°/50°	2700/3000/4000K	Ra90	780lm
ALL-ToL0140C (LV26DAC)	10W	DALI Tunable White	D40*H300	15°/24°/36°/50°	2700~5700K	Ra90	700lm
ALL-ToL0140C (LV26RFB)	10W	RF Remote Brightness Dim	D40*H300	15°/24°/36°/50°	2700/3000/4000K	Ra90	780lm
ALL-ToL0140C (LV26RFC)	10W	RF Remote Tunable White	D40*H300	15°/24°/36°/50°	2700~5700K	Ra90	700lm

TOL01 D90A 48V 20W






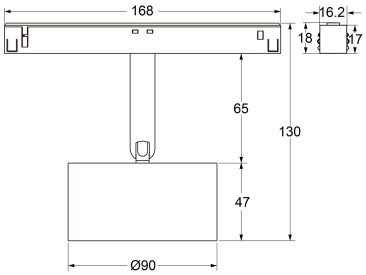


5 years Warranty | Flicker Free | DALI | RF


Light distributions


D90A 20W 4000K Ra90 15D







D90A 20W 4000K Ra90 20D







D90A 20W 4000K Ra90 36D





D90A 20W 4000K Ra90 60D






- For other options or original test report, please contact our sales team.

Model No.	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
ALL-ToL0190A (LV26T2DAB)	20W	DALI Brightness Dim	D90*H47	15°/20°/36°/60°	2700/3000/4000K	Ra90	1800lm
ALL-ToL0190A (LV26T2DAC)	20W	DALI Tunable White	D90*H47	15°/20°/36°/60°	2700~5700K	Ra90	1600lm
ALL-ToL0190A (LV26T2RFB)	20W	RF Remote Brightness Dim	D90*H47	15°/20°/36°/60°	2700/3000/4000K	Ra90	1800lm
ALL-ToL0190A (LV26T2RFC)	20W	RF Remote Tunable White	D90*H47	15°/20°/36°/60°	2700~5700K	Ra90	1600lm

TOL01 D100A 48V 6W






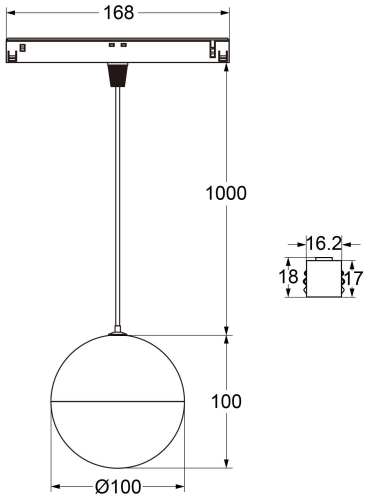


5 years Warranty | Flicker Free | DALI | RF

Light distributions

D100A 6W 4000K Ra90 150D





- For other options or original test report, please contact our sales team.

Model No.	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
ALL-ToL01100A (LV26DAB)	6W	DALI Brightness Dim	D100	150°	27/30/40/50/5700K	Ra90	500lm
ALL-ToL01100A (LV26RFB)	6W	RF Remote Brightness Dim	D100	150°	27/30/40/50/5700K	Ra90	500lm

Control System
DALI Systerm Control Gear


Picture	Modle No.	Features	Description
	ERI D101A	**DALI Dimmer+Bus Power** Built-in 100mA DALI bus power. Tunable White+ Brightness Dimming	DALI Dimmer+Bus Power - built-in 100mA DALI bus power under AC mains. - on/off, brightness dimmable and tunable white control. - standard size design. - can be powered by DALI bus while not connected with AC mains.
	ERI D102A	**DALI Keypad A** Tunable White+ Brightness Dimming	DALI Keypad A - 8 keys, power supplied by DALI bus. - on/off, brightness dimmable and tunable white control. - can set 2 scenes, standard size, easy installation.
	ERI D103A	**DALI Keypad B** Tunable White+ Brightness Dimming	DALI Keypad B - 8 keys, power supplied by DALI bus. - on/off, brightness dimmable and tunable white control. - can set 2 scenes, standard size, easy installation.
	ERI D101B	**DALI Dimmer+Bus Power** Brightness Dimming Only	DALI Dimmer+Bus Power - built-in 100mA DALI bus power under AC mains. - on/off, brightness dimmable only - standard size design. - can be powered by DALI bus while not connected with AC mains.
	ERI D102B	**DALI Keypad A** Brightness Dimming Only	DALI Keypad A - 8 keys, power supplied by DALI bus. - on/off, brightness dimmable only. - can set 4 scenes, standard size, easy installation.
	ERI D103B	**DALI Keypad B** Brightness Dimming Only	DALI Keypad B - 8 keys, power supplied by DALI bus. - on/off, brightness dimmable only. - can set 4 scenes, standard size, easy installation.
	ERI D105	**DALI Bus Power Supply**	DALI Bus Power Supply - max. output current 250mA for DALI bus. - DIN RAIL installation.
	ERI D106	**DALI Phase Dimmer**	DALI Phase Dimmer - AC-AC, 4 channels output, Triac dimmable and mosfet dimmable, Forward-phase and reverse-phase, Minimum brightness setting, DIN RAIL installation.
	ERI D108	**DALI Relay Module+ DALI to 0/1-10V Converter**	DALI Relay Module + DALI to 0/1-10V Converter -Powered by DALI bus, Capacitive/Resistive loads, DALI bus consumption: 3mA -Max. load AC200-240V LED 300W / incandescent and halogen 1000W. -Output 0/1-10V current 10mA for 0/1-10V LED driver 1mA/piece, Max capacity 10pcs.
	ERI D109	**DALI+ Push AC Phase Cut Dimmer 200W**	DALI+Push AC Phase Cut Dimmer 200W -AC100-240VAC, DALI consumption 2 mA -Compatible Load Types Triac Dimmable LED lamps 220-240V 200W
	ERI D110A	**4 Group DT8 DALI CCT Dual Color Touch Controller**	4 Group DT8 DALI CCT Dual Color Touch Controller -Built-in 100mA DALI bus power under AC mains -Powered by DALI bus while not connected to AC mains. -DALI consumption 4 mA
	ERI D110B	**4 Group DT6 DALI DIM Single Color Touch Controller**	4 Group DT6 DALI DIM Single Color Touch Controller -Built-in 100mA DALI bus power under AC mains -Powered by DALI bus while not connected to AC mains. -DALI consumption 4 mA
	ERI D111	**Mini DALI Power Supply 100mA**	Mini DALI Power Supply 100mA -AC100-240VAC, Mini DALI power supply, max. 100mA output -Match all DALI system in the market -Mini size, easy installation into existing wall boxes

Remote Control RF 2.4G Wireless


Picture	Modle No.	Description
	ERI J101	Model: ERI J101 Control: 1 Zone Tunable White+ Brightness Dimming, 0.1%~100% smooth dimming Working voltage: 3VDC by CR2032 battery Connection: RF 2.4G Wierless, 30m remote distance from controller to LED light, LED lights quantity no limits
	ERI J102-1	Model: ERI J102-1 Control: 4 Zone Tunable White+ Brightness Dimming, 0.1%~100% smooth dimming Working voltage: 3VDC by 2 pcs AAA battery Connection: RF 2.4G Wierless, 30m remote distance from controller to LED light, LED lights quantity no limits
	ERI J102-2	Model: ERI J102-2 Control: 4 Zone Tunable White+ Brightness Dimming, 0.1%~100% smooth dimming Working voltage: 100-240VAC input Connection: RF 2.4G Wierless, 30m remote distance from controller to LED light, LED lights quantity no limits
	ERI J102-3	Model: ERI J102-3 Control: 4 Zone Brightness Dimming, 0.1%~100% smooth dimming Working voltage: 3VDC by 2 pcs AAA battery Connection: RF 2.4G Wierless, 30m remote distance from controller to LED light, LED lights quantity no limits
	ERI J102-4	Model: ERI J102-3 Control: 4 Zone Brightness Dimming, 0.1%~100% smooth dimming Working voltage: 100-240VAC input Connection: RF 2.4G Wierless, 30m remote distance from controller to LED light, LED lights quantity no limits
	ERI J103-1	Model: ERI J103-1 Control: 1 Tunable White+ Brightness Dimming, 0.1%~100% smooth dimming Working voltage: 3VDC by 2 pcs AAA battery Connection: RF 2.4G Wierless, 30m remote distance from controller to LED light, LED lights quantity no limits
	ERI J103-2	Model: ERI J103-2 Control: 4 Zone Tunable White+ Brightness Dimming, 0.1%~100% smooth dimming Working voltage: 3VDC by 2 pcs AAA battery Connection: RF 2.4G Wierless, 30m remote distance from controller to LED light, LED lights quantity no limits
	ERI J103-3	Model: ERI J103-4 Control: 1 Zone Brightness Dimming, 0.1%~100% smooth dimming Working voltage: 3VDC by 2 pcs AAA battery Connection: RF 2.4G Wierless, 30m remote distance from controller to LED light, LED lights quantity no limits
	ERI J103-4	Model: ERI J103-4 Control: 4 Zone Brightness Dimming, 0.1%~100% smooth dimming Working voltage: 3VDC by 2 pcs AAA battery Connection: RF 2.4G Wierless, 30m remote distance from controller to LED light, LED lights quantity no limits
	ERI J103-5	Model: ERI J103-4 Control: 8 Zone Brightness Dimming, 0.1%~100% smooth dimming Working voltage: 3VDC by 2 pcs AAA battery Connection: RF 2.4G Wierless, 30m remote distance from controller to LED light, LED lights quantity no limits
	ERI J104	Model: ERI J103-4 Control: 8 Zone Tunable White, Brightness Dimming, RGB, RGBW or RGB+CCT RF LED controller Working voltage: 3VDC by 2 pcs AAA battery Connection: RF 2.4G Wierless, 30m remote distance from controller to LED light, LED lights quantity no limits


DALI Control, Wired Connection

An Example Of A DALI Lighting-control System

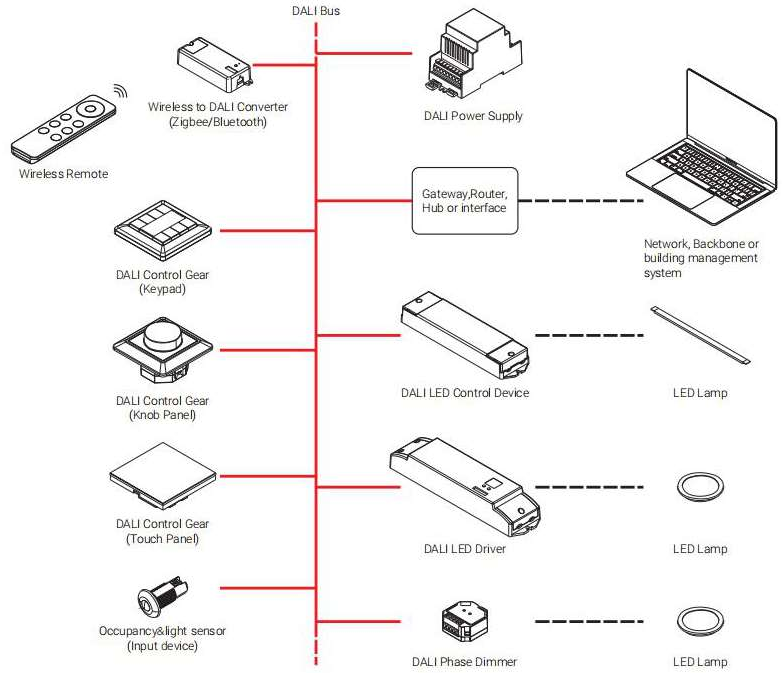

Easy Connecting Ways Of DALI Smart Lighting

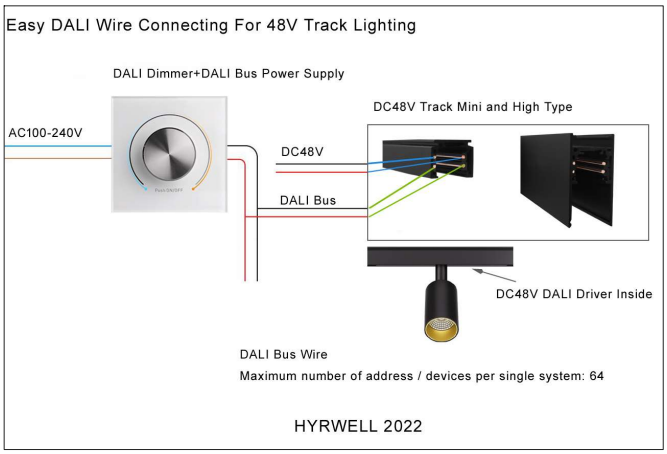

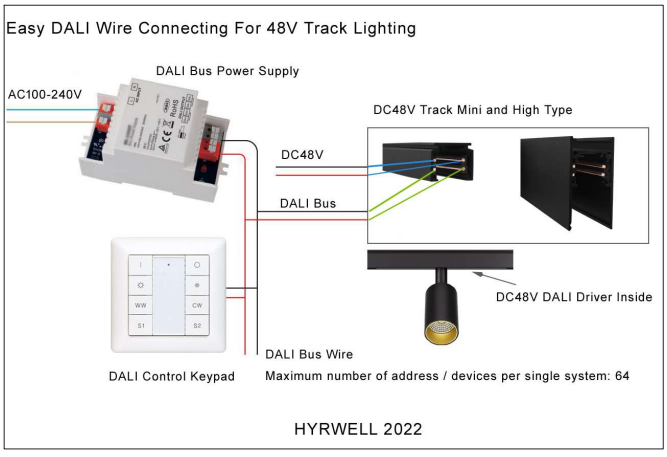


Basic Parameters Of DALI Protocol

Basic Parameters of DALI Protocol

DALI Signal Voltage	High Voltage : 9.5-22.5 V Low Voltage : -6.5 – (+)6.5 V
System Current	Max : 250mA
Data Transmission Speed	1200 bps
Maximum Cable Length	300 m, Related to wire diameter
Cable Type	1.5 mm2, Related to wire diameter
Maximum number of address / devices per single system	64
Maximum number of lighting scenes per single system	16
Maximum number of groups per single system	16

RF Remote Control, Wireless


Why RF Remote Control?

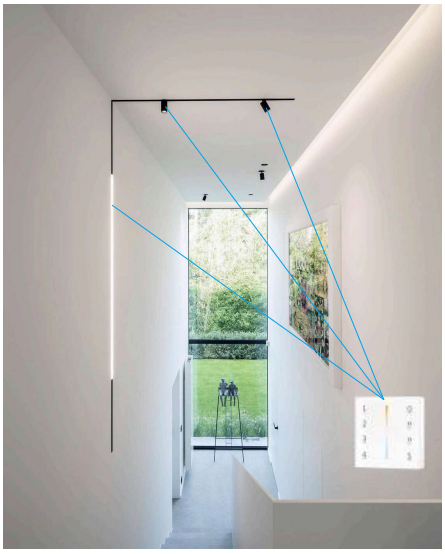

● RF remote control solution is easy for smart lighting, remote controller connect each lights directly by RF 2.4G wireless signal, no wiring required.

● RF remote control solution is more cost effective than DALI or CASAMBI for smart lighting. The controllers and lights cost less, more acceptable price for customers.

● Easy to use, no need professionals to set up, control a luminaire to turn it on or off, adjust brightness, colour temperature, or control all lights by several groups and save lighting scenes.

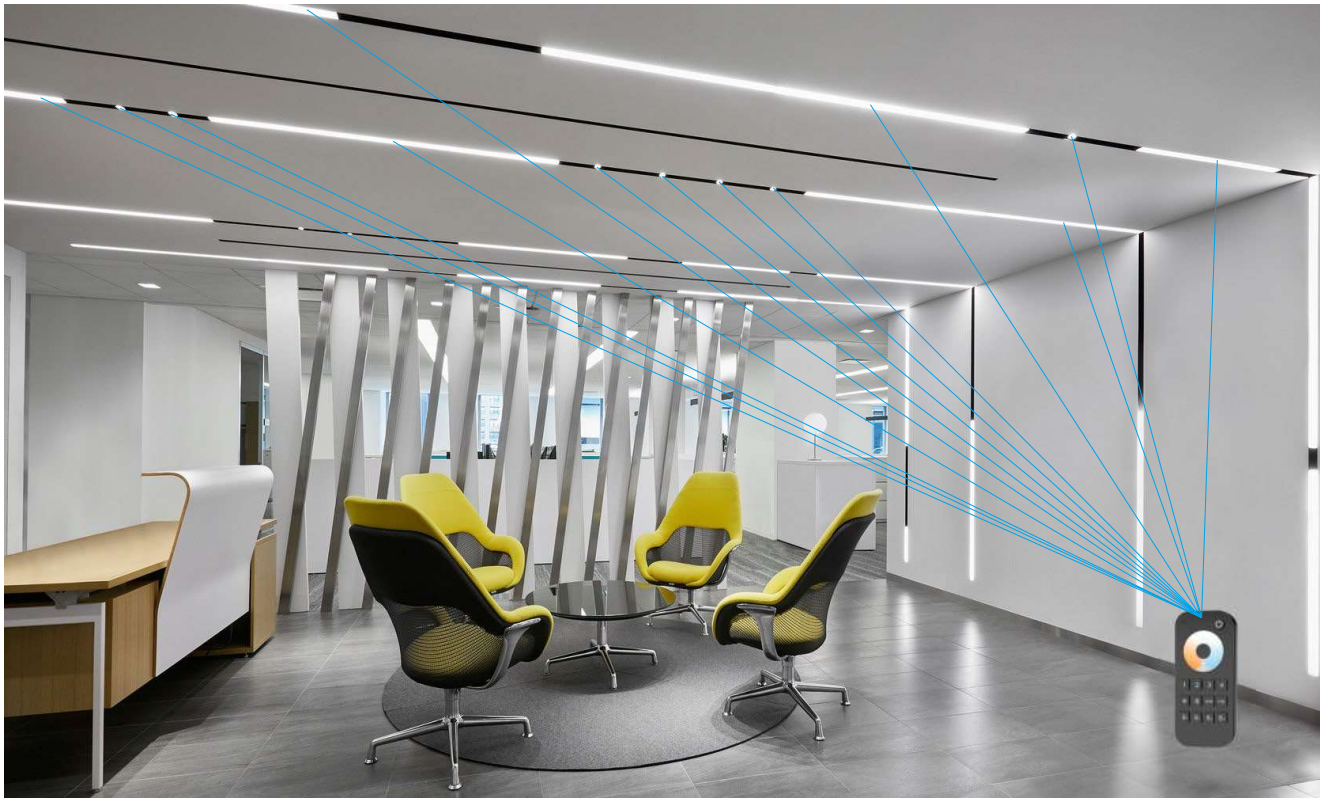



Allure Verlichting

Allure Verlichting
Address: Handelsweg 6
Postcode: 7641AC Wierden
Tel.: 0031 (0) 546 579 005

Email: info@allureverlichting.nl
Web: www.allureverlichting.nl

Version 04/2023