

Allure Design







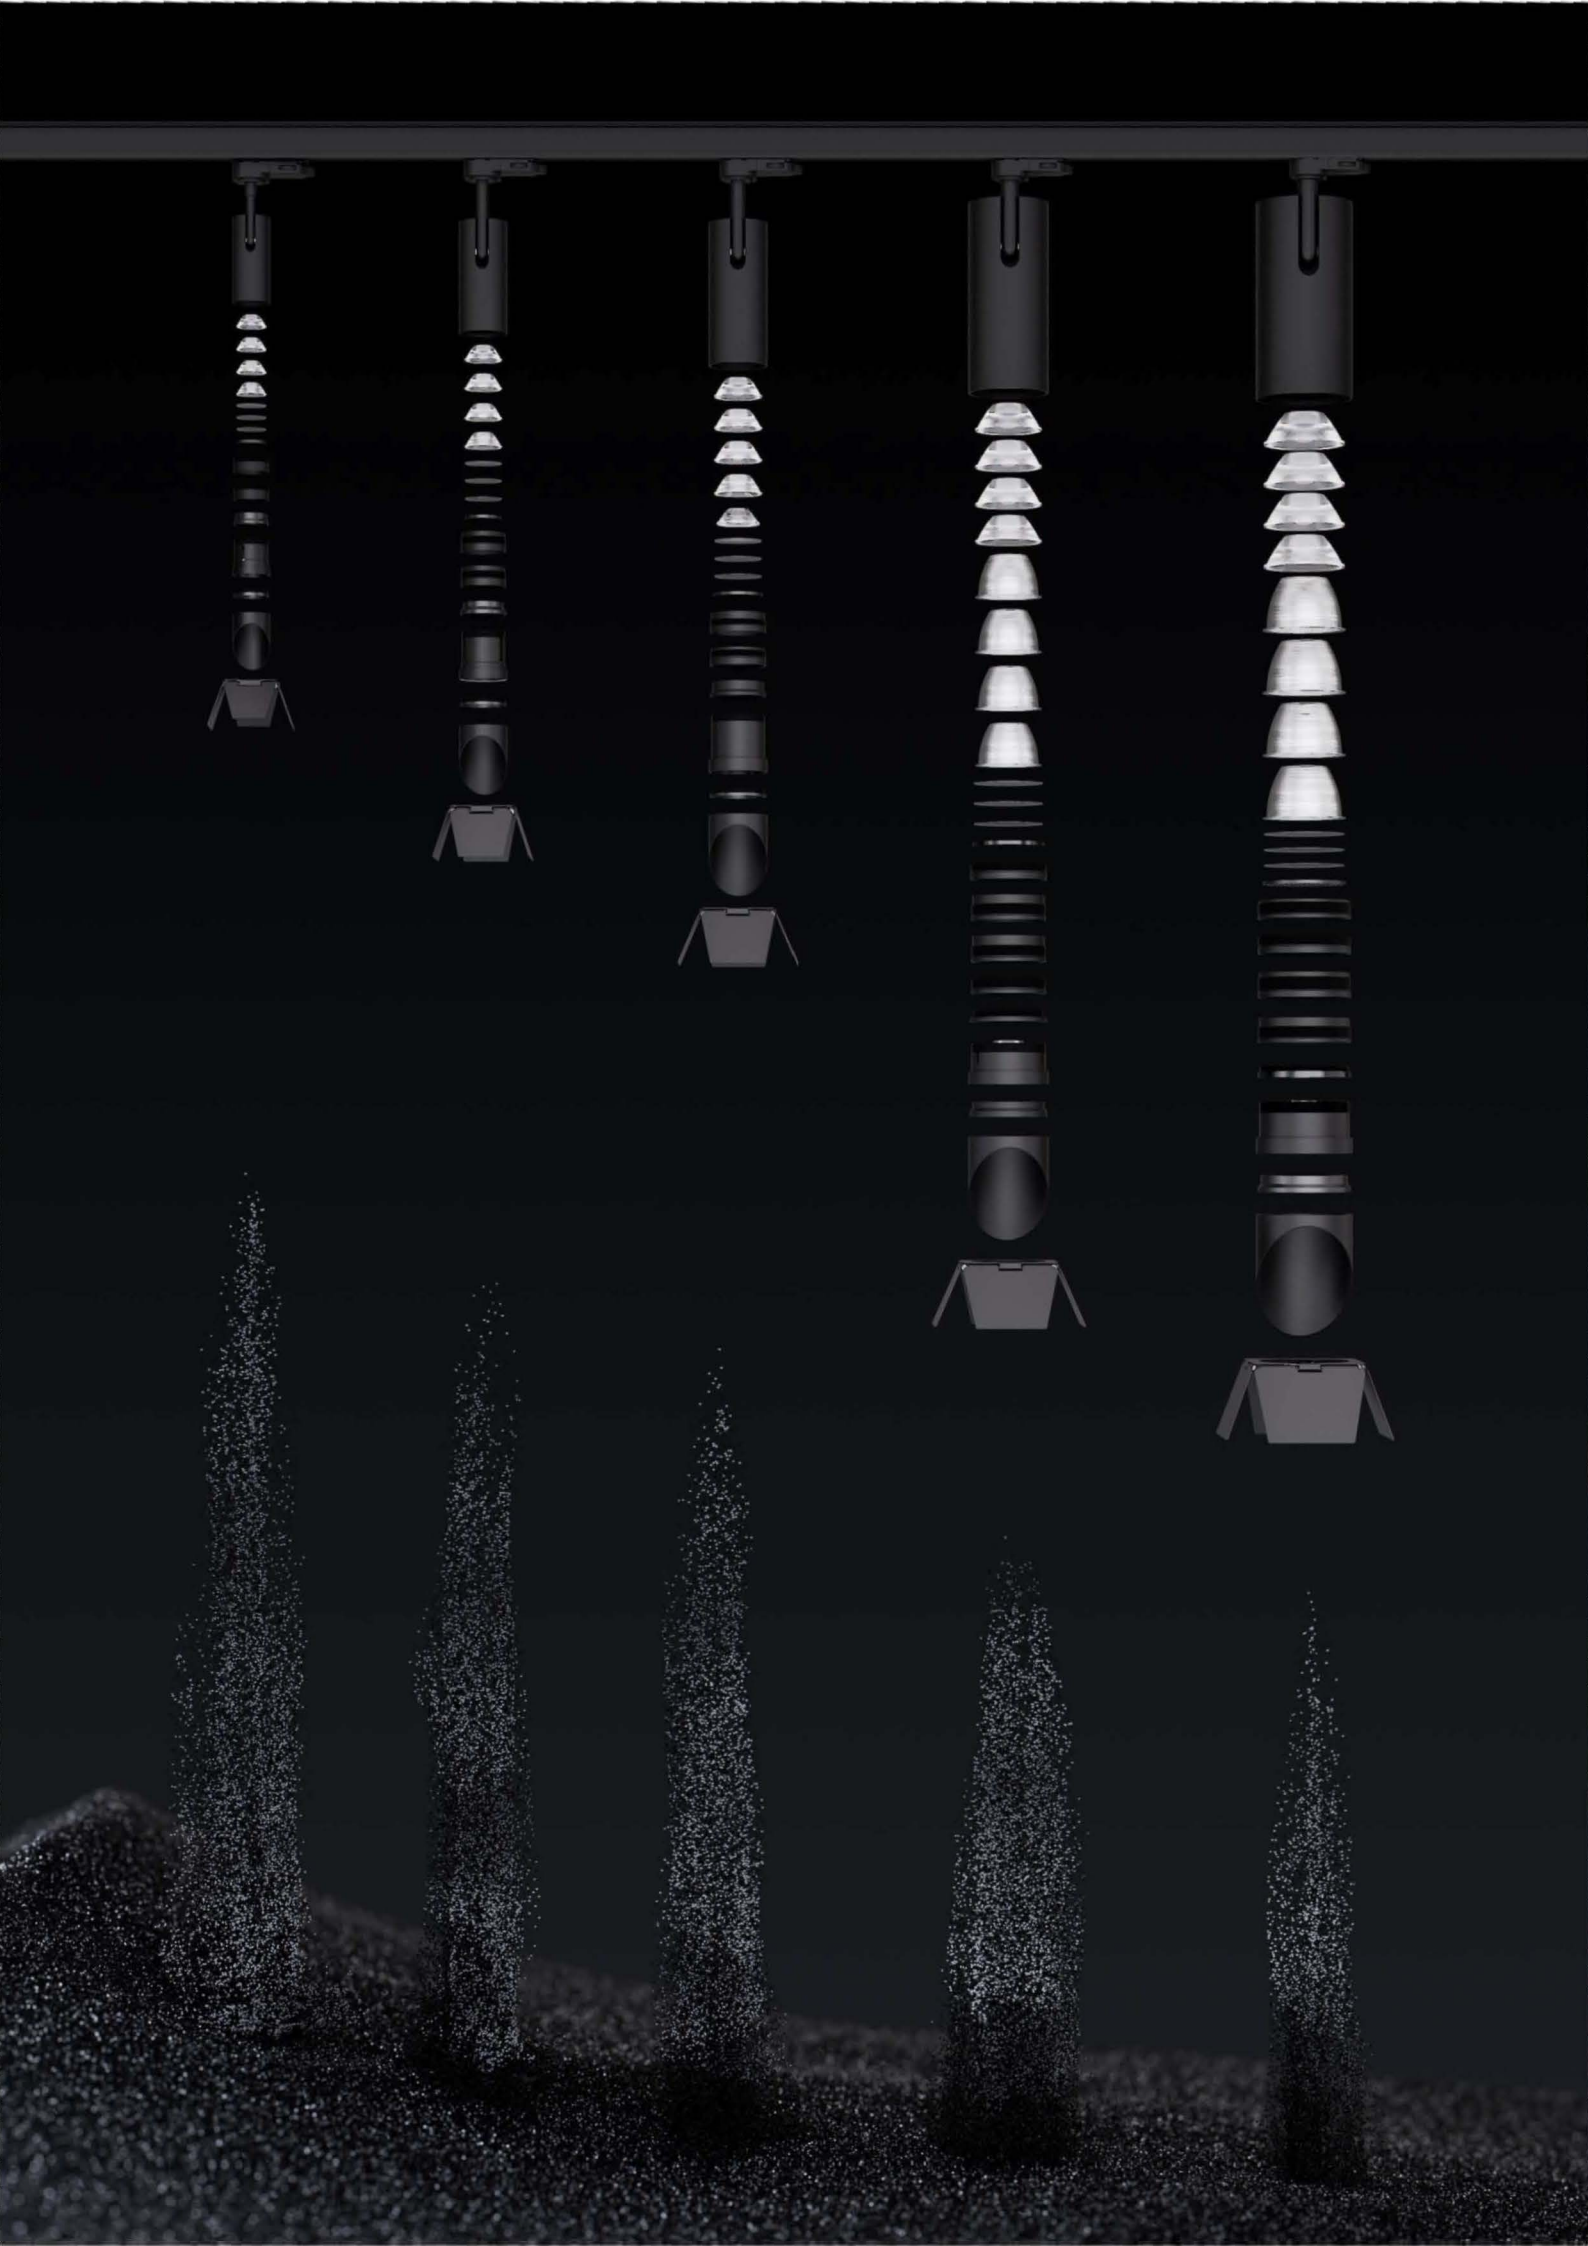

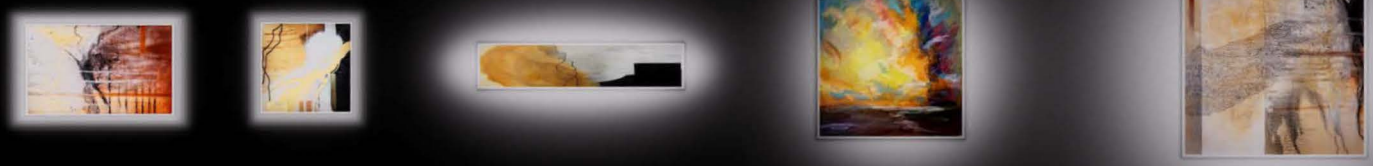





# INDEX
## LED Track Light

10 Series ●05



11 Series ●29



20 Series ●55



21 Series ●65



# LED Track Light

01 Series ●73



Winner Series ●89



Linear Light ●95



# INDEX
# LED Down Light


Down 01 Series ●97



Down 02 Series ●101



Down 03 Series ●111



Down 04 Series ●113



Down 05 Series ●115



# More Lighting Solutions

Track Lighting Accessories ●119











Lighting Controllers ●123









Smart Lighting Introduction ●125









Company Profile ●129

# Track Light

## Professional

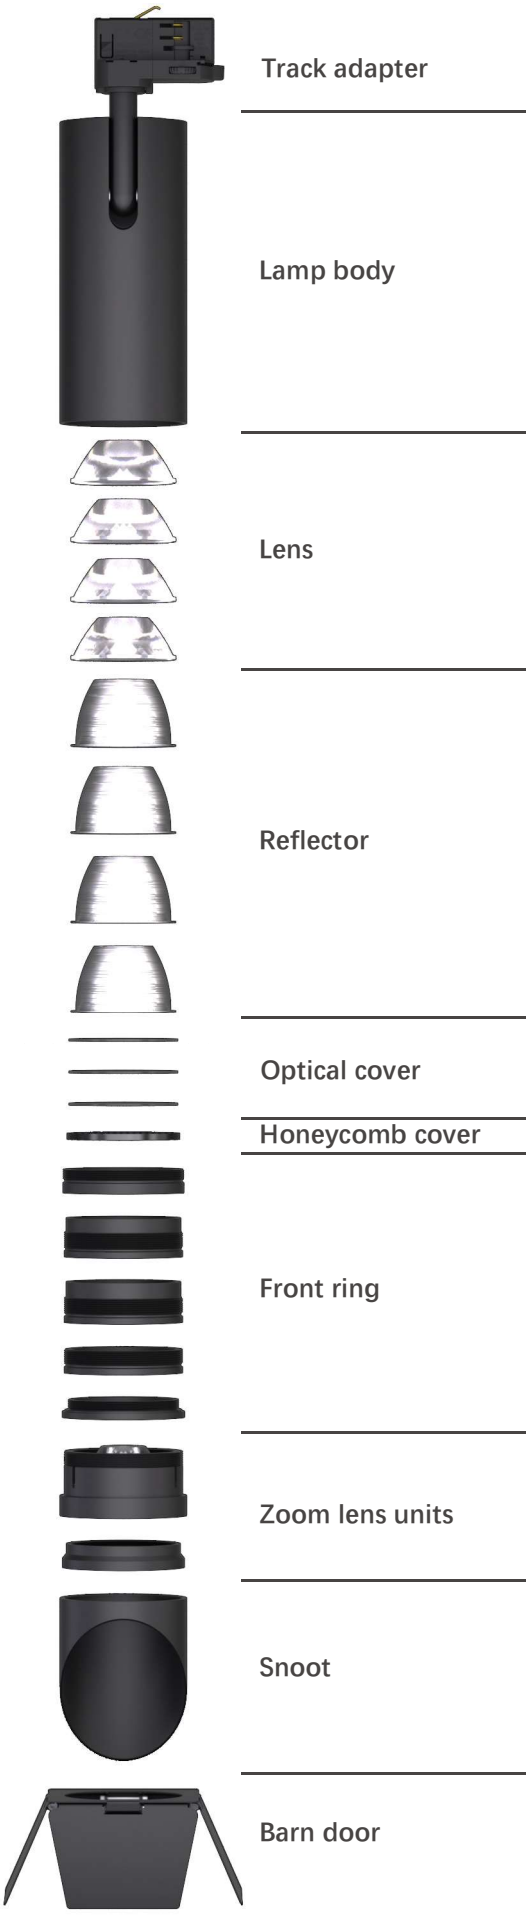



Front ring 1
(reflector)



Front ring 4
(snoot, barn door, reflector)



Front ring 2
(lens)



Front ring 5
(snoot, barn door, lens)




Front ring 3
(snoot, barn door)



Front ring 6
(snoot, barn door, zoom)



Optical cover



Honeycomb cover



Snoot



Barn door



Zoom units



Lens



Reflector





## Zoomable



1035A 1045A 1055A 1075A 1090A

## Fixed lens



1135L 1145L 1155L 1175L 1190L

## Alanod Aluminum Reflector




1175H 1190H

Zoom type



Black



Black
+Lens cover



Black
+ Honeycomb



Black
+Snoot




Black
+Barn door



White



White
+Lens cover



White
+ Honeycomb



White
+Snoot



White
+Barn door

Fixed lens type



Black



White



White+Black ring



Black+ Honeycomb



White+Honeycomb



White+Black ring
+Honeycomb




# 1035A Zoomable

# 1035A, Driver Inside Type












Track




Recessed



Zoom 8~40°




Mounted

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 1035A (TRB) | 5W | Triac Dim | D35*H86 | 8~40° | 27/30/35/4000K | Ra90 | 160lm |

CE | 5 years Warranty | Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black



# 1045A Zoomable





Zoom 8~40°
Zoomable unique design
Oval, Softening, Wide Flood light created by extra lens cover

# 1045A, Driver Inside Type












Track




Recessed



Zoom 8~40°




Mounted

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 1045A (ONF) | 6W | No-Dim | D45*H114 | 8~40° | 27/30/35/4000K | Ra90 | 170lm |
| 1045A (TRB) | 6W | Triac Dim | D45*H114 | 8~40° | 27/30/35/4000K | Ra90 | 170lm |


CE | 5 years Warranty | Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black


# 1045A, Integrated Adapter Type, External Driver Box Type








INT





CAB





DOA




TRI




DAB




RFC, CAC

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 1045A (INT) | 12W | No-Dim | D45*H114 | 8~40° | 27/30/35/4000K | Ra90 | 350lm |
| 1045A (TRI) | 12W | Triac Dim | D45*H114 | 8~40° | 27/30/35/4000K | Ra90 | 350lm |
| 1045A (DOA) | 12W | 1-10V Knob | D45*H114 | 8~40° | 27/30/35/4000K | Ra90 | 350lm |
| 1045A (CAB) | 12W | CASAMBI | D45*H114 | 8~40° | 27/30/35/4000K | Ra90 | 350lm |
| 1045A (DAB) | 12W | DALI, 6 Wire | D45*H114 | 8~40° | 27/30/35/4000K | Ra90 | 350lm |
| 1045A (RFC) | 12W | RF 2.4G | D45*H114 | 8~40° | 2700~5700K | Ra90 | 280lm |
| 1045A (CAC) | 12W | CASAMBI | D45*H114 | 8~40° | 2700~5700K | Ra90 | 280lm |

CE | 5 years Warranty | Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black




# 1055A Zoomable




Zoom 8~50°
Dimmer on lamp
brightness 0.1~100%
Zoomable unique design
Oval, Softening, Wide Flood light created by extra lens cover

# 1055A, Driver Inside Type




















Track




Recessed




Mounted




DOL

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 1055A (ONF12) | 12W | No-Dim | D55*H142 | 8~50° | 27/30/35/4000K | Ra90 | 450lm |
| 1055A (TRB) | 12W | Triac | D55*H142 | 8~50° | 27/30/35/4000K | Ra90 | 450lm |
| 1055A (DOL) | 12W | 1-10V Knob | D55*H142 | 8~50° | 27/30/35/4000K | Ra90 | 450lm |
| 1055A (DAI) | 12W | DALI | D55*H142 | 8~50° | 27/30/35/4000K | Ra90 | 450lm |
| 1055A (ONF15) | 15W | No-Dim | D55*H142 | 15~50° | 27/30/35/4000K | Ra90 | 720lm |

CE | 5 years Warranty | Flicker Free


- Input voltage: AC220~240V
- Housing color: White or Black

# 1055A, Integrated Adapter Type, External Driver Box Type











INT





CAB





DOA




TRI




DAB




RFC, CAC

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 1055A (INT) | 15W | No-Dim | D55*H142 | 15~50° | 27/30/35/4000K | Ra90 | 720lm |
| 1055A (TRI) | 15W | Triac Dim | D55*H142 | 15~50° | 27/30/35/4000K | Ra90 | 720lm |
| 1055A (DOA) | 15W | 1-10V Knob | D55*H142 | 15~50° | 27/30/35/4000K | Ra90 | 720lm |
| 1055A (CAB) | 15W | CASAMBI | D55*H142 | 15~50° | 27/30/35/4000K | Ra90 | 720lm |
| 1055A (DAB) | 15W | DALI, 6 Wire | D55*H142 | 15~50° | 27/30/35/4000K | Ra90 | 720lm |
| 1055A (RFC) | 12W | RF 2.4G | D55*H142 | 15~50° | 2700~5700K | Ra90 | 380lm |
| 1055A (CAC) | 12W | CASAMBI | D55*H142 | 15~50° | 2700~5700K | Ra90 | 380lm |

CE | 5 years Warranty | Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black



# 1075A Zoomable




Zoom 15~55°
Dimmer on lamp
brightness 0.1~100%
Zoomable unique design
Oval, Softening, Wide Flood light created by extra lens cover


# 1075A, Driver Inside Type













Track




Recessed




Mounted




DOL



Zoom 15~55°

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 1075A (ONF) | 20W | No-Dim | D75*H176 | 15~55° | 27/30/35/4000K | Ra90 | 1900lm |
| 1075A (TRB) | 20W | Triac | D75*H176 | 15~55° | 27/30/35/4000K | Ra90 | 1900lm |
| 1075A (DOL) | 20W | 1-10V Knob | D75*H176 | 15~55° | 27/30/35/4000K | Ra90 | 1900lm |
| 1075A (DAI) | 20W | DALI | D75*H176 | 15~55° | 27/30/35/4000K | Ra90 | 1900lm |

CE | 5 years Warranty | Flicker Free


- Input voltage: AC220~240V
- Housing color: White or Black

# 1075A, Integrated Adapter Type, External Driver Box Type











INT





CAB





DOA




TRI




DAB




RFC, CAC

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 1075A (INT) | 25W | No-Dim | D75*H176 | 15~55° | 27/30/35/4000K | Ra90 | 2400lm |
| 1075A (TRI) | 25W | Triac Dim | D75*H176 | 15~55° | 27/30/35/4000K | Ra90 | 2400lm |
| 1075A (DOA) | 25W | 1-10V Knob | D75*H176 | 15~55° | 27/30/35/4000K | Ra90 | 2400lm |
| 1075A (CAB) | 25W | CASAMBI | D75*H176 | 15~55° | 27/30/35/4000K | Ra90 | 2400lm |
| 1075A (DAB) | 25W | DALI, 6Wire | D75*H176 | 15~55° | 27/30/35/4000K | Ra90 | 2400lm |
| 1075A (RFC) | 20W | RF 2.4G | D75*H176 | 15~55° | 2700~5700K | Ra90 | 1500lm |
| 1075A (CAC) | 20W | CASAMBI | D75*H176 | 15~55° | 2700~5700K | Ra90 | 1500lm |

CE | 5 years Warranty | Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black



# 1090A Zoomable




Zoom 15~60°
Dimmer on lamp
brightness 0.1~100%
Zoomable unique design
Oval, Softening, Wide Flood light created by extra lens cover

# 1090A, Driver Inside Type















Zoom 15~60°





Track




Recessed




Mounted




DOL

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 1090A (ONF30) | 30W | No-Dim | D90*H194 | 15~60° | 27/30/35/4000K | Ra90 | 2600lm |
| 1090A (TRB) | 30W | Triac | D90*H194 | 15~60° | 27/30/35/4000K | Ra90 | 2600lm |
| 1090A (DOL) | 30W | 1-10V Knob | D90*H194 | 15~60° | 27/30/35/4000K | Ra90 | 2600lm |
| 1090A (DAI) | 30W | DALI | D90*H194 | 15~60° | 27/30/35/4000K | Ra90 | 2600lm |

CE | 5 years Warranty | Flicker Free


- Input voltage: AC220~240V
- Housing color: White or Black

# 1090A, Integrated Adapter Type, External Driver Box Type











INT





CAB





DOA




TRI




DAB




RFC, CAC

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 1090A (INT) | 30W | No-Dim | D90*H194 | 15~60° | 27/30/35/4000K | Ra90 | 2800lm |
| 1090A (TRI) | 30W | Triac Dim | D90*H194 | 15~60° | 27/30/35/4000K | Ra90 | 2800lm |
| 1090A (DOA) | 30W | 1-10V Knob | D90*H194 | 15~60° | 27/30/35/4000K | Ra90 | 2800lm |
| 1090A (CAB) | 30W | CASAMBI | D90*H194 | 15~60° | 27/30/35/4000K | Ra90 | 2800lm |
| 1090A (DAB) | 30W | DALI, 6 Wire | D90*H194 | 15~60° | 27/30/35/4000K | Ra90 | 2800lm |
| 1090A (RFC) | 30W | RF 2.4G | D90*H194 | 15~60° | 2700~5700K | Ra90 | 2200lm |
| 1090A (CAC) | 30W | CASAMBI | D90*H194 | 15~60° | 2700~5700K | Ra90 | 2200lm |

CE | 5 years Warranty | Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black




# 1135L Fixed Lens

# 1135L, Driver Inside Type












Track




Recessed




Mounted

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 1135L (TRB) | 5W | Triac Dim | D35*H80 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 400lm |

CE | 5 years Warranty | Flicker Free

● Input voltage: AC220~240V ● Housing color: White or Black



# 1145L Fixed Lens





15°
24°
36°
50°
4 beam angle lenses are
directly interchangable

# 1145L, Driver Inside Type












Track




Recessed



15° 24° 36° 50°




Mounted

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 1145L (ONF) | 6W | No-Dim | D45*H105 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 420lm |
| 1145L (TRB) | 6W | Triac | D45*H105 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 420lm |
| 1145L (DTW) | 6W | Triac | D45*H105 | 15°/24°/36°/50° | 3000K to 2000K | Ra90 | 360lm |

CE | 5 years Warranty | Flicker Free


- Input voltage: AC220~240V
- Housing color: White or Black

# 1145L, Integrated Adapter Type, External Driver Box Type











INT





CAB





DOA




TRI




DAB




RFC, CAC

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 1145L (INT) | 12W | No-Dim | D45*H105 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 870lm |
| 1145L (TRI) | 12W | Triac Dim | D45*H105 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 870lm |
| 1145L (DOA) | 12W | 1-10V Knob | D45*H105 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 870lm |
| 1145L (CAB) | 12W | CASAMBI | D45*H105 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 870lm |
| 1145L (DAB) | 12W | DALI, 6 Wire | D45*H105 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 870lm |
| 1145A (RFC) | 12W | RF 2.4G | D45*H105 | 15°/24°/36°/50° | 2700~5700K | Ra90 | 700lm |
| 1145A (CAC) | 12W | CASAMBI | D45*H105 | 15°/24°/36°/50° | 2700~5700K | Ra90 | 700lm |

CE | 5 years Warranty | Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black



# 1155L Fixed Lens







15°
24°
36°
60°
4 beam angle lenses are
directly interchangable
Dimmer on lamp
brightness 0.1~100%


# 1155L, Driver Inside Type












Track





Recessed



4 degree




Mounted




DOL



15° 24° 36° 60°

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 1155L (ONF) | 12W | No-Dim | D55*H131 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 1000lm |
| 1155L (TRB) | 12W | Triac | D55*H131 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 1000lm |
| 1155L (DOL) | 12W | 1-10V Knob | D55*H131 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 1000lm |
| 1155L (DTW) | 12W | Triac | D55*H131 | 15°/24°/36°/60° | 3000K to 2000K | Ra90 | 800lm |
| 1155L (DAI) | 12W | DALI | D55*H131 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 1000lm |
| 1155L (ONF15) | 15W | No-Dim | D55*H131 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 1400lm |
| 1155L (4DOL) | 4W | 1-10V Knob | D55*H131 | 4° | 27/30/35/4000K | Ra90 | 90lm |

CE | 5 years Warranty | Flicker Free


- Input voltage: AC220~240V
- Housing color: White or Black

# 155L, Integrated Adapter Type, External Driver Box Type











INT





CAB





DOA




TRI




DAB




RFC, CAC

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 1155L (INT) | 15W | No-Dim | D55*H131 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 1400lm |
| 1155L (TRI) | 15W | Triac Dim | D55*H131 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 1400lm |
| 1155L (DOA) | 15W | 1-10V Knob | D55*H131 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 1400lm |
| 1155L (CAB) | 15W | CASAMBI | D55*H131 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 1400lm |
| 1155L (DAB) | 15W | DALI, 6 Wire | D55*H131 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 1400lm |
| 1155A (RFC) | 12W | RF 2.4G | D55*H131 | 15°/24°/36°/60° | 2700~5700K | Ra90 | 800lm |
| 1155A (CAC) | 12W | CASAMBI | D55*H131 | 15°/24°/36°/60° | 2700~5700K | Ra90 | 800lm |

CE | 5 years Warranty | Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black



# 1175L Fixed Lens




15°
24°
36°
60°
4 beam angle lenses are
directly interchangable
Dimmer on lamp
brightness 0.1~100%


# 1175L, Driver Inside Type












Track





Recessed



15° 24° 36° 60°




Mounted




DOL

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 1175L (ONF) | 20W | No-Dim | D75*H179 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 2000lm |
| 1175L (TRB) | 20W | Triac | D75*H179 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 2000lm |
| 1175L (DOL) | 20W | 1-10V Knob | D75*H179 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 2000lm |
| 1175L (DAI) | 20W | DALI | D75*H179 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 2000lm |

CE 5 years Warranty Flicker Free


- Input voltage: AC220~240V
- Housing color: White or Black

# 175L, Integrated Adapter Type, External Driver Box Type






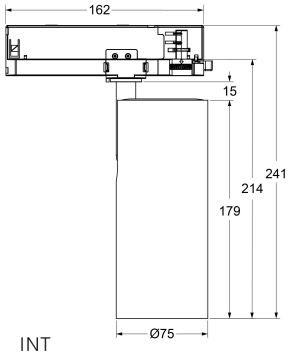




INT





CAB





DOA




TRI




DAB




RFC, CAC

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 1175L (INT) | 25W | No-Dim | D75*H179 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 2500lm |
| 1175L (TRI) | 25W | Triac Dim | D75*H179 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 2500lm |
| 1175L (DOA) | 25W | 1-10V Knob | D75*H179 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 2500lm |
| 1175L (CAB) | 25W | CASAMBI | D75*H179 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 2500lm |
| 1175L (DAB) | 25W | DALI, 6 Wire | D75*H179 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 2500lm |
| 1175A (RFC) | 20W | RF 2.4G | D75*H179 | 15°/24°/36°/60° | 2700~5700K | Ra90 | 1600lm |
| 1175A (CAC) | 20W | CASAMBI | D75*H179 | 15°/24°/36°/60° | 2700~5700K | Ra90 | 1600lm |

CE | 5 years Warranty | Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black



# 1190L Fixed Lens




15°
24°
36°
60°
4 beam angle lenses are
directly interchangable
Dimmer on lamp
brightness 0.1~100%


# 1190L, Driver Inside Type












Track





Recessed



15° 24° 36° 60°




Mounted




DOL

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 1190L (ONF) | 30W | No-Dim | D90*H186 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 3000lm |
| 1190L (TRB) | 30W | Triac | D90*H186 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 3000lm |
| 1190L (DOL) | 30W | 1-10V Knob | D90*H186 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 3000lm |
| 1190L (DAI) | 30W | DALI | D90*H186 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 3000lm |

CE 5 years Warranty Flicker Free


- Input voltage: AC220~240V
- Housing color: White or Black

# 190L, Integrated Adapter Type, External Driver Box Type











INT





CAB





DOA




TRI




DAB




RFC, CAC

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 1190L (INT) | 30W | No-Dim | D90*H186 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 3200lm |
| 1190L (TRI) | 30W | Triac Dim | D90*H186 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 3200lm |
| 1190L (DOA) | 30W | 1-10V Knob | D90*H186 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 3200lm |
| 1190L (CAB) | 30W | CASAMBI | D90*H186 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 3200lm |
| 1190L (DAB) | 30W | DALI, 6 Wire | D90*H186 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 3200lm |
| 1190L (RFC) | 30W | RF 2.4G | D90*H186 | 15°/24°/36°/60° | 2700~5700K | Ra90 | 2400lm |
| 1190L (CAC) | 30W | CASAMBI | D90*H186 | 15°/24°/36°/60° | 2700~5700K | Ra90 | 2400lm |

CE | 5 years Warranty | Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black



# 1175H Alanod Aluminum Reflector




Dimmer on lamp
brightness 0.1~100%
Made with Alanod Aluminum Reflector
High brightness efficiency, more energy saving!


# 1175H, Driver Inside Type













Track




Recessed




Mounted




DOL

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 1175H (ONF) | 20W | No-Dim | D75*H179 | 20°/38°/60° | 27/30/35/4000K | Ra90 | 2200lm |
| 1175H (TRB) | 20W | Triac | D75*H179 | 20°/38°/60° | 27/30/35/4000K | Ra90 | 2200lm |
| 1175H (DOL) | 20W | 1-10V Knob | D75*H179 | 20°/38°/60° | 27/30/35/4000K | Ra90 | 2200lm |
| 1175H (DAI) | 20W | DALI | D75*H179 | 20°/38°/60° | 27/30/35/4000K | Ra90 | 2200lm |

CE | 5 years Warranty | Flicker Free


- Input voltage: AC220~240V
- Housing color: White or Black

# 175H, Integrated Adapter Type, External Driver Box Type






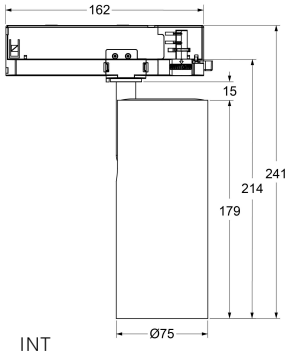




INT





CAB





DOA




TRI




DAB




RFC, CAC

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 1175H (INT) | 25W | No-Dim | D75*H179 | 20°/38°/60° | 27/30/35/4000K | Ra90 | 2700lm |
| 1175H (TRI) | 25W | Triac Dim | D75*H179 | 20°/38°/60° | 27/30/35/4000K | Ra90 | 2700lm |
| 1175H (DOA) | 25W | 1-10V Knob | D75*H179 | 20°/38°/60° | 27/30/35/4000K | Ra90 | 2700lm |
| 1175H (CAB) | 25W | CASAMBI | D75*H179 | 20°/38°/60° | 27/30/35/4000K | Ra90 | 2700lm |
| 1175H (DAB) | 25W | DALI,6 Wire | D75*H179 | 20°/38°/60° | 27/30/35/4000K | Ra90 | 2700lm |
| 1175H (RFC) | 20W | RF 2.4G | D75*H179 | 20°/38°/60° | 2700~5700K | Ra90 | 1800lm |
| 1175H (CAC) | 20W | CASAMBI | D75*H179 | 20°/38°/60° | 2700~5700K | Ra90 | 1800lm |

CE | 5 years Warranty | Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black



# 1190H Alanod Aluminum Reflector




Dimmer on lamp
brightness 0.1~100%
Made with Alanod Aluminum Reflector
High brightness efficiency, more energy saving!


# 1190H, Driver Inside Type













Track




Recessed




Mounted




DOL

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 1190H (ONF) | 30W | No-Dim | D90*H186 | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 3200lm |
| 1190H (TRB) | 30W | Triac | D90*H186 | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 3200lm |
| 1190H (DOL) | 30W | 1-10V Knob | D90*H186 | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 3200lm |
| 1190H (DAI) | 30W | DALI | D90*H186 | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 3200lm |

- Input voltage: AC220~240V
- Housing color: White or Black


CE | 5 years Warranty | Flicker Free

# 190H, Integrated Adapter Type, External Driver Box Type











INT





CAB





DOA




TRI




DAB




RFC, CAC

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 1190H (INT) | 30W | No-Dim | D90*H186 | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 3400lm |
| 1190H (TRI) | 30W | Triac Dim | D90*H186 | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 3400lm |
| 1190H (DOA) | 30W | 1-10V Knob | D90*H186 | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 3400lm |
| 1190H (CAB) | 30W | CASAMBI | D90*H186 | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 3400lm |
| 1190H (DAB) | 30W | DALI, 6 Wire | D90*H186 | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 3400lm |
| 1190H (RFC) | 30W | RF 2.4G | D90*H186 | 15°/24°/38°/60° | 2700~5700K | Ra90 | 2600lm |
| 1190H (CAC) | 30W | CASAMBI | D90*H186 | 15°/24°/38°/60° | 2700~5700K | Ra90 | 2600lm |

CE | 5 years Warranty | Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black

# A20, A21 Series Art
# Gallery Level Lighting

Zoomable



2062A

2090A

Fixed lens



2162L

2190L

Zoom type



Black



Black
+Lens cover



Black
+ Honeycomb



Black
+Snoot



Black
+Barn door



White



White
+Lens cover



White
+ Honeycomb



White
+Snoot



White
+Barn door

Fixed lens type



Black



White



White+Black ring



Black+ Honeycomb



White+Honeycomb



White+Black ring
+Honeycomb




# 2062A Zoomable




Zoom 11~50°
Dimmer on lamp
brightness 0.1~100%
CCT switchable
3000K-4000K-5700K CRI90
Zoomable unique design
Oval, Softening, Wide Flood light created by extra lens cover


# 2062A, Driver Inside Type



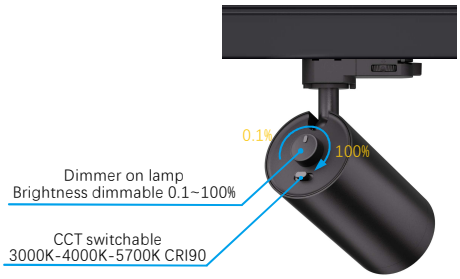








Track





Recessed





DCT




Mounted




DOL

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 2062A (ONF) | 12W | No-Dim | D62*H120 | 11~50° | 27/30/35/4000K | Ra90 | 850lm |
| 2062A (TRB) | 12W | Triac | D62*H120 | 11~50° | 27/30/35/4000K | Ra90 | 850lm |
| 2062A (DOL) | 12W | 1-10V Knob | D62*H120 | 11~50° | 27/30/35/4000K | Ra90 | 850lm |
| 2062A (DCT) | 12W | 1-10V Knob | D62*H120 | 11~50° | 3000-4000-5700K | Ra90 | 700lm |
| 2062A (DAI) | 12W | DALI | D62*H120 | 11~50° | 27/30/35/4000K | Ra90 | 850lm |

CE | 5 years Warranty | Flicker Free


- Input voltage: AC220~240V
- Housing color: White or Black

# 2062A, Integrated Adapter Type, External Driver Box Type











INT





CAB





DOA




TRI




DAB




RFC, CAC

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 2062A (INT) | 12W | No-Dim | D62*H120 | 11~50° | 27/30/35/4000K | Ra90 | 920lm |
| 2062A (TRI) | 12W | Triac Dim | D62*H120 | 11~50° | 27/30/35/4000K | Ra90 | 920lm |
| 2062A (DOA) | 12W | 1-10V Knob | D62*H120 | 11~50° | 27/30/35/4000K | Ra90 | 920lm |
| 2062A (CAB) | 12W | CASAMBI | D62*H120 | 11~50° | 27/30/35/4000K | Ra90 | 920lm |
| 2062A (DAB) | 12W | DALI, 6 Wire | D62*H120 | 11~50° | 27/30/35/4000K | Ra90 | 920lm |
| 2062A (RFC) | 12W | RF 2.4G | D62*H120 | 11~50° | 2700~5700K | Ra90 | 700lm |
| 2062A (CAC) | 12W | CASAMBI | D62*H120 | 11~50° | 2700~5700K | Ra90 | 700lm |

CE | 5 years Warranty | Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black




# 2090A Zoomable




Zoom 15~60°
Dimmer on lamp
brightness 0.1~100%
CCT switchable
3000K-4000K-5700K CRI90
Zoomable unique design
Oval, Softening, Wide Flood light created by extra lens cover


# 2090A, Driver Inside Type



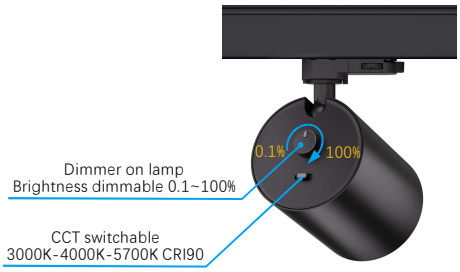








Track





Recessed





DCT



Zoom 15~60°




Mounted




DOL

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 2090A (ONF) | 20W | No-Dim | D90*H118 | 15~60° | 27/30/35/4000K | Ra90 | 1900lm |
| 2090A (TRB) | 20W | Triac | D90*H118 | 15~60° | 27/30/35/4000K | Ra90 | 1900lm |
| 2090A (DOL) | 20W | 1-10V Knob | D90*H118 | 15~60° | 27/30/35/4000K | Ra90 | 1900lm |
| 2090A (DCT) | 20W | 1-10V Knob | D90*H118 | 15~60° | 3000-4000-5700K | Ra90 | 1900lm |
| 2090A (DAI) | 20W | DALI | D90*H118 | 15~60° | 27/30/35/4000K | Ra90 | 1900lm |

CE | 5 years Warranty | Flicker Free


- Input voltage: AC220~240V
- Housing color: White or Black

# 2090A, Integrated Adapter Type, External Driver Box Type











INT





CAB





DOA




TRI




DAB




RFC, CAC

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 2090A (INT) | 25W | No-Dim | D90*H118 | 15~60° | 27/30/35/4000K | Ra90 | 2400lm |
| 2090A (TRI) | 25W | Triac Dim | D90*H118 | 15~60° | 27/30/35/4000K | Ra90 | 2400lm |
| 2090A (DOA) | 25W | 1-10V Knob | D90*H118 | 15~60° | 27/30/35/4000K | Ra90 | 2400lm |
| 2090A (CAB) | 25W | CASAMBI | D90*H118 | 15~60° | 27/30/35/4000K | Ra90 | 2400lm |
| 2090A (DAB) | 25W | DALI, 6 Wire | D90*H118 | 15~60° | 27/30/35/4000K | Ra90 | 2400lm |
| 2090A (RFC) | 20W | RF 2.4G | D90*H118 | 15~60° | 2700~5700K | Ra90 | 1500lm |
| 2090A (CAC) | 20W | CASAMBI | D90*H118 | 15~60° | 2700~5700K | Ra90 | 1500lm |


CE | 5 years Warranty | Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black



# 2162L Fixed Lens




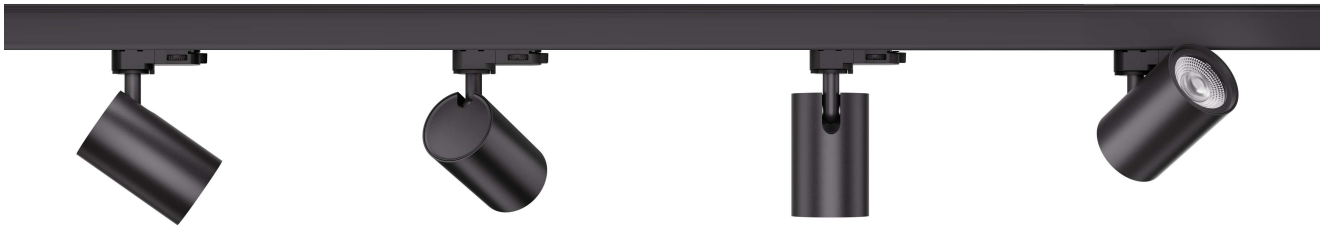


15°
24°
36°
60°
4 beam angle lenses are
directly interchangable
Dimmer on lamp
brightness 0.1~100%
CCT switchable
3000K-4000K-5700K CRI90


# 2162L, Driver Inside Type



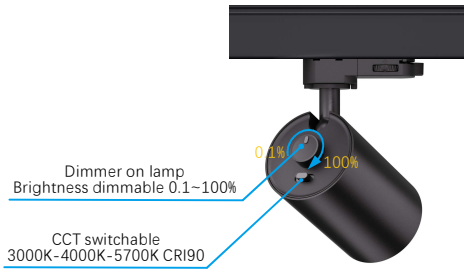









Track





Recessed




DCT




Mounted




DOL



15° 24° 36° 60°

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 2162L (ONF) | 12W | No-Dim | D62*H98 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 1000lm |
| 2162L (TRB) | 12W | Triac | D62*H98 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 1000lm |
| 2162L (DOL) | 12W | 1-10V Knob | D62*H98 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 1000lm |
| 2162L (DCT) | 12W | 1-10V Knob | D62*H98 | 15°/24°/36°/60° | 3000-4000-5700K | Ra90 | 1000lm |
| 2162L (DTW) | 12W | Triac | D62*H98 | 15°/24°/36°/60° | 3000K to 2000K | Ra90 | 800lm |
| 2162L (DAI) | 12W | DALI | D62*H98 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 1000lm |

CE 5 years Warranty Flicker Free


● Input voltage: AC220~240V ● Housing color: White or Black

# 2162L, Integrated Adapter Type, External Driver Box Type











INT





CAB





DOA




TRI




DAB




RFC, CAC

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 2162L (INT) | 12W | No-Dim | D62*H98 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 1100lm |
| 2162L (TRI) | 12W | Triac Dim | D62*H98 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 1100lm |
| 2162L (DOA) | 12W | 1-10V Knob | D62*H98 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 1100lm |
| 2162L (CAB) | 12W | CASAMBI | D62*H98 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 1100lm |
| 2162L (DAB) | 12W | DALI, 6 Wire | D62*H98 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 1100lm |
| 2162L (RFC) | 12W | RF 2.4G | D62*H98 | 15°/24°/36°/60° | 2700~5700K | Ra90 | 800lm |
| 2162L (CAC) | 12W | CASAMBI | D62*H98 | 15°/24°/36°/60° | 2700~5700K | Ra90 | 800lm |

CE | 5 years Warranty | Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black



# 2190L Fixed Lens








15°
24°
36°
60°
4 beam angle lenses are
directly interchangable
Dimmer on lamp
brightness 0.1~100%
CCT switchable
3000K-4000K-5700K CRI90


# 2190L, Driver Inside Type



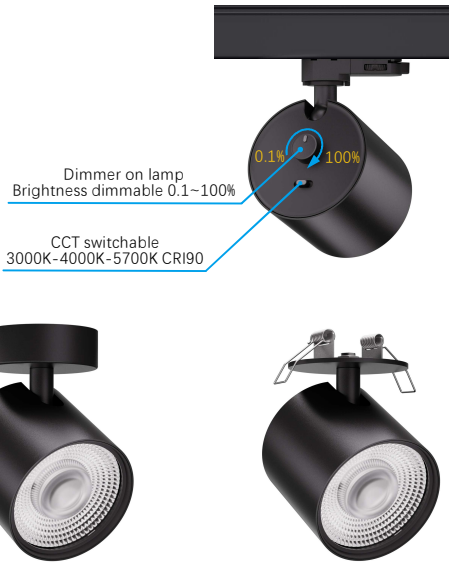




Track





Recessed




DCT




Mounted




DOL




| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 2190L (ONF) | 20W | No-Dim | D90*H83 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 2000lm |
| 2190L (TRB) | 20W | Triac | D90*H83 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 2000lm |
| 2190L (DOL) | 20W | 1-10V Knob | D90*H83 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 2000lm |
| 2190L (DCT) | 20W | 1-10V Knob | D90*H83 | 15°/24°/36°/60° | 3000-4000-5700K | Ra90 | 2000lm |
| 2190L (DAI) | 20W | DALI | D90*H83 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 2000lm |

CE | 5 years Warranty | Flicker Free


- Input voltage: AC220~240V
- Housing color: White or Black

# 2190L, Integrated Adapter Type, External Driver Box Type











INT





CAB





DOA




TRI




DAB




RFC, CAC

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 2190L (INT) | 25W | No-Dim | D90*H83 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 2500lm |
| 2190L (TRI) | 25W | Triac Dim | D90*H83 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 2500lm |
| 2190L (DOA) | 25W | 1-10V Knob | D90*H83 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 2500lm |
| 2190L (CAB) | 25W | CASAMBI | D90*H83 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 2500lm |
| 2190L (DAB) | 25W | DALI, 6 Wire | D90*H83 | 15°/24°/36°/60° | 27/30/35/4000K | Ra90 | 2500lm |
| 2190L (RFC) | 20W | RF 2.4G | D90*H83 | 15°/24°/36°/60° | 2700~5700K | Ra90 | 1600lm |
| 2190L (CAC) | 20W | CASAMBI | D90*H83 | 15°/24°/36°/60° | 2700~5700K | Ra90 | 1600lm |

CE | 5 years Warranty | Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black

# Series Spotlight

D40B



D50B



D55B



D40C



D50C



D90A





Black



Black+ Honeycomb



Black+Gold ring




Black+Gold ring
+Honeycomb



White



White+Black ring



White+Gold ring



White+Honeycomb



White+Black ring
+Honeycomb



White+Gold ring
+Honeycomb



Mirror Chrome



Brushed Nickel



Brushed Bronze


# D40B 6W














Track




Recessed








Mounted



| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 0140B (ONF) | 6W | No-Dim | D40*H105 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 500lm |
| 0140B (TRB) | 6W | Triac | D40*H105 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 500lm |
| 0140B (DTW) | 6W | Triac | D40*H105 | 15°/24°/36°/50° | 3000K to 2000K | Ra90 | 400lm |

CE | 5 years Warranty | Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black


# D50B 10W














Track




Recessed








Mounted



| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 0150B (ONF) | 10W | No-Dim | D50*H110 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 850lm |
| 0150B (TRB) | 10W | Triac | D50*H110 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 850lm |
| 0150B (DTW) | 10W | Triac | D50*H110 | 15°/24°/36°/50° | 3000K to 2000K | Ra90 | 680lm |

CE | 5 years Warranty | Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black


# D55B 12W














Track




Recessed




Mounted

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 0155B (ONF) | 12W | No-Dim | D55*H115 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 1050lm |
| 0155B (TRB) | 12W | Triac | D55*H115 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 1050lm |
| 0155B (DTW) | 12W | Triac | D55*H115 | 15°/24°/36°/50° | 3000K to 2000K | Ra90 | 850lm |

CE 5 years Warranty Flicker Free

● Input voltage: AC220~240V ● Housing color: White or Black

# D40C 6W
















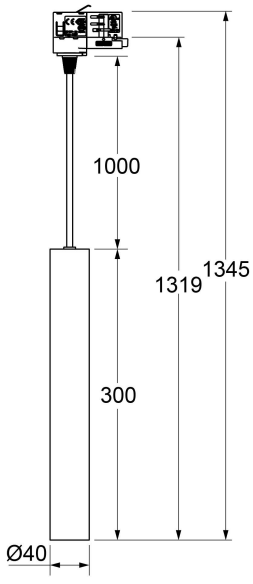

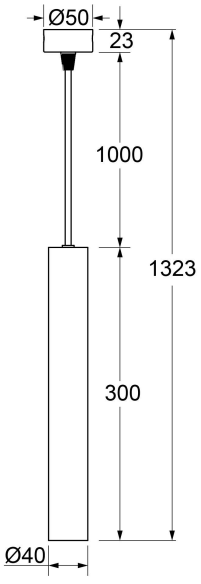
Track Mounted Recessed
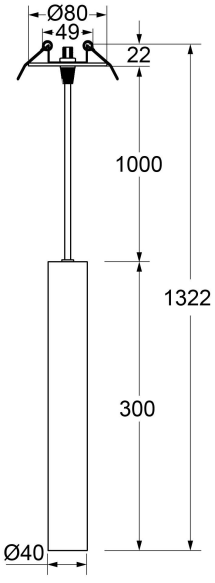
| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 0140C (ONF) | 6W | No-Dim | D40*H300 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 500lm |
| 0140C (TRB) | 6W | Triac | D40*H300 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 500lm |
| 0140C (DTW) | 6W | Triac | D40*H300 | 15°/24°/36°/50° | 3000K to 2000K | Ra90 | 400lm |

CE 5 years Warranty Flicker Free

● Input voltage: AC220~240V ● Housing color: White or Black


# D50C 10W









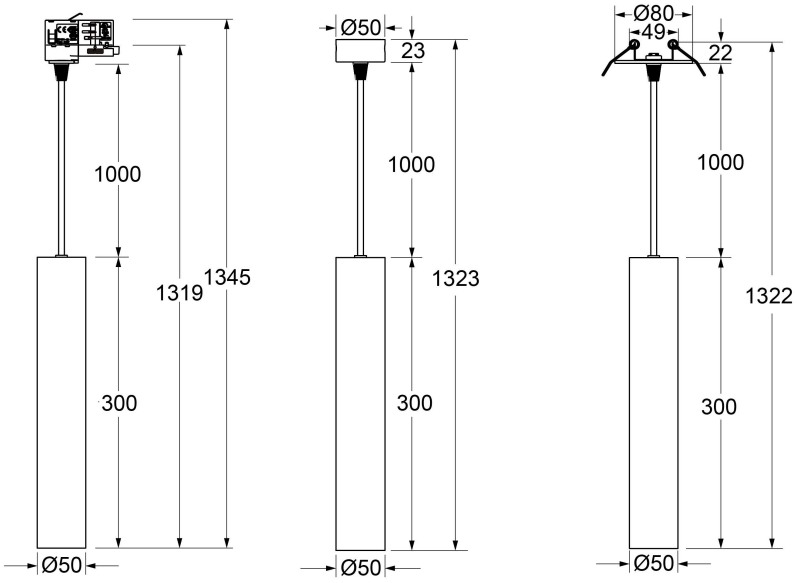


Track Mounted Recessed

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 0150C (ONF) | 10W | No-Dim | D50*H300 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 850lm |
| 0150C (TRB) | 10W | Triac | D50*H300 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 850lm |
| 0150C (DTW) | 10W | Triac | D50*H300 | 15°/24°/36°/50° | 3000K to 2000K | Ra90 | 680lm |


CE 5 years Warranty Flicker Free

● Input voltage: AC220~240V ● Housing color: White or Black

# D90A 20W





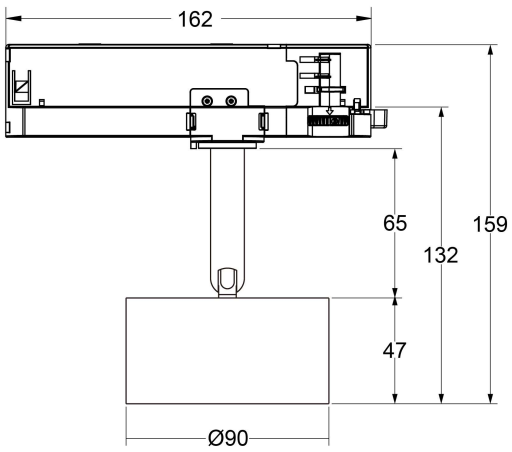


| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 0190A (ONF) | 20W | No-Dim | D90*H47 | 15°/20°/36°/60° | 27/30/35/4000K | Ra90 | 1800lm |
| 0190A (TRB) | 20W | Triac | D90*H47 | 15°/20°/36°/60° | 27/30/35/4000K | Ra90 | 1800lm |

CE 5 years Warranty Flicker Free

● Input voltage: AC220~240V ● Housing color: White or Black


# DALI








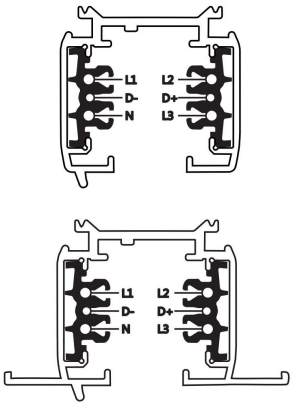



DALI control by 6 wires 3-phase track system





D50




D90




DALI controller




D55

Brightness 

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 0150B (DAB) | 12W | DALI, 6 Wire | D50*H110 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 1050lm |
| 0155B (DAB) | 15W | DALI, 6 Wire | D55*H115 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 1250lm |
| 0190A (DAB) | 20W | DALI, 6 Wire | D90*H47 | 15°/20°/36°/60° | 27/30/35/4000K | Ra90 | 1800lm |

CE 5 years Warranty Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black

# Winner Series Track Light
## High Cost-effective

W1 W2 W3 W12




# Winner series: 30W 35W 45W







High quality materials, 5 years warranty




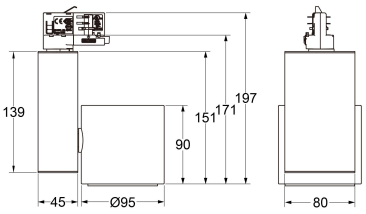



Track 30W





Track 35W





Track 45W

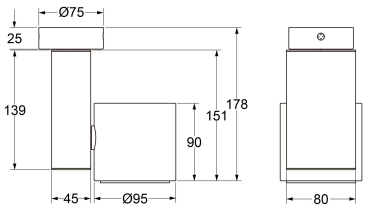


Mounted 30W




Mounted 35W




Mounted 45W

| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 130A | 30W | NO-Dim | D95*H90 | 15°/24°/36°/60° | 27/30/40/5000K | Ra90 | 2800lm |
| 130B | 30W | NO-Dim | D95*H90 | 15°/24°/36°/60° | 27/30/40/5000K | Ra90 | 2900lm |
| 130C | 30W | NO-Dim | D95*H90 | 15°/24°/36°/60° | 27/30/40/5000K | Ra90 | 2900lm |
| 135C | 35W | NO-Dim | D95*H120 | 15°/24°/36°/60° | 27/30/40/5000K | Ra90 | 3500lm |
| 145C | 45W | NO-Dim | D95*H140 | 15°/24°/36°/60° | 27/30/40/5000K | Ra90 | 4200lm |

CE | 5 years Warranty | Flicker Free


- Input voltage: AC220~240V
- Housing color: White or Black

# Winner series: 25W












Track




Recessed




Mounted


| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 225A | 25W | NO-Dim | D77*H183 | 15°/24°/36°/50° | 27/30/40/5000K | Ra90 | 2400lm |
| 225B | 25W | NO-Dim | D77*H183 | 15°/24°/36°/50° | 27/30/40/5000K | Ra90 | 2500lm |
| 225C | 25W | NO-Dim | D77*H183 | 15°/24°/36°/50° | 27/30/40/5000K | Ra90 | 2500lm |

CE | 5 years Warranty | Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black

# Winner series: 30W



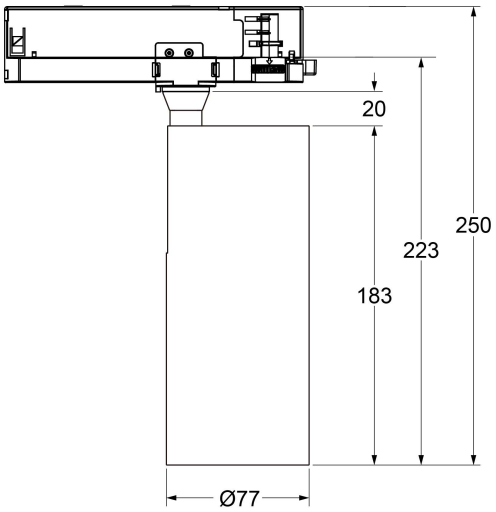



| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 230A | 30W | NO-Dim | D77*H183 | 15°/24°/36°/50° | 27/30/40/5000K | Ra90 | 2900lm |
| 230B | 30W | NO-Dim | D77*H183 | 15°/24°/36°/50° | 27/30/40/5000K | Ra90 | 3000lm |
| 230C | 30W | NO-Dim | D77*H183 | 15°/24°/36°/50° | 27/30/40/5000K | Ra90 | 3000lm |

CE | 5 years Warranty | Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black

# Winner series: 32W



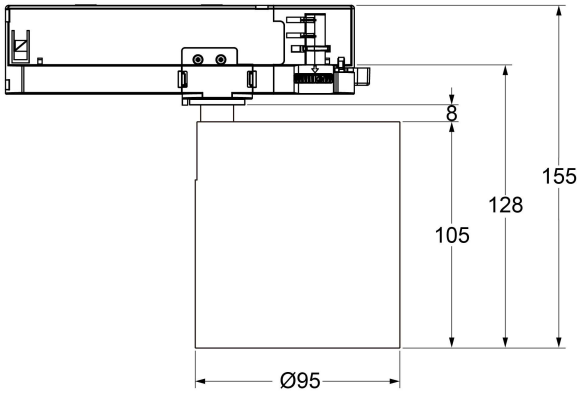



| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 332A | 32W | NO-Dim | D95*H105 | 15°/24°/36°/60° | 27/30/40/5000K | Ra90 | 3000lm |
| 332B | 32W | NO-Dim | D95*H105 | 15°/24°/36°/60° | 27/30/40/5000K | Ra90 | 3100lm |
| 332C | 32W | NO-Dim | D95*H105 | 15°/24°/36°/60° | 27/30/40/5000K | Ra90 | 3100lm |

CE | 5 years Warranty | Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black

# Winner series



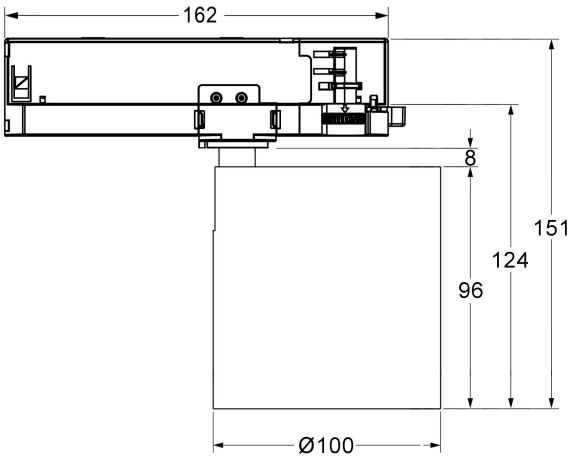




Alanod Aluminum Reflector.
VS LED driver and LED chip inside.
High brightness efficiency, more energy saving.
940 4000K CRI90, 110-125lm/W.
25W 3100lm, 30W 3700lm, 36W 4000lm.

Food Lighting:
ME1, ME2: for meat ligthing
BR: for bread lighting
FS: for fish lighting




| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 12100A (ONF) | 25W | NO-Dim | D100*H96 | 15°/24°/36°/60° | 30/40/5000K | Ra90 | 28/31/3200lm |
| 12100A (DAB) | 25W | DALI, 6 Wire | D100*H96 | 15°/24°/36°/60° | 30/40/5000K | Ra90 | 28/31/3200lm |
| 12100A (ONF) | 30W | NO-Dim | D100*H96 | 15°/24°/36°/60° | 30/40/5000K | Ra90 | 34/37/3800lm |
| 12100A (DAB) | 30W | DALI, 6 Wire | D100*H96 | 15°/24°/36°/60° | 30/40/5000K | Ra90 | 34/37/3800lm |
| 12100A (BR) | 30W | NO-Dim | D100*H96 | 15°/24°/36°/60° | 2400K | Ra90 | 2700lm |
| 12100A (ME1) | 30W | NO-Dim | D100*H96 | 15°/24°/36°/60° | 3200K | Ra70 | 1700lm |
| 12100A (ME2) | 30W | NO-Dim | D100*H96 | 15°/24°/36°/60° | 1900K | Ra80 | 1700lm |
| 12100A (FS) | 30W | NO-Dim | D100*H96 | 15°/24°/36°/60° | 7000K | Ra90 | 3800lm |
| 12100A (ONF) | 36W | NO-Dim | D100*H96 | 15°/24°/36°/60° | 30/40/5000K | Ra80 | 37/40/4100lm |
| 12100A (DAB) | 36W | DALI, 6 Wire | D100*H96 | 15°/24°/36°/60° | 30/40/5000K | Ra90 | 37/40/4100lm |


CE | 5 years Warranty | Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black

# Linear Light Series: Track Adapter Type
















| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 20W5712T (PH) | 20W | NO-Dim | L600*W50*H70 | 100° | 30/40/50/5700K | Ra90 | 1800lm |
| 25W5712T (PH) | 25W | NO-Dim | L600*W50*H70 | 100° | 30/40/50/5700K | Ra90 | 2000lm |
| 40W5712T (PH) | 40W | NO-Dim | L1200*W50*H70 | 100° | 30/40/50/5700K | Ra90 | 3600lm |
| 60W5712T (PH) | 60W | NO-Dim | L1800*W50*H70 | 100° | 30/40/50/5700K | Ra90 | 4800lm |
| 25W5712T (RFB) | 25W | RF 2.4G | L600*W50*H70 | 100° | 30/40/50/5700K | Ra90 | 2000lm |
| 40W5712T (RFB) | 40W | RF 2.4G | L1200*W50*H70 | 100° | 30/40/50/5700K | Ra90 | 3600lm |
| 25W5712T (RFC) | 25W | RF 2.4G | L600*W50*H70 | 100° | 3000~5700K | Ra90 | 2000lm |
| 40W5712T (RFC) | 40W | RF 2.4G | L1200*W50*H70 | 100° | 3000~5700K | Ra90 | 3600lm |
| 20W5712T (DAB) | 20W | DALI | L600*W50*H70 | 100° | 30/40/50/5700K | Ra90 | 1800lm |
| 40W5712T (DAB) | 40W | DALI | L1200*W50*H70 | 100° | 30/40/50/5700K | Ra90 | 3600lm |
| 60W5712T (DAB) | 60W | DALI | L1800*W50*H70 | 100° | 30/40/50/5700K | Ra90 | 5400lm |

CE | 5 years Warranty | Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black

# Linear Light Series: Pendant Type



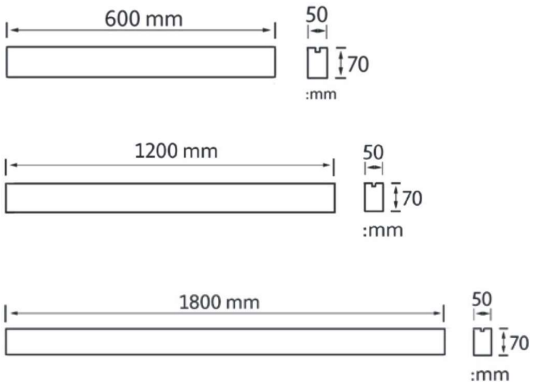





| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 20W5712H (PH) | 20W | NO-Dim | L600*W50*H70 | 100° | 30/40/50/5700K | Ra90 | 1800lm |
| 25W5712H (PH) | 25W | NO-Dim | L600*W50*H70 | 100° | 30/40/50/5700K | Ra90 | 2000lm |
| 40W5712H (PH) | 40W | NO-Dim | L1200*W50*H70 | 100° | 30/40/50/5700K | Ra90 | 3600lm |
| 60W5712H (PH) | 60W | NO-Dim | L1800*W50*H70 | 100° | 30/40/50/5700K | Ra90 | 4800lm |
| 25W5712H (RFB) | 25W | RF 2.4G | L600*W50*H70 | 100° | 30/40/50/5700K | Ra90 | 2000lm |
| 40W5712H (RFB) | 40W | RF 2.4G | L1200*W50*H70 | 100° | 30/40/50/5700K | Ra90 | 3600lm |
| 25W5712H (RFC) | 25W | RF 2.4G | L600*W50*H70 | 100° | 3000~5700K | Ra90 | 2000lm |
| 40W5712H (RFC) | 40W | RF 2.4G | L1200*W50*H70 | 100° | 3000~5700K | Ra90 | 3600lm |
| 20W5712H (DAB) | 20W | DALI | L600*W50*H70 | 100° | 30/40/50/5700K | Ra90 | 1800lm |
| 40W5712H (DAB) | 40W | DALI | L1200*W50*H70 | 100° | 30/40/50/5700K | Ra90 | 3600lm |
| 60W5712H (DAB) | 60W | DALI | L1800*W50*H70 | 100° | 30/40/50/5700K | Ra90 | 5400lm |

CE | 5 years Warranty | Flicker Free


- Input voltage: AC220~240V
- Housing color: White or Black

# Downlight Series



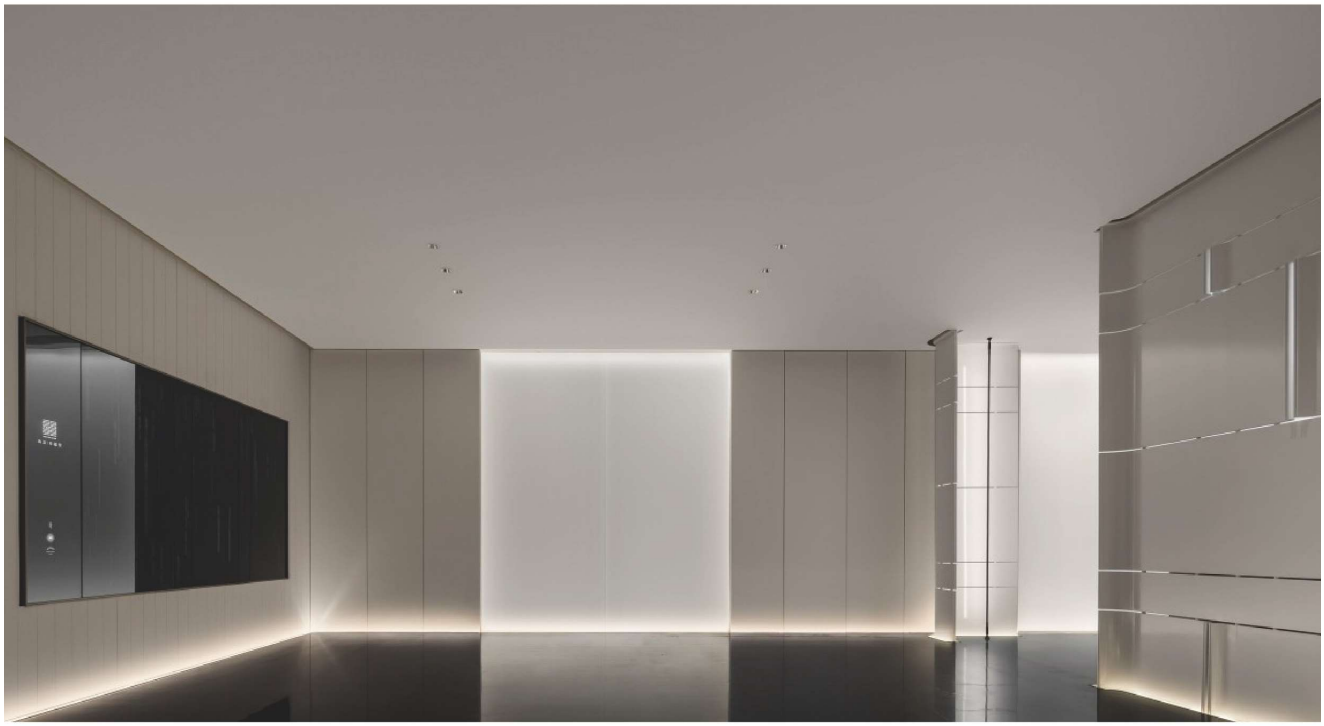



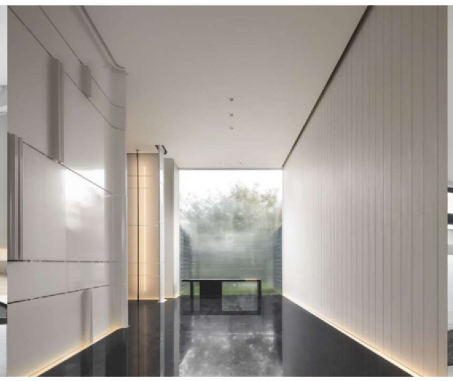



## Down 01 Series



## Down 02 Series: Cut out 55, 75, 95 mm



## Down 03 Series: Surface Mounted Downlight



## Down 04 Series: SMD Downlight



## Down 05 Series: IP54 Downlight



# Down **01 Series**











| Model No. | Watt | Control | Dimension | Cut out | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|---|
| 01055A (ONF) | 6W | NO-Dim | D60*H42 | Ø55 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 550lm |
| 01055A (TRB) | 6W | Triac | D60*H42 | Ø55 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 550lm |
| 01055A (DAB) | 6W | DALI | D60*H42 | Ø55 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 550lm |
| 01055A (DAC) | 6W | DALI | D60*H42 | Ø55 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 450lm |
| 01055A (RFC) | 6W | RF 2.4G | D60*H42 | Ø55 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 450lm |
| | | | | | | | | |
| 01075A (ONF) | 10W | NO-Dim | D80*H50 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 1050lm |
| 01075A (TRB) | 10W | Triac | D80*H50 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 1050lm |
| 01075A (DAB) | 10W | DALI | D80*H50 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 1050lm |
| 01075A (DAC) | 10W | DALI | D80*H50 | Ø75 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 850lm |
| 01075A (RFC) | 10W | RF 2.4G | D80*H50 | Ø75 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 850lm |
| | | | | | | | | |
| 01095A (ONF15) | 15W | NO-Dim | D100*H62 | Ø95 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 1500lm |
| 01095A (TRB15) | 15W | Triac | D100*H62 | Ø95 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 1500lm |
| 01095A (DAB15) | 15W | DALI | D100*H62 | Ø95 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 1100lm |
| 01095A (DAC15) | 15W | DALI | D100*H62 | Ø95 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 1100lm |
| | | | | | | | | |
| 01095A (ONF20) | 20W | NO-Dim | D100*H62 | Ø95 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 2100lm |
| 01095A (TRB20) | 20W | Triac | D100*H62 | Ø95 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 2100lm |
| 01095A (DAB20) | 20W | DALI | D100*H62 | Ø95 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 1700lm |
| 01095A (DAC20) | 20W | DALI | D100*H62 | Ø95 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 1700lm |

CE | 5 years Warranty | Flicker Free


● Input voltage: AC220~240V ● Housing color: White or Black

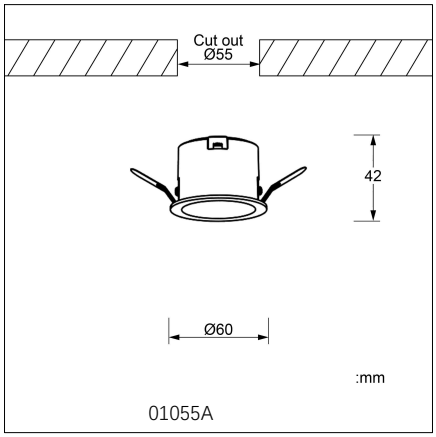

01055A

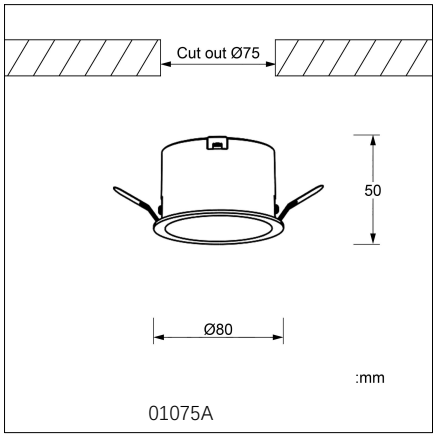

01075A

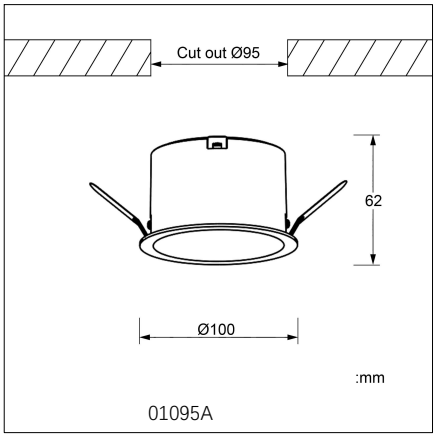

01095A


# 02 Series: Cut out 55 mm










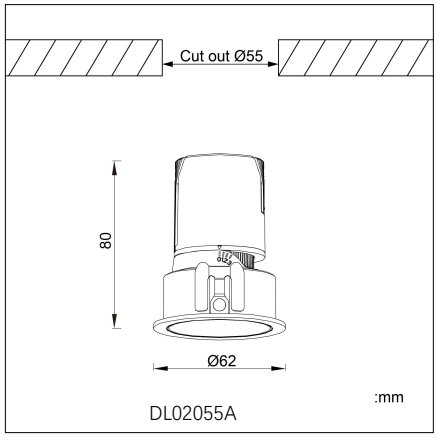


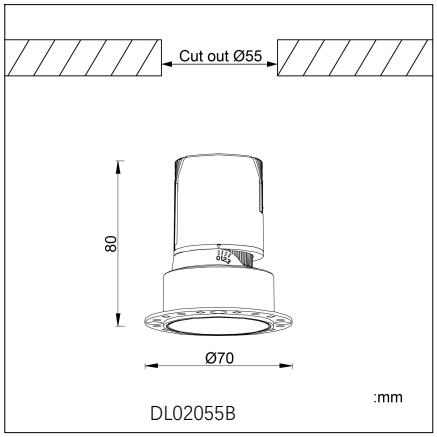
| Model No. | Watt | Control | Dimension | Cut out | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|---|
| 02055A (ONF) | 6W | NO-Dim | D62*H80 | Ø55 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 470lm |
| 02055A (TRB) | 6W | Triac | D62*H80 | Ø55 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 470lm |
| 02055A (DAB) | 6W | DALI | D62*H80 | Ø55 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 470lm |
| 02055A (DAC) | 6W | DALI | D62*H80 | Ø55 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 380lm |
| 02055A (RFC) | 6W | RF 2.4G | D62*H80 | Ø55 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 380lm |
| | | | | | | | | |
| 02055B (ONF) | 6W | NO-Dim | D70*H80 | Ø55 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 470lm |
| 02055B (TRB) | 6W | Triac | D70*H80 | Ø55 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 470lm |
| 02055B (DAB) | 6W | DALI | D70*H80 | Ø55 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 470lm |
| 02055B (DAC) | 6W | DALI | D70*H80 | Ø55 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 380lm |
| 02055B (RFC) | 6W | RF 2.4G | D70*H80 | Ø55 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 380lm |
| | | | | | | | | |
| 02055C (ONF) | 6W | NO-Dim | L62*W62*H80 | L55*W55 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 470lm |
| 02055C (TRB) | 6W | Triac | L62*W62*H80 | L55*W55 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 470lm |
| 02055C (DAB) | 6W | DALI | L62*W62*H80 | L55*W55 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 470lm |
| 02055C (DAC) | 6W | DALI | L62*W62*H80 | L55*W55 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 380lm |
| 02055C (RFC) | 6W | RF 2.4G | L62*W62*H80 | L55*W55 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 380lm |
| | | | | | | | | |
| 02055D (ONF) | 6W | NO-Dim | L70*W70*H80 | L55*W55 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 470lm |
| 02055D (TRB) | 6W | Triac | L70*W70*H80 | L55*W55 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 470lm |
| 02055D (DAB) | 6W | DALI | L70*W70*H80 | L55*W55 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 470lm |
| 02055D (DAC) | 6W | DALI | L70*W70*H80 | L55*W55 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 380lm |
| 02055D (RFC) | 6W | RF 2.4G | L70*W70*H80 | L55*W55 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 380lm |

CE 5 years Warranty Flicker Free

● Input voltage: AC220~240V ● Housing color: White or Black

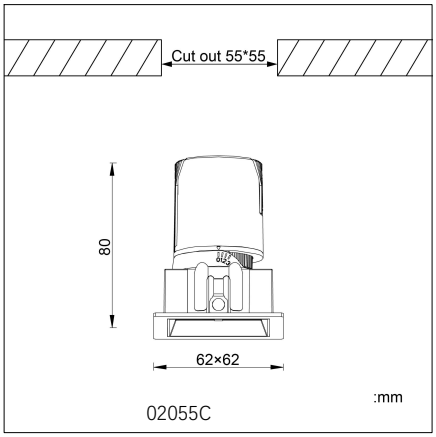

02055C

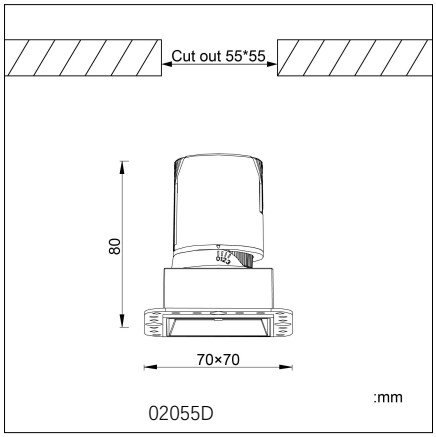

02055D


# 02 Series: Cut out 75 mm










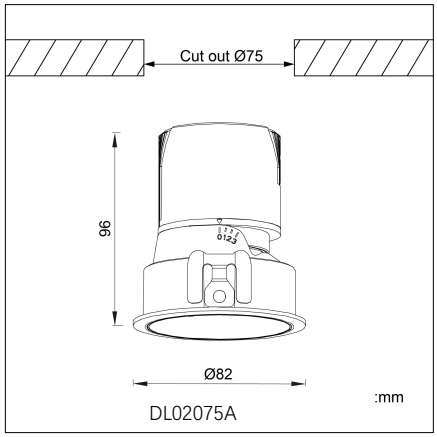


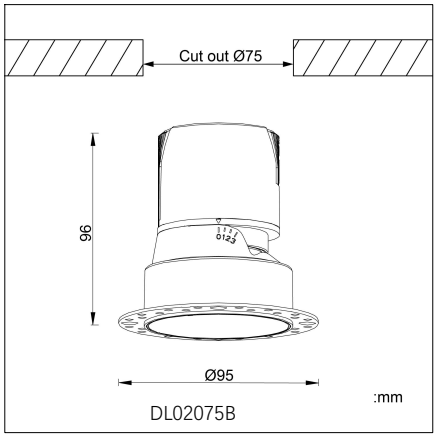
| Model No. | Watt | Control | Dimension | Cut out | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|---|
| 02075A (ONF) | 10W | NO-Dim | D82*H96 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 900lm |
| 02075A (TRB) | 10W | Triac | D82*H96 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 900lm |
| 02075A (DAB) | 10W | DALI | D82*H96 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 900lm |
| 02075A (DAC) | 10W | DALI | D82*H96 | Ø75 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 720lm |
| 02075A (RFC) | 10W | RF 2.4G | D82*H96 | Ø75 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 720lm |
| | | | | | | | | |
| 02075B (ONF) | 10W | NO-Dim | D95*H96 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 900lm |
| 02075B (TRB) | 10W | Triac | D95*H96 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 900lm |
| 02075B (DAB) | 10W | DALI | D95*H96 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 900lm |
| 02075B (DAC) | 10W | DALI | D95*H96 | Ø75 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 720lm |
| 02075B (RFC) | 10W | RF 2.4G | D95*H96 | Ø75 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 720lm |
| | | | | | | | | |
| 02075C (ONF) | 10W | NO-Dim | L82*W82*H96 | L75*W75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 900lm |
| 02075C (TRB) | 10W | Triac | L82*W82*H96 | L75*W75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 900lm |
| 02075C (DAB) | 10W | DALI | L82*W82*H96 | L75*W75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 900lm |
| 02075C (DAC) | 10W | DALI | L82*W82*H96 | L75*W75 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 720lm |
| 02075C (RFC) | 10W | RF 2.4G | L82*W82*H96 | L75*W75 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 720lm |
| | | | | | | | | |
| 02075D (ONF) | 10W | NO-Dim | L95*W95*H96 | L75*W75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 900lm |
| 02075D (TRB) | 10W | Triac | L95*W95*H96 | L75*W75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 900lm |
| 02075D (DAB) | 10W | DALI | L95*W95*H96 | L75*W75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 900lm |
| 02075D (DAC) | 10W | DALI | L95*W95*H96 | L75*W75 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 720lm |
| 02075D (RFC) | 10W | RF 2.4G | L95*W95*H96 | L75*W75 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 720lm |

CE | 5 years Warranty | Flicker Free

● Input voltage: AC220~240V ● Housing color: White or Black

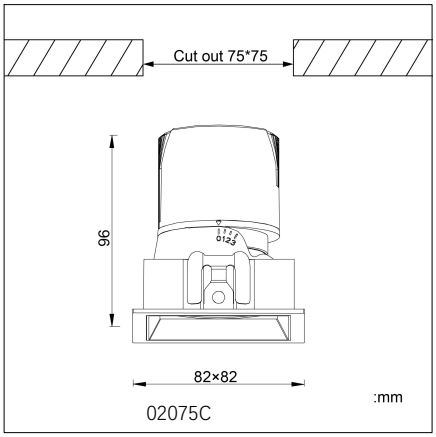

02075C

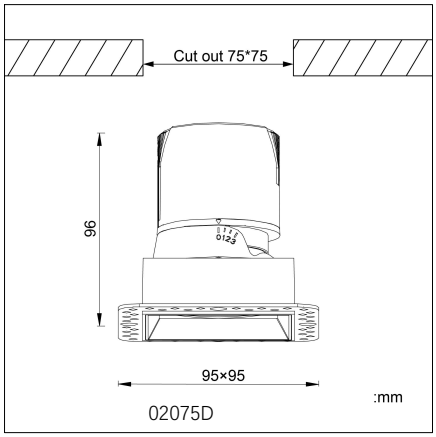

02075D

# 02 Series: Cut out 75 mm








| Model No. | Watt | Control | Dimension | Cut out | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|---|
| 02075E (ONF) | 10W | NO-Dim | D85*H89 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | lm |
| 02075E (TRB) | 10W | Triac | D85*H89 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | lm |
| 02075E (DAB) | 10W | DALI | D85*H89 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | lm |
| 02075E (DAC) | 10W | DALI | D85*H89 | Ø75 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | lm |
| 02075E (RFC) | 10W | RF 2.4G | D85*H89 | Ø75 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | lm |
| | | | | | | | | |
| 02075F (ONF) | 10W | NO-Dim | D82*H106 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | lm |
| 02075F (TRB) | 10W | Triac | D82*H106 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | lm |
| 02075F (DAB) | 10W | DALI | D82*H106 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | lm |
| 02075F (DAC) | 10W | DALI | D82*H106 | Ø75 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | lm |
| 02075F (RFC) | 10W | RF 2.4G | D82*H106 | Ø75 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | lm |
| | | | | | | | | |
| 02075G (ONF) | 10W | NO-Dim | D82*H106 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | lm |
| 02075G (TRB) | 10W | Triac | D82*H106 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | lm |
| 02075G (DAB) | 10W | DALI | D82*H106 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | lm |
| 02075G (DAC) | 10W | DALI | D82*H106 | Ø75 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | lm |
| 02075G (RFC) | 10W | RF 2.4G | D82*H106 | Ø75 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | lm |
| | | | | | | | | |
| 02075H (ONF) | 10W | NO-Dim | D100*H89 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | lm |
| 02075H (TRB) | 10W | Triac | D100*H89 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | lm |
| 02075H (DAB) | 10W | DALI | D100*H89 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | lm |
| 02075H (DAC) | 10W | DALI | D100*H89 | Ø75 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | lm |
| 02075H (RFC) | 10W | RF 2.4G | D100*H89 | Ø75 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | lm |
| | | | | | | | | |
| 02075I (ONF) | 10W | NO-Dim | D95*H106 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | lm |
| 02075I (TRB) | 10W | Triac | D95*H106 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | lm |
| 02075I (DAB) | 10W | DALI | D95*H106 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | lm |
| 02075I (DAC) | 10W | DALI | D95*H106 | Ø75 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | lm |
| 02075I (RFC) | 10W | RF 2.4G | D95*H106 | Ø75 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | lm |
| | | | | | | | | |
| 02075J (ONF) | 10W | NO-Dim | D95*H106 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | lm |
| 02075J (TRB) | 10W | Triac | D95*H106 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | lm |
| 02075J (DAB) | 10W | DALI | D95*H106 | Ø75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | lm |
| 02075J (DAC) | 10W | DALI | D95*H106 | Ø75 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | lm |
| 02075J (RFC) | 10W | RF 2.4G | D95*H106 | Ø75 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | lm |

CE 5 years Warranty Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black

# 02 Series: Cut out 95 mm










| Model No. | Watt | Control | Dimension | Cut out | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|---|
| 02095A (ONF) | 20W | NO-Dim | D105*H119 | Ø95 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 2200lm |
| 02095A (TRB) | 20W | Triac | D105*H119 | Ø95 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 2200lm |
| 02095A (DAB) | 20W | DALI | D105*H119 | Ø95 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 2200lm |
| 02095A (DAC) | 20W | DALI | D105*H119 | Ø95 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 2200lm |
| | | | | | | | | |
| 02095B (ONF) | 20W | NO-Dim | D120*H119 | Ø95 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 2200lm |
| 02095B (TRB) | 20W | Triac | D120*H119 | Ø95 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 2200lm |
| 02095B (DAB) | 20W | DALI | D120*H119 | Ø95 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 2200lm |
| 02095B (DAC) | 20W | DALI | D120*H119 | Ø95 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 2200lm |
| | | | | | | | | |
| 02095C (ONF) | 20W | NO-Dim | L105*W105*H119 | L95*W95 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 2200lm |
| 02095C (TRB) | 20W | Triac | L105*W105*H119 | L95*W95 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 2200lm |
| 02095C (DAB) | 20W | DALI | L105*W105*H119 | L95*W95 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 2200lm |
| 02095C (DAC) | 20W | DALI | L105*W105*H119 | L95*W95 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 2200lm |
| | | | | | | | | |
| 02095D (ONF) | 20W | NO-Dim | L120*W120*H119 | L95*W95 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 2200lm |
| 02095D (TRB) | 20W | Triac | L120*W120*H119 | L95*W95 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 2200lm |
| 02095D (DAB) | 20W | DALI | L120*W120*H119 | L95*W95 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 2200lm |
| 02095D (DAC) | 20W | DALI | L120*W120*H119 | L95*W95 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 2200lm |

CE | 5 years Warranty | Flicker Free

● Input voltage: AC220~240V ● Housing color: White or Black

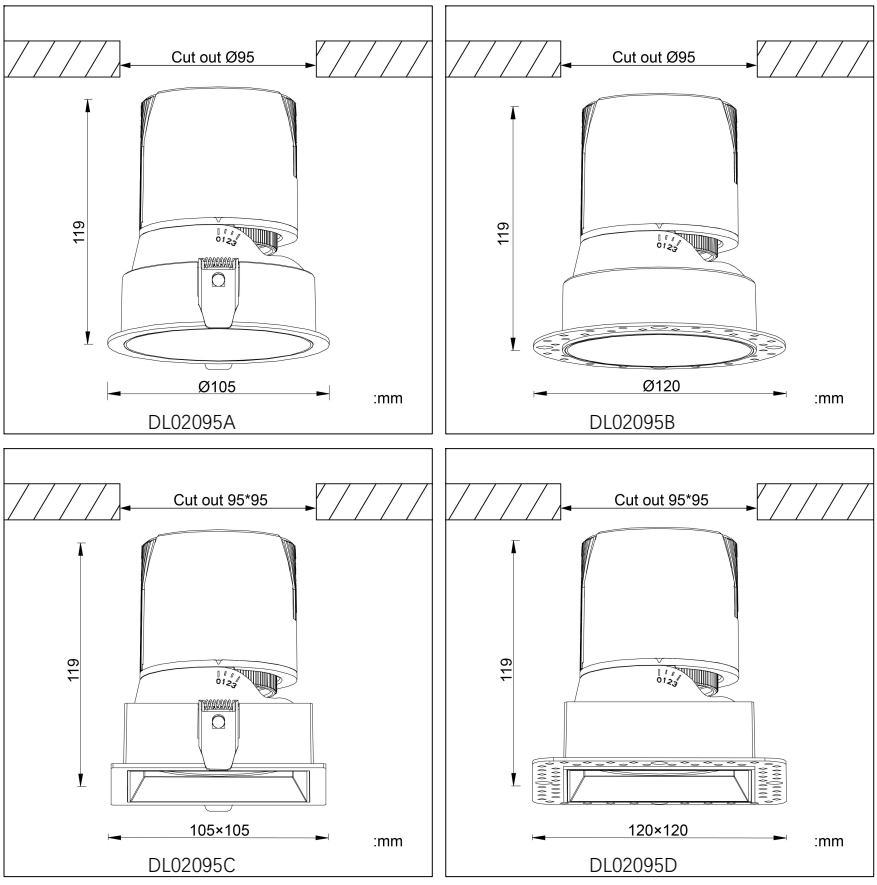


# 02 Series: 2 LED






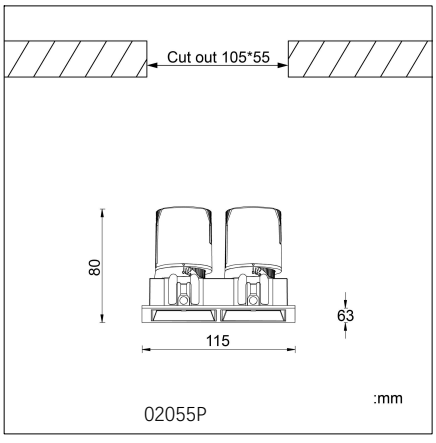




02055P

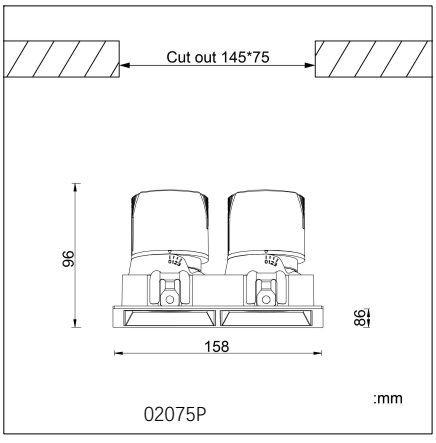



02075P

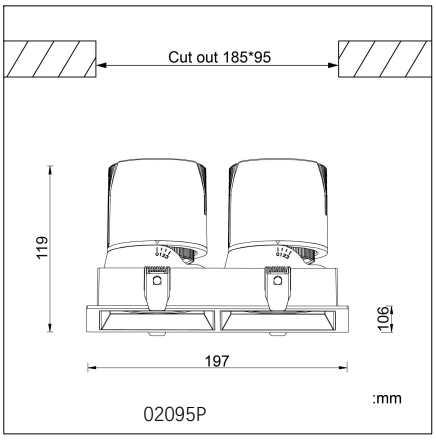



02095P

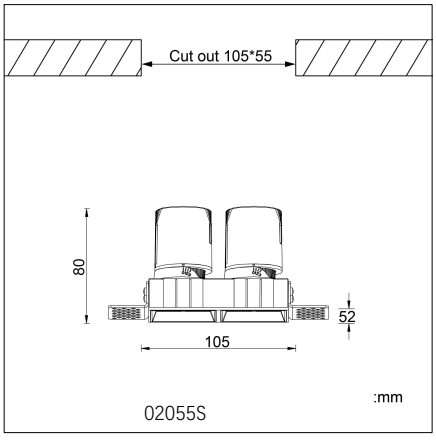


02055S

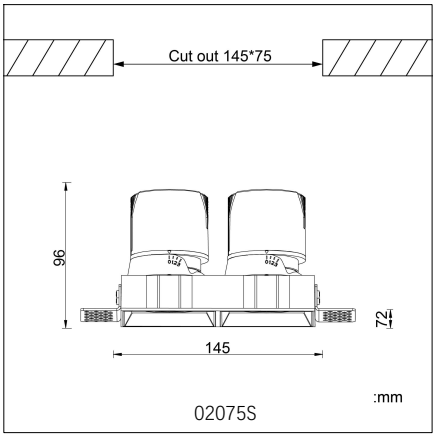


02075S

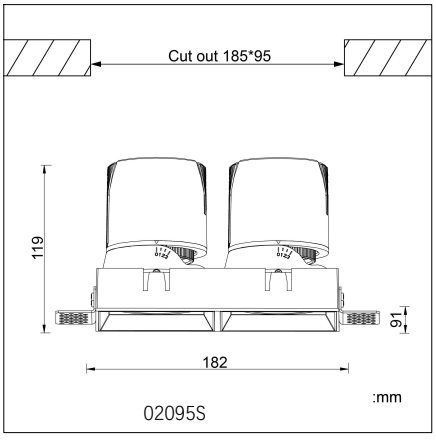


02095S

| Model No. | Watt | Control | Dimension | Cut out | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|---|
| 02055P (ONF) | 6W*2 | NO-Dim | L115*W63*H80 | L105*W55 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 940lm |
| 02055P (TRB) | 6W*2 | Triac | L115*W63*H80 | L105*W55 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 940lm |
| 02055P (DAB) | 6W*2 | DALI | L115*W63*H80 | L105*W55 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 940lm |
| 02055P (DAC) | 6W*2 | DALI | L115*W63*H80 | L105*W55 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 760lm |
| | | | | | | | | |
| 02055S (ONF) | 6W*3 | NO-Dim | L105*W52*H80 | L105*W55 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 940lm |
| 02055S (TRB) | 6W*3 | Triac | L105*W52*H80 | L105*W55 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 940lm |
| 02055S (DAB) | 6W*3 | DALI | L105*W52*H80 | L105*W55 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 940lm |
| 02055S (DAC) | 6W*3 | DALI | L105*W52*H80 | L105*W55 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 760lm |
| | | | | | | | | |
| 02075P (ONF) | 10W*2 | NO-Dim | L158*W86*H96 | L145*W75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 1800lm |
| 02075P (TRB) | 10W*2 | Triac | L158*W86*H96 | L145*W75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 1800lm |
| 02075P (DAB) | 10W*2 | DALI | L158*W86*H96 | L145*W75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 1800lm |
| 02075P (DAC) | 10W*2 | DALI | L158*W86*H96 | L145*W75 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 1450lm |
| | | | | | | | | |
| 02075S (ONF) | 10W*2 | NO-Dim | L145*W72*H96 | L145*W75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 1800lm |
| 02075S (TRB) | 10W*2 | Triac | L145*W72*H96 | L145*W75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 1800lm |
| 02075S (DAB) | 10W*2 | DALI | L145*W72*H96 | L145*W75 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 1800lm |
| 02075S (DAC) | 10W*2 | DALI | L145*W72*H96 | L145*W75 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 1450lm |
| | | | | | | | | |
| 02095P (ONF) | 20W*2 | NO-Dim | L197*W106*H119 | L185*W95 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 4000lm |
| 02095P (TRB) | 20W*2 | Triac | L197*W106*H119 | L185*W95 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 4000lm |
| 02095P (DAB) | 20W*2 | DALI | L197*W106*H119 | L185*W95 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 4000lm |
| 02095P (DAC) | 20W*2 | DALI | L197*W106*H119 | L185*W95 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 3200lm |
| | | | | | | | | |
| 02095S (ONF) | 20W*2 | NO-Dim | L182*W91*H119 | L185*W95 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 4000lm |
| 02095S (TRB) | 20W*2 | Triac | L182*W91*H119 | L185*W95 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 4000lm |
| 02095S (DAB) | 20W*2 | DALI | L182*W91*H119 | L185*W95 mm | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 4000lm |
| 02095S (DAC) | 20W*2 | DALI | L182*W91*H119 | L185*W95 mm | 15°/24°/36°/50° | 2700~5700K | Ra90 | 3200lm |

CE 5 years Warranty Flicker Free

- Input voltage: AC220~240V
- Housing color: White or Black


# 03 Series: Surface Mounted Downlight




| Model No. | Watt | Control | Dimension | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|
| 03075A (ONF) | 10W | NO-Dim | D75*H90 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 1100lm |
| 03075A (TRB) | 10W | Triac | D75*H90 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 1100lm |
| 03075A (DAB) | 10W | DALI | D75*H90 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 1100lm |
| | | | | | | | |
| 03091A (ONF) | 15W | NO-Dim | D91*H112 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 1600lm |
| 03091A (TRB) | 15W | Triac | D91*H112 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 1600lm |
| 03091A (DAB) | 15W | DALI | D91*H112 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 1600lm |
| | | | | | | | |
| 03128A (ONF) | 25W | NO-Dim | D128*H137 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 2600lm |
| 03128A (TRB) | 25W | Triac | D128*H137 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 2600lm |
| 03128A (DAB) | 25W | DALI | D128*H137 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 2600lm |
| | | | | | | | |
| 03128A (ONF) | 30W | NO-Dim | D128*H137 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 3100lm |
| 03128A (TRB) | 30W | Triac | D128*H137 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 3100lm |
| 03128A (DAB) | 30W | DALI | D128*H137 | 15°/24°/36°/50° | 27/30/35/4000K | Ra90 | 3100lm |

CE | 5 years Warranty | Flicker Free


● Input voltage: AC220~240V ● Housing color: White or Black

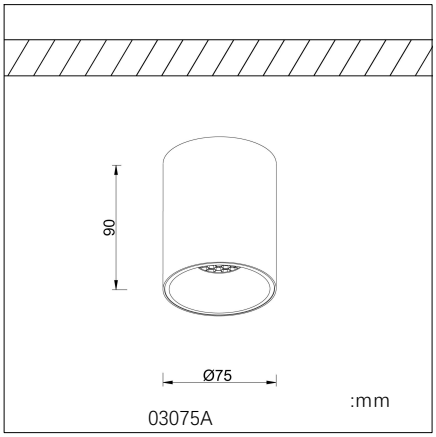

03075A

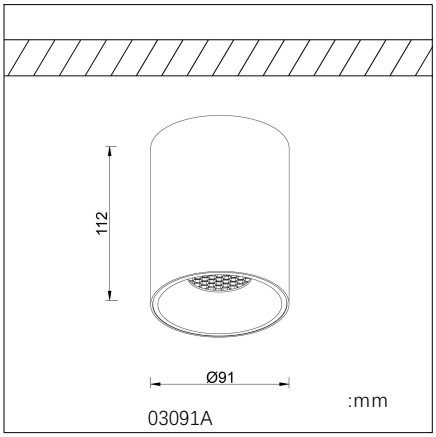

03091A

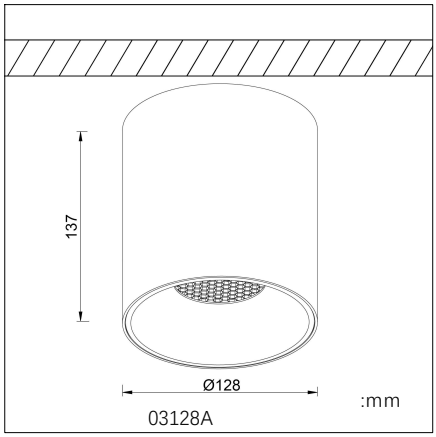

03128A

# 04 Series:　OSRAM SMD Downlight









| Model No. | Watt | Control | Dimension | Cut out | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|---|
| 04125A (ONF) | 15W | NO-Dim | D145*H49 | Ø125~130 mm | 95° | 30/40/50/5700K | Ra90 | 1500lm |
| 04125A (TRB) | 15W | Triac | D145*H49 | Ø125~130 mm | 95° | 30/40/50/5700K | Ra90 | 1500lm |
| 04125A (DAB) | 15W | DALI | D145*H49 | Ø125~130 mm | 95° | 30/40/50/5700K | Ra90 | 1500lm |
| 04125A (10V) | 15W | 1-10V Knob | D145*H49 | Ø125~130 mm | 95° | 30/40/50/5700K | Ra90 | 1500lm |
| | | | | | | | | |
| 04160A (ONF) | 25W | NO-Dim | D180*H57 | Ø160~165 mm | 95° | 30/40/50/5700K | Ra90 | 2500lm |
| 04160A (TRB) | 25W | Triac | D180*H57 | Ø160~165 mm | 95° | 30/40/50/5700K | Ra90 | 2500lm |
| 04160A (DAB) | 25W | DALI | D180*H57 | Ø160~165 mm | 95° | 30/40/50/5700K | Ra90 | 2500lm |
| 04160A (10V) | 25W | 1-10V Knob | D180*H57 | Ø160~165 mm | 95° | 30/40/50/5700K | Ra90 | 2500lm |
| | | | | | | | | |
| 04200A (ONF) | 35W | NO-Dim | D230*H62 | Ø200~210 mm | 95° | 30/40/50/5700K | Ra90 | 3500lm |
| 04200A (TRB) | 35W | Triac | D230*H62 | Ø200~210 mm | 95° | 30/40/50/5700K | Ra90 | 3500lm |
| 04200A (DAB) | 35W | DALI | D230*H62 | Ø200~210 mm | 95° | 30/40/50/5700K | Ra90 | 3500lm |
| 04200A (10V) | 35W | 1-10V Knob | D230*H62 | Ø200~210 mm | 95° | 30/40/50/5700K | Ra90 | 3500lm |

CE 5 years Warranty Flicker Free


● Input voltage: AC220~240V ● Housing color: White or Black

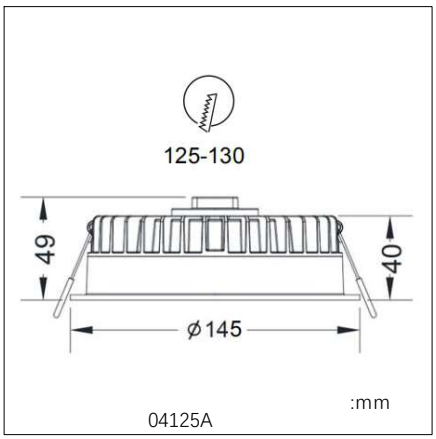

04125A

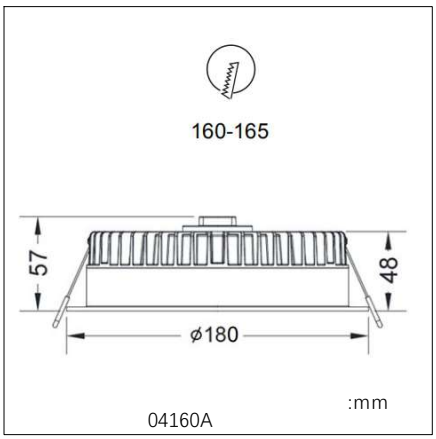

04160A

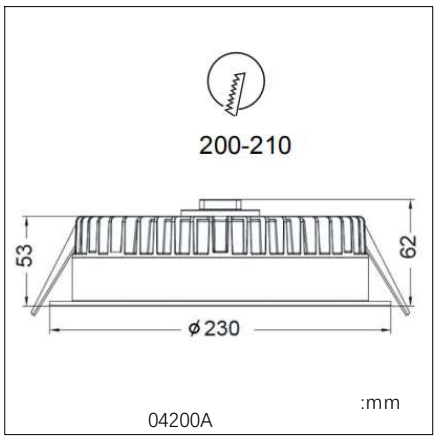



04200A


# 05 Series: A Type







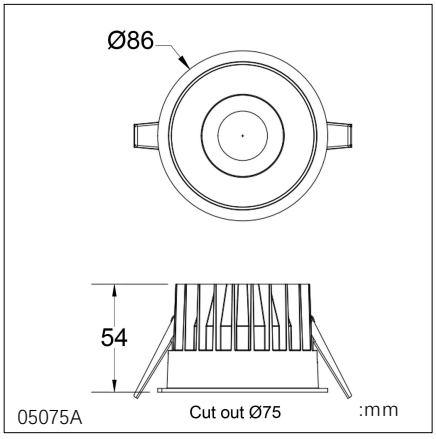


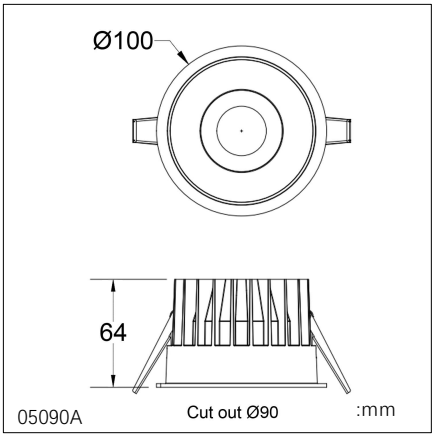
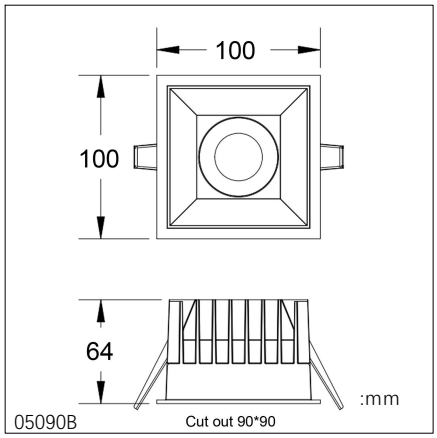
| Model No. | Watt | Control | Dimension | Cut out | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|---|
| 05075A (ONF) | 10W | NO-Dim | D86*H54 | Ø75 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 860lm |
| 05075A (TRB) | 10W | Triac | D86*H54 | Ø75 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 860lm |
| 05075A (DAB) | 10W | DALI | D86*H54 | Ø75 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 860lm |
| 05075A (DAC) | 10W | DALI | D86*H54 | Ø75 mm | 15°/24°/38°/60° | 2700~5700K | Ra90 | 800lm |
| 05075A (IP54) | 10W | NO-Dim | D86*H54 | Ø75 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 860lm |
| | | | | | | | | |
| 05090A (ONF) | 15W | NO-Dim | D100*H64 | Ø90 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 1300lm |
| 05090A (TRB) | 15W | Triac | D100*H64 | Ø90 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 1300lm |
| 05090A (DAB) | 15W | DALI | D100*H64 | Ø90 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 1300lm |
| 05090A (DAC) | 15W | DALI | D100*H64 | Ø90 mm | 15°/24°/38°/60° | 2700~5700K | Ra90 | 1200lm |
| 05090A (IP54) | 10W | NO-Dim | D100*H64 | Ø90 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 860lm |
| | | | | | | | | |
| 05125A (ONF) | 25W | NO-Dim | D136*H83 | Ø125 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 2300lm |
| 05125A (TRB) | 25W | Triac | D136*H83 | Ø125 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 2300lm |
| 05125A (DAB) | 25W | DALI | D136*H83 | Ø125 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 2300lm |
| 05125A (DAC) | 25W | DALI | D136*H83 | Ø125 mm | 15°/24°/38°/60° | 2700~5700K | Ra90 | 2000lm |
| 05125A (IP54) | 20W | NO-Dim | D136*H83 | Ø125 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 1900lm |
| | | | | | | | | |
| 05145A (ONF) | 35W | NO-Dim | D158*H96 | Ø145 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 3200lm |
| 05145A (TRB) | 35W | Triac | D158*H96 | Ø145 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 3200lm |
| 05145A (DAB) | 35W | DALI | D158*H96 | Ø145 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 3200lm |
| 05145A (DAC) | 35W | DALI | D158*H96 | Ø145 mm | 15°/24°/38°/60° | 2700~5700K | Ra90 | 2800lm |
| 05145A (IP54) | 30W | NO-Dim | D158*H96 | Ø145 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 2800lm |
| | | | | | | | | |
| 05165A (ONF) | 45W | NO-Dim | D180*H109 | Ø165 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 3800lm |
| 05165A (TRB) | 45W | Triac | D180*H109 | Ø165 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 3800lm |
| 05165A (DAB) | 45W | DALI | D180*H109 | Ø165 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 3800lm |
| 05165A (DAC) | 45W | DALI | D180*H109 | Ø165 mm | 15°/24°/38°/60° | 2700~5700K | Ra90 | 3400lm |
| 05165A (IP54) | 30W | NO-Dim | D180*H109 | Ø165 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 2800lm |

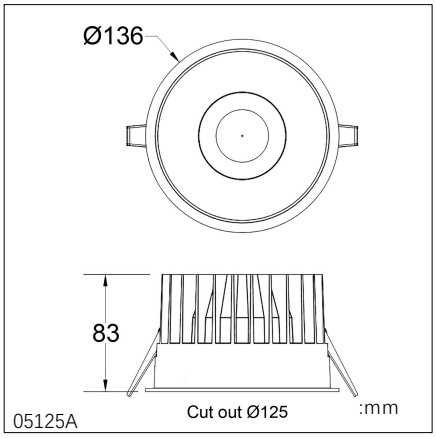
CE 5 years Warranty Flicker Free

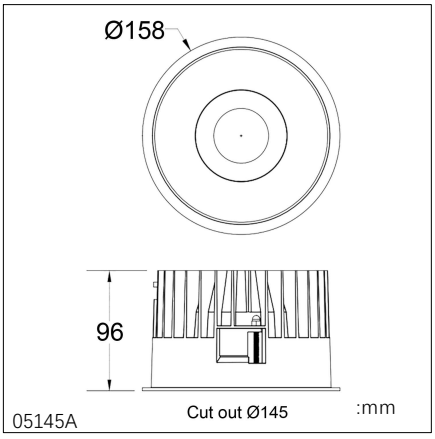
- Input voltage: AC220~240V
- Housing color: White or Black

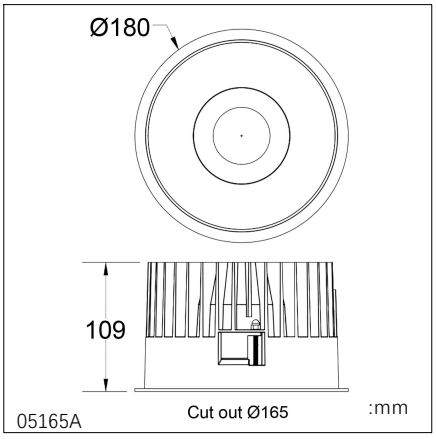
# 05 Series: B Type

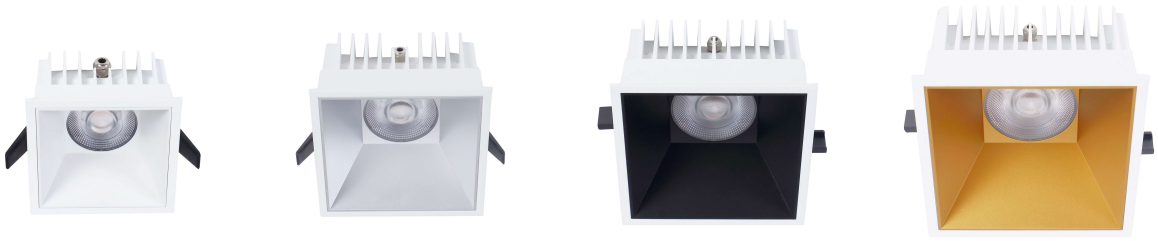





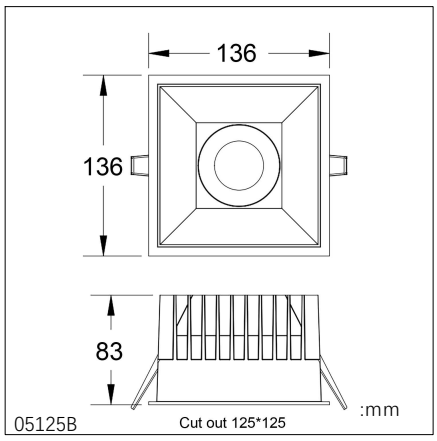


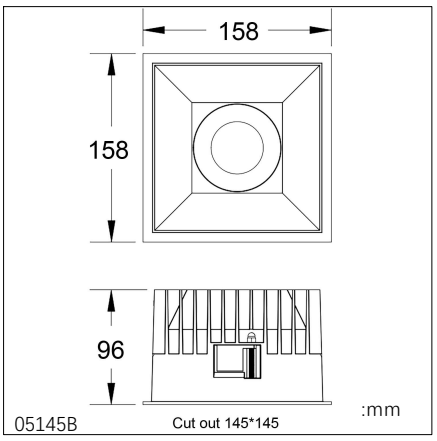
| Model No. | Watt | Control | Dimension | Cut out | Beam angle | Color temp. | CRI | Lumen |
|---|---|---|---|---|---|---|---|---|
| 05090B (ONF) | 15W | NO-Dim | L100*W100*H64 | L90*W90 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 1300lm |
| 05090B (TRB) | 15W | Triac | L100*W100*H64 | L90*W90 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 1300lm |
| 05090B (DAB) | 15W | DALI | L100*W100*H64 | L90*W90 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 1300lm |
| 05090B (DAC) | 15W | DALI | L100*W100*H64 | L90*W90 mm | 15°/24°/38°/60° | 2700~5700K | Ra90 | 1200lm |
| 05090B (IP54) | 10W | NO-Dim | L100*W100*H64 | L90*W90 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 860lm |
| | | | | | | | | |
| 05125B (ONF) | 25W | NO-Dim | L136*W136*H83 | L125*W125 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 2300lm |
| 05125B (TRB) | 25W | Triac | L136*W136*H83 | L125*W125 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 2300lm |
| 05125B (DAB) | 25W | DALI | L136*W136*H83 | L125*W125 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 2300lm |
| 05125B (DAC) | 25W | DALI | L136*W136*H83 | L125*W125 mm | 15°/24°/38°/60° | 2700~5700K | Ra90 | 2000lm |
| 05125B (IP54) | 20W | NO-Dim | L136*W136*H83 | L125*W125 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 1900lm |
| | | | | | | | | |
| 05145B (ONF) | 35W | NO-Dim | L158*W158*H96 | L145*W145 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 3200lm |
| 05145B (TRB) | 35W | Triac | L158*W158*H96 | L145*W145 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 3200lm |
| 05145B (DAB) | 35W | DALI | L158*W158*H96 | L145*W145 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 3200lm |
| 05145B (DAC) | 35W | DALI | L158*W158*H96 | L145*W145 mm | 15°/24°/38°/60° | 2700~5700K | Ra90 | 2800lm |
| 05145B (IP54) | 30W | NO-Dim | L158*W158*H96 | L145*W145 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 2800lm |
| | | | | | | | | |
| 05165B (ONF) | 45W | NO-Dim | L180*W180*H109 | L165*W165 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 3800lm |
| 05165B (TRB) | 45W | Triac | L180*W180*H109 | L165*W165 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 3800lm |
| 05165B (DAB) | 45W | DALI | L180*W180*H109 | L165*W165 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 3800lm |
| 05165B (DAC) | 45W | DALI | L180*W180*H109 | L165*W165 mm | 15°/24°/38°/60° | 2700~5700K | Ra90 | 3400lm |
| 05165B (IP54) | 30W | NO-Dim | L180*W180*H109 | L165*W165 mm | 15°/24°/38°/60° | 27/30/35/4000K | Ra90 | 2800lm |

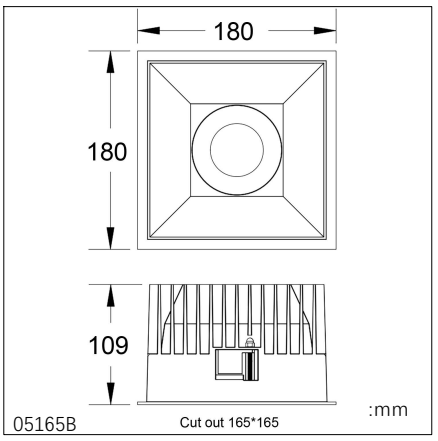



- Input voltage: AC220~240V
- Housing color: White or Black

# Track Lighting Accessories
# 4-Wire (3-Phase) Track And Connectors

| 4-wire (3-Phase) | Track | Live power connector/ End for track | I-coupler inner type | I-coupler external type | L-coupler Left side | L-coupler Right side | L-coupler Rotative | L-coupler Flexible |
|---|---|---|---|---|---|---|---|---|
| |  |  |  |  |  |  |  |  |
| |  |  |  |  |  |  |  |  |

| Model NO. | T410 (1.0 meter) HYR-T415 (1.5 meter) HYR-T420 (2.0 meter) | 461L+(end cap) 461R +(end cap) | 467 | 462 | 463L | 463R | 468 | 469 |
|---|---|---|---|---|---|---|---|---|

| 4-wire (3-Phase) | T-coupler Left side-1 | T-coupler Left side-2 | T-coupler Right side-1 | T-coupler Right side-2 | X-coupler | Suspension track connections fixed kit | Suspension mounted kit wire length 1.5M | Ceiling mounted kit | Surface Mounted Track Base |
|---|---|---|---|---|---|---|---|---|---|
| |  |  |  |  |  |  |  |  |  |
| |  |  |  |  |  |  |  | | 4 wire or 3 wire |

| Model NO. | 464L1 | 464L2 | 464R1 | 464R2 | 465 | 494 | 491 | 495 | 3M |
|---|---|---|---|---|---|---|---|---|---|


● Input voltage: AC220~240V ● Housing color: White or Black



401 adapter










402 adapter



GLOBAL adapter


# 3-Wire/ 2-Wire (1-Phase) Track




| 3-wire/ 2-wire (1-Phase) | Track | Live power connector/ End for track | I-coupler inner type/ external type | L-coupler Left side | L-coupler Right side | L-coupler Rotative |
|---|---|---|---|---|---|---|
| |  |  |  |  |  |  |
| 3-wire Model NO. | T310 (1.0 meter) HYR-<br>T315 (1.5 meter) HYR-<br>T320 (2.0 meter) | 361L+(end cap) 361R<br>+(end cap) | 367 (inner)<br>362 (external) | 363L | 363R | 369 |
| 2-wire Model NO. | T210 (1.0 meter) HYR-<br>T215 (1.5 meter) HYR-<br>T220 (2.0 meter) | 261L<br>261R<br>266 (End cap) | 267 (inner)<br>262 (external) | 263L | 263R | 269 |

| 3-wire/2-wire (1-Phase) | T-coupler Left side-1 | T-coupler Left side-2 | T-coupler Right side-1 | T-coupler Right side-2 | X-coupler | Ceiling mounted kit | Suspension mounted kit wire length 1.5M | Adapter 3 wire 2 wire | Adapter 4-wire |
|---|---|---|---|---|---|---|---|---|---|
| |  |  |  |  |  |  |  |  |  |
| 3-wire Model NO. | 364L1 | 364L2 | 364R1 | 364R2 | 365 | 392 | 391 | 301 | 401 |
| 2-wire Model NO. | 264L1 | 264L2 | 264R1 | 264R2 | 265 | 292 | 291 | 201 | |

- Input voltage: AC220~240V
- Housing color: White or Black


# Track Lighting Accessories
# DALI 6-Wire(3-Phase) Track And Connectors

| 6-wire (3-Phase) | Track | Live power connector +end cap | I-coupler inner type | I-coupler external type | L-coupler Left side | L-coupler Right side | L-coupler Flexible |
|---|---|---|---|---|---|---|---|
| |  |  |  |  |  |  |  |
| Model NO. | 0610 (1.0 meter) 0615 (1.5 meter) 0620 (2.0 meter) | D631L+(end cap D632) HYR-D631R+(end cap D632) | D633 | D634 | D635L | D635R | D639 |

| 6-wire (3-Phase) | T-coupler Left side-1<br>T-coupler Left side-2<br>T-coupler Right side-1<br>T-coupler Right side-2 | X-coupler | Connections fixed kit for suspension track | Suspension mounted kit wire length 1.5M | 6 wire Recessed type 4-wire (3-Phase) Track | 6 wire Recessed type connectors cover |
|---|---|---|---|---|---|---|
| |  |  |  |  |  |  |
| Model NO. | D636L1<br>D636L2<br>D636R1<br>D636R2 | D637 | 494<br>(the same with 4 wires) | 491<br>(the same with 4 wires) | R610 (1.0 meter) HYR-R620 (2.0 meter) | R631 for live power HYR-<br>R434 for external HYR-<br>R435 for L<br>R436 for T<br>R437 for X |

- Input voltage: AC220~240V
- Housing color: White or Black

# Installation Of 4/6-Wire (3-Phase) Track

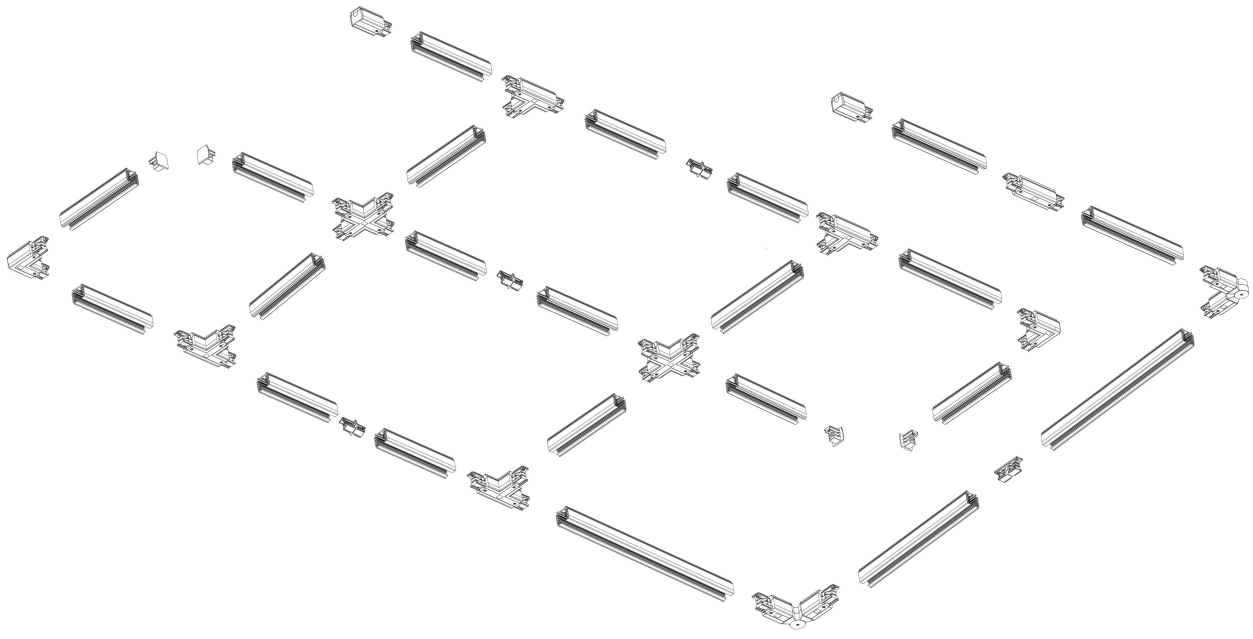

# Control System
# DALI Systerm Control Gear

| Picture | Model No. | Features | Description |
|---|---|---|---|
|  | REI D101A | **DALI Dimmer+Bus Power**<br>Built-in 100mA DALI bus power.<br>Tunable White+<br>Brightness Dimming | DALI Dimmer+Bus Power<br>- built-in 100mA DALI bus power under AC mains.<br>- on/off, brightness dimmable and tunable white control.<br>- standard size design.<br>- can be powered by DALI bus while not connected with AC mains. |
|  | REI D102A | **DALI Keypad A**<br>Tunable White+<br>Brightness Dimming | DALI Keypad A<br>- 8 keys, power supplied by DALI bus.<br>- on/off, brightness dimmable and tunable white control.<br>- can set 2 scenes, standard size, easy installation. |
|  | REI D103A | **DALI Keypad B**<br>Tunable White+<br>Brightness Dimming | DALI Keypad B<br>- 8 keys, power supplied by DALI bus.<br>- on/off, brightness dimmable and tunable white control.<br>- can set 2 scenes, standard size, easy installation. |
|  | REI D101B | **DALI Dimmer+Bus Power**<br>Brightness Dimming Only | DALI Dimmer+Bus Power<br>- built-in 100mA DALI bus power under AC mains.<br>- on/off, brightness dimmable only<br>- standard size design.<br>- can be powered by DALI bus while not connected with AC mains. |
|  | REI D102B | **DALI Keypad A**<br>Brightness Dimming Only | DALI Keypad A<br>- 8 keys, power supplied by DALI bus.<br>- on/off, brightness dimmable only.<br>- can set 4 scenes, standard size, easy installation. |
|  | REI D103B | **DALI Keypad B**<br>Brightness Dimming Only | DALI Keypad B<br>- 8 keys, power supplied by DALI bus.<br>- on/off, brightness dimmable only.<br>- can set 4 scenes, standard size, easy installation. |
|  | REI D105 | **DALI Bus Power Supply** | DALI Bus Power Supply<br>- max. output current 250mA for DALI bus.<br>- DIN RAIL installation. |
|  | REI D106 | **DALI Phase Dimmer** | DALI Phase Dimmer<br>- AC-AC, 4 channels output, Triac dimmable and mosfet dimmable, Forward-phase and reverse-phase, Minimum brightness setting, DIN RAIL installation. |
|  | REI D108 | **DALI Relay Module+<br>DALI to 0/1-10V Converter** | DALI Relay Module + DALI to 0/1-10V Converter<br>-Powered by DALI bus, Capacitive/Resistive loads, DALI bus consumption: 3mA<br>-Max. load AC200-240V LED 300W / incandescent and halogen 1000W.<br>-Output 0/1-10V current 10mA for 0/1-10V LED driver 1mA/piece, Max capacity 10pcs. |
|  | REI D109 | **DALI+<br>Push AC Phase Cut Dimmer<br>200W** | DALI+Push AC Phase Cut Dimmer 200W<br>-AC100-240VAC, DALI consumption 2 mA<br>-Compatible Load Types Triac Dimmable LED lamps 220-240V 200W |
|  | REI D110A | **4 Group DT8 DALI<br>CCT Dual Color Touch<br>Controller** | 4 Group DT8 DALI CCT Dual Color Touch Controller<br>-Built-in 100mA DALI bus power under AC mains<br>-Powered by DALI bus while not connected to AC mains.<br>-DALI consumption 4 mA |
|  | REI D110B | **4 Group DT6 DALI<br>DIM Single Color Touch<br>Controller** | 4 Group DT6 DALI DIM Single Color Touch Controller<br>-Built-in 100mA DALI bus power under AC mains<br>-Powered by DALI bus while not connected to AC mains.<br>-DALI consumption 4 mA |
|  | REI D111 | **Mini DALI Power Supply<br>100mA** | Mini DALI Power Supply 100mA<br>-AC100-240VAC, Mini DALI power supply, max. 100mA output<br>-Match all DALI system in the market<br>-Mini size, easy installation into existing wall boxes |

# Remote Control RF 2.4G Wireless

| Picture | Model No. | Description |
|---|---|---|
|  | REI J101 | Model: REI J101<br>Control: 1 Zone Tunable White+Brightness Dimming, 0.1%~100% smooth dimming<br>Working voltage: 3VDC by CR2032 battery<br>Connection: RF 2.4G Wireless, 30m remote distance from controller to LED light. No limit to the number of lights. |
|  | REI J102-1 | Model: REI J102-1<br>Control: 4 Zone Tunable White+Brightness Dimming, 0.1%~100% smooth dimming<br>Working voltage: 3VDC by 2 pcs AAA battery<br>Connection: RF 2.4G Wireless, 30m remote distance from controller to LED light. No limit to the number of lights. |
|  | REI J102-2 | Model: REI J102-2<br>Control: 4 Zone Tunable White+Brightness Dimming, 0.1%~100% smooth dimming<br>Working voltage: 100-240VAC input<br>Connection: RF 2.4G Wireless, 30m remote distance from controller to LED light. No limit to the number of lights. |
|  | REI J102-3 | Model: REI J102-3<br>Control: 4 Zone Brightness Dimming, 0.1%~100% smooth dimming<br>Working voltage: 3VDC by 2 pcs AAA battery<br>Connection: RF 2.4G Wireless, 30m remote distance from controller to LED light. No limit to the number of lights. |
|  | REI J102-4 | Model: REI J102-4<br>Control: 4 Zone Brightness Dimming, 0.1%~100% smooth dimming<br>Working voltage: 100-240VAC input<br>Connection: RF 2.4G Wireless, 30m remote distance from controller to LED light. No limit to the number of lights. |
|  | REI J103-1 | Model: REI J103-1<br>Control: 1 Tunable White+Brightness Dimming, 0.1%~100% smooth dimming<br>Working voltage: 3VDC by 2 pcs AAA battery<br>Connection: RF 2.4G Wireless, 30m remote distance from controller to LED light. No limit to the number of lights. |
|  | REI J103-2 | Model: REI J103-2<br>Control: 4 Zone Tunable White+Brightness Dimming, 0.1%~100% smooth dimming<br>Working voltage: 3VDC by 2 pcs AAA battery<br>Connection: RF 2.4G Wireless, 30m remote distance from controller to LED light. No limit to the number of lights. |
|  | REI J103-3 | Model: REIJ103-3<br>Control: 1 Zone Brightness Dimming, 0.1%~100% smooth dimming<br>Working voltage: 3VDC by 2 pcs AAA battery<br>Connection: RF 2.4G Wireless, 30m remote distance from controller to LED light. No limit to the number of lights. |
|  | REI J103-4 | Model: REI J103-4<br>Control: 4 Zone Brightness Dimming, 0.1%~100% smooth dimming<br>Working voltage: 3VDC by 2 pcs AAA battery<br>Connection: RF 2.4G Wireless, 30m remote distance from controller to LED light. No limit to the number of lights. |
|  | REI J103-5 | Model: REI J103-5<br>Control: 8 Zone Brightness Dimming, 0.1%~100% smooth dimming<br>Working voltage: 3VDC by 2 pcs AAA battery<br>Connection: RF 2.4G Wireless, 30m remote distance from controller to LED light. No limit to the number of lights. |
|  | REI J103-6 | Model: REI J103-6<br>Control: 8 Zone Tunable White+Brightness Dimming, 0.1%~100% smooth dimming<br>Working voltage: 3VDC by 2 pcs AAA battery<br>Connection: RF 2.4G Wireless, 30m remote distance from controller to LED light. No limit to the number of lights. |
|  | REI J104 | Model: REI J104<br>Control: 8 Zone Tunable White, Brightness Dimming, RGB, RGBW or RGB+CCT RF LED controller<br>Working voltage: 3VDC by 2 pcs AAA battery<br>Connection: RF 2.4G Wireless, 30m remote distance from controller to LED light. No limit to the number of lights. |


# Smart Lighting, More Comfortable

## Easy Smart Lighting Solutions

## DALI, RF, CASAMBI


### DALI Control

Wired connection
Brightness 0.1~100% dimming
Tunable white 2700~5700K

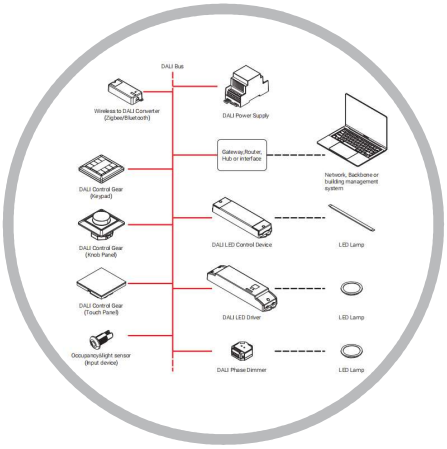

### RF Remote Control

Wireless controllers
Brightness 0.1~100% dimming
Tunable white 2700~5700K

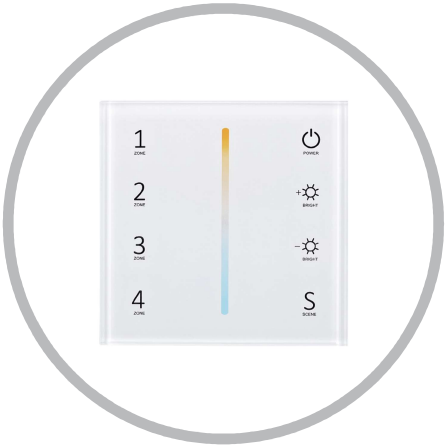



### CASAMBI App Control

Mobile bluetooth wireless
Brightness 1~100% dimming
Tunable white 2700~5700K




# DALI Control, Wired Connection

## An Example Of A DALI Lighting-control System

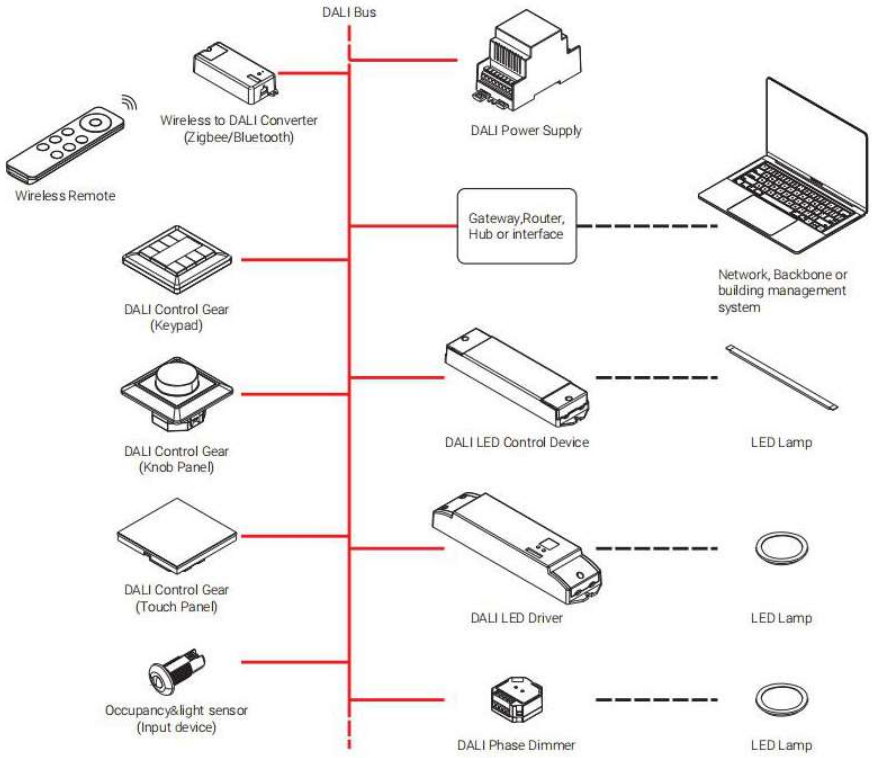



## Easy Connecting Ways Of DALI Smart Lighting

### AC100~240V Track System

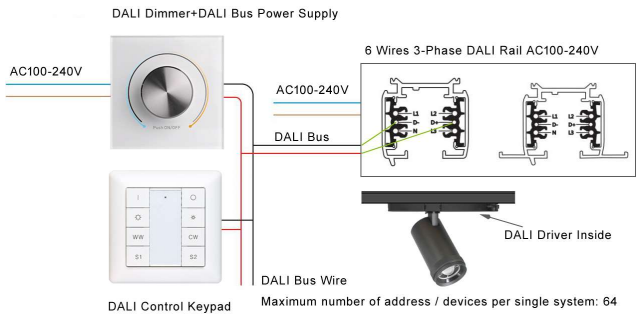


### AC100~240V Downlights

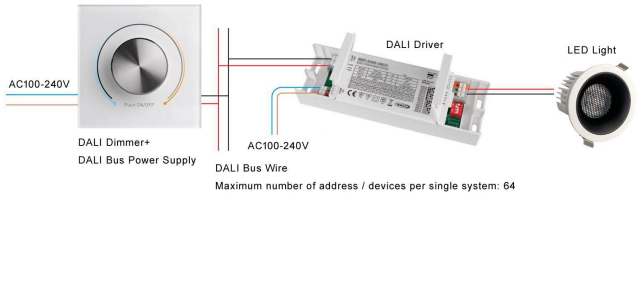



## Basic Parameters Of DALI Protocol

**Basic Parameters of DALI Protocol**


| DALI Signal Voltage | High Voltage : 9.5-22.5 V<br>Low Voltage : -6.5 – (+)6.5 V |
|---|---|
| System Current | Max : 250mA |
| Data Transmission Speed | 1200 bps |
| Maximum Cable Length | 300 m, Related to wire diameter |
| Cable Type | 1.5 mm2, Related to wire diameter |
| Maximum number of address / devices per single system | 64 |
| Maximum number of lighting scenes per single system | 16 |
| Maximum number of groups per single system | 16 |

### AC100~240V Downlights

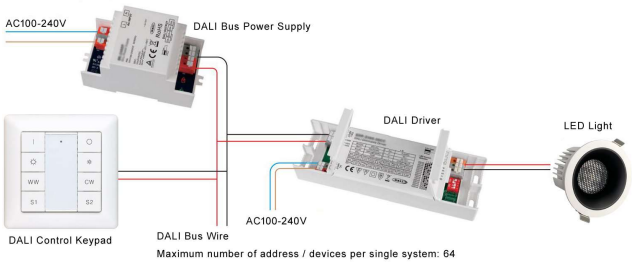

# RF Remote Control, Wireless


**Why RF Remote Control?**

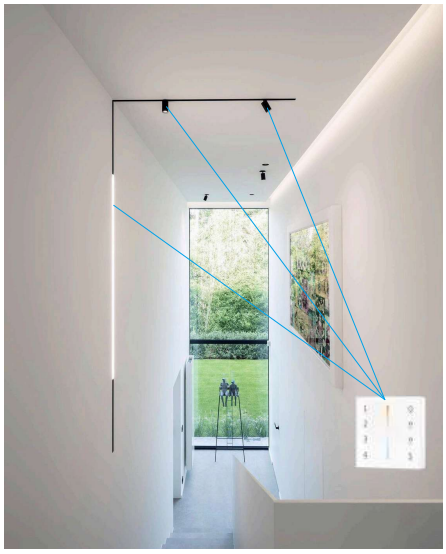

● RF remote control product is easy for smart lighting, the remote controller connects each light directly by RF 2.4G wireless signal, no wiring required.

● RF remote control product is more cost-effective than DALI or CASAMBI for smart lighting. The controllers and lights with low cost, more acceptable price for customers.

● Easy to use, no need for professionals to set up, control a luminaire to turn it on or off, adjust brightness, colour temperature, or control all lights by several groups and save lighting scenes.

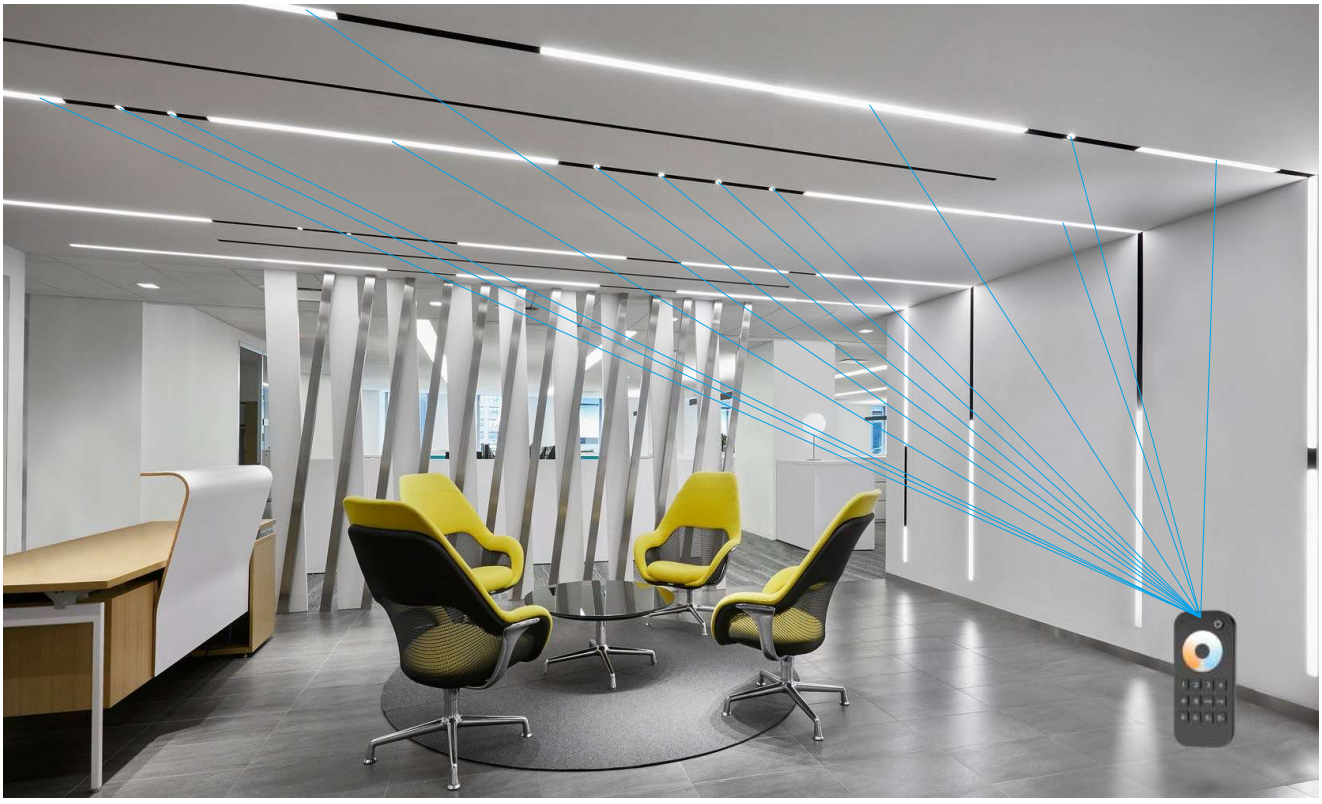



# CASAMBI App, Mobile Control

**The Casambi App**
Casambi allows people to control luminaires directly from their mobile device, using Bluetooth Low Energy, the cutting-edge communication technology is built into every modern smartphone, tablet and smartwatch.

All the users need to do is to download the Casambi app on their iOS or Android device, then they are ready to control all their light fittings.

Casambi's app is designed to make it easy for anyone to commission and control lighting. The app employs intuitive gesture control: tap a luminaire to turn it on or off, swipe side-to-side to adjust brightness, up and down for colour temperature, or hold to change the colour. The unique gallery feature even lets users upload their own photos of space, mark the positions of the luminaires, and use this to select and control them.



# Allure Verlichting

Allure Verlichting
Address: Handelsweg 6
Postcode: 7641AC Wierden
Tel.: 0031 (0) 546 579 005

Email: info@allureverlichting.nl
Web: www.allureverlichting.nl

Version 04/2023